
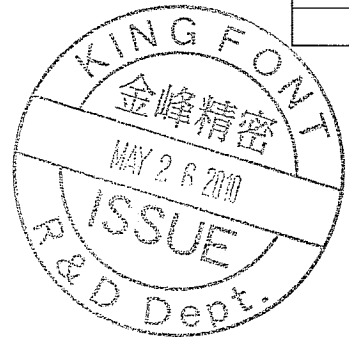


1 2 3 4 5 6 7 8

REV	MODIFICATION	DATE	DRAW

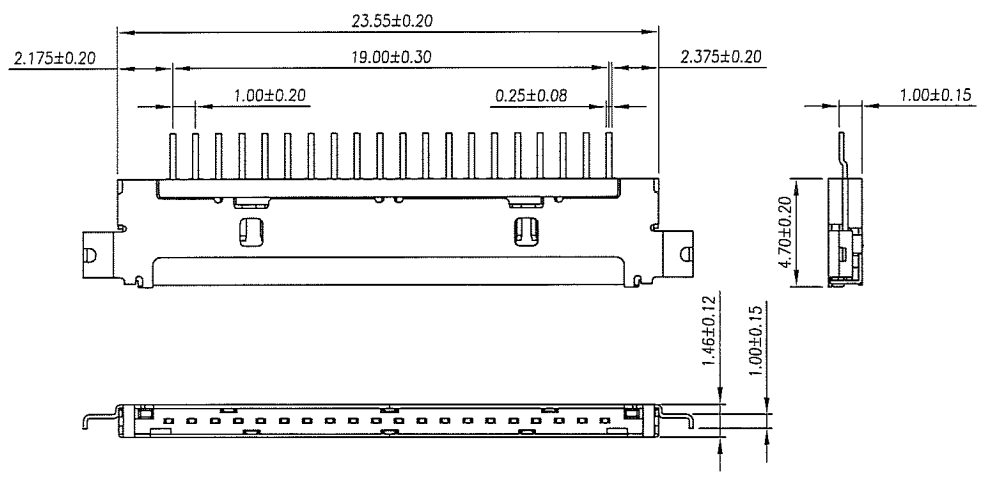

NOTES:

ELECTRICAL



- VOLTAGE RATING : 100V(AC)
- CURRENT RATING : 0.3A
- DIELECTRIC WITHSTANDING VOLTAGE : 300V AC/1min.
- INSULATION RESISTANCE : 500M min.
- TEMPERATURE RANGE : -35° C ~ +85° C

MATERIAL

- INSULATOR : NYLON 94V-0
- CONTACT : PHOSPHOR BRONZE
- REINFORCEMENT : STAINLESS STEEL

PART NO. :

MPHTJ-12001AP20

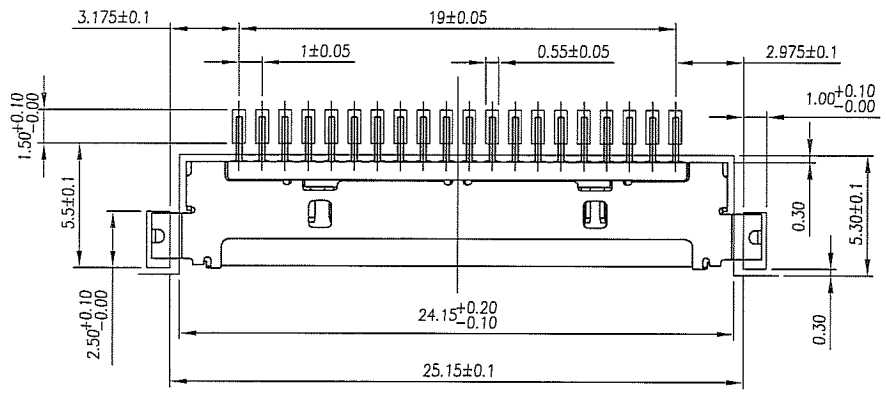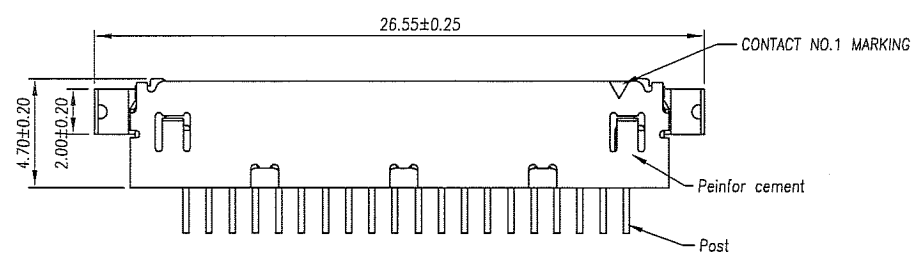

PCB LAYOUT

DIMENSION IN mm [inch]		PROD. SPEC.	KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE 1.0mm WAFER SMT CUSTOMER DRAWING	
.X±	.X'±	APPROVE <i>Grom</i>	FILE NO.	DWG NO. MPHTJ-12001AP20
.XX±	.X'±	CHECK <i>Tony</i>	SIZE A4	PROJ.  SHEET 1 / 1
.XXX±	.XX'±	DRAW <i>Sam</i>	SCALE 1:1	REV A

1 2 3 4 5 6 7 8 8F-06-R02