



# JVP 720

231 / 400 V – 50 Hz





### **GENERATOR GENERAL INFORMATION**

GENERATOR	FREQUENCY	VOLTAGE	POWER FACTOR	SPEED	DIESEL EI	NGINE	ALTERN	ATOR		TYPE OF	GENER	ATOR O	UTPUT
Model	Hz	V	Cos Q	Rpm	Brand	Model	Brand	Model	Series	Operation	kVA	kW	А
										Standby	720,0	576,0	1.040,5
JVP 720	50	231/400	0.8	1500	Volvo Ponta	TWD1644GE	BENER	JCB	355M1	Prime	654,5	523,6	945,9
		Penta Penta	ΥGY.	CY CY				Continuous	458,2	366,5	662,1		

<ul> <li>Diesel Engines with Advanced Technology and Quality</li> <li>Alternators with Advanced Technology and Quality</li> </ul>	<ul> <li>Tropical 50 °C Radiator, First Class Product Support</li> <li>Fuel Filter with Water and Particle Separator</li> </ul>
Low Exhaust Emission	Low Fuel Consumption, Low Oil Consumption
<ul> <li>Control Panel Suitable for Flexible Application</li> </ul>	<ul> <li>Global Technical Service and Maintenance Support</li> </ul>
<ul> <li>Patented Compact Designed and Sound proof Canopy</li> </ul>	<ul> <li>Wide Range of Affordable Spare Parts</li> </ul>
<ul> <li>Low Operating Cost, Suitable for Heavy-Duty</li> </ul>	<ul> <li>High Quality and Reliable Technology</li> </ul>
<ul> <li>Durability, Low Noise Level</li> </ul>	<ul> <li>Half Century Experience in Generator Manufacturing</li> </ul>

#### STAND BY POWER RATING - (ESP):

ESP is applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the Stand by Power rating. This rating should be applied where reliable utility power is available. A Stand By rated engine should be sized for a maximum of an 70% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Stand by Power rating. Stand By ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency.

#### PRIME POWER RATING - (PRP):

Applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories:

#### UNLIMITED TIME RUNNING PRIME POWER (ULTP):

PRP (Prime Power) is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of the Prime Power rating during any operating period of 250 hours. The total operating time at 100% Prime Power shall not exceed 500 hours per year. A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year.

#### LIMITED TIME RUNNING PRIME POWER (LTP):

LTP (Limited Time Prime Power) is available for a limited number of hours in a no variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation

#### CONTINUOUS POWER RATING (COP):

COP is the power that the engine can continue to use under the prescribed speed and the specified environment condition in the normal maintenance period stipulated in the manufacturing plant. And Continuous Power is applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.



231 / 400 V – 50 Hz





# PAY ATTENTION TO THE POINTS BELOW IN PICKING AND

#### **USING THE GENERATOR**

\* Generators can work on Continuous Power at 70% of Prime power value if only all maintenances are done on time with original spare parts and high-quality oils that manufacturer advice.

\* Generators should not operate below 50% of Prime Power value. In such a case, the engine will burn excessive oil and eventually have irreparable damage.

\* If your need is 1000 kVA or above, you should prefer Synchronic Systems with 2-3 generators with failure back up and simultaneous aging.

\* These points will provide advantage for you with purchasing and operating the generator.


#### **GENERATOR DIMENSIONS AND TECHNICAL DRAWINGS**






VALUES		OPEN TYPE GENERATOR	CANOPY TYPE GENERATOR
WIDTH	mm	1400	1900
LENGTH	mm	3629	5000
HEIGHT	mm	2453	2300
WEIGHT (NET)	Kg	3985	5595
FUEL TANK CAPACITY	L	1041	532

SYMBOL	OPEN	CANOPY
L	3629	5000
W	1400	1900
н	2453	2300
S	-	650
А	510	
В	1250	
с	1350	
D1		1057
D2		961
D3		961
D4		961
D5		961



PERCENT OF PRIME POWER	FUEL CONSUMPTION				
	l/hr				
110 %	155,3				
100 %	139,9				
75 %	103,9				
50 %	71,6				







#### **DIESEL ENGINE MAIN TECHNICAL PARAMETERS**

GENERAL		
Number of Cylinders		6
Configuration		Vertical, in line
Aspiration		Turbo Charged & WAC
Combustion System		Direct injection
Compression Ratio		16.8:1
Bore	mm	144
Stroke	mm	165
Displacement	L	16,12
Governing Type	-	Electronic
Governing Class		G3
Rotation		Counterclockwise
Firing Order		1-5-3-6-2-4
Emission		EU Stage 2
FILTERS		
Air Filter		Dry Type, Replaceable
Fuel Filter		Element type, Replaceable
Oil Filter		Element Type, Particulate Trap
ELECTRICAL SYSTEM		
Voltage	V	24
Starter	kW	7
Alternator Output Ampers	A	80
Alternator Output Voltage	V	28
Batteries Capacity	Ah	2x135
FAN	7.01	2/100
Diameter	mm	965
Drive Ratio		1.04:1
Number of Blades		9
Material		Composite
Туре		Blowing
COOLING SYSTEM		510 million
Radiator Type	50ºC	Tropical
Total Coolant Capacity	L	142
Max. Perm. Coolant Outlet Temperature	°C	105
Max. Perm. Flow Resist. (Cool. System And Piping)	bar	0,5
Max. Temperature of Coolant Warning	°C	95
Max. Temperature of Coolant Shutdown	°C	98
Thermostat Operation Temperature - Initial Open	°C	82
Thermostat Operation Temperature - Full Open	°C	92
Delivery of Coolant Pump	m ³/ h	4,80
Min. Pressure Before Coolant Pump	bar	0,25
Radiator Face Area	m <sup>2</sup>	1,68
Rows	Row	4
Matrix Density	Per / Inch	10
Material		Aluminum
Width of Matrix	mm	1280
Height of Matrix	mm	1385
Pressure Cap Setting	kPa	90
Estimated Cooling Air Flow Reserve	kPa	0,125
Engine Pre Heater-Tube (with Circulation Pump)	W	3000
Engine i re neater-rube (with circulation rump)	vv	5000





#### **DIESEL ENGINE MAIN TECHNICAL PARAMETERS**

LUBRICATION SYSTEM		
Total System	L	48
Minimum Oil Level	L	32
Nominal Motor Operating Temperature	₽C	50
Lubricating Oil Pressure (Rated Speed)	bar	6,5
Relief Valve Opens	kPa	460
Oil / Fuel Consumption Ratio	%	0,1
Normal Oil Temperature	₅C	130

### **DIESEL ENGINE MATCHING PARAMETERS - 50 HZ**

50 HZ @ 1500 R/MIN		STAND BY
Gross Engine Power	kW	630,0
Net Engine Power	kW	613,0
Fan Power Consumption (Belt Pulley Driven)	kW	17,0
Other Power Loss	kW	-
Mean Effective Pressure	MPa	3000,00
Intake Air Flow	m <sup>3</sup> / min	43,50
Exhaust Temperature Limit	₽C	501
Exhaust Flow	m ³/ min	106,00
Boost Pressure Ratio		26,00
Mean Piston Speed	m / s	8,3
Cooling Fan Air Flow	m ³/ min	559,0
Typical Generator Output Power	kVA	728
HEAT REJECTION		STAND BY
Energy in Fuel (Heat of Combustion)	kW	1550,0
Gross Heat to Power	kW	645,0
Energy to Coolant and Lubricating Oil	kW	240,0
Energy to Exhaust	kW	470,0
Heat to Radiation	kW	26,0



# JVP 720

231 / 400 V – 50 Hz



#### **ALTERNATOR SPECIFICATIONS**



ALTERNATOR TECHNICAL	L PARAMETERS				
Insulation Class		Н	Field Control System		Self-Excited
Winding Pitch		2/3 - (N° 6)	A.V.R. Model	Standard	SX440
Wires		12	Voltage Regulation	%	± 1
Protection		IP 23	Sustained Short-Circuit Current	10 sec	300% (3 IN)
Altitude	m	1000	Total Harmonic (*) TGH / THC	%	< 4
Overspeed	rpm	2250	Wave Form: NEMA = TIF - (*)		< 50
Air Flow	m³/sec.	1.035	Wave Form: I.E.C. = THF - (*)	%	< 2
Bearing Drive	N/A	-	Bearing Non-Drive	Bearing	6314-2RZ
Rotor Winding	100%	Copper	Stator Winding	100%	Copper

# **ALTERNATOR SPECIFICATIONS**

50 HZ / 231-400V COSQ 0,8 / 1500 RPM									
STANDARD USING ALTERNATOR				OPTIONAL USING ALTERNATOR					
BRAND/MODEL	JCBENERGY	JCB 355M1		LEROY-SO	OMER	TAL047F	STAMFORD	S5L1D-F	:
DUTY				Continuous			-	Stand By	
AMBIENT	C°			40°C				27°C	
CLASS / TEMP. RISE	C°			Н/ 125° К				H/ 163° K	
SERIES STAR	V	380/220	400/231	415/240	1 Phase	380/220	400/231	415/240	1 Phase
PARALLEL STAR	V	190/110	200/115	208/120	220	190/110	200/115	208/120	220
SERIES DELTA	V	220	230	240	230	220	230	240	230
OUTPUT POWER	kVA	659,0	659,0	684,0	-	725,0	725,0	752,0	-
OUTPUT POWER	kW	527,0	527,0	547,0	-	580,0	580,0	602,0	-



# JVP 720

231 / 400 V – 50 Hz



### **CONTROL MODULE ALERTS**

Emergency Stop Malfunction High Generator Frequency Low Generator frequency, Low Load Over Current, Unbalanced Current Low Generator Voltage High generator Frequency Phase sequence error Overload, Heat Sensor Broken Low Water Level (Optional) Low Oil Pressure, Reverse Power Low Water Temperature

#### Start Error, Stop Error Magnetic Pickup Error Charge Alternator Error Unbalanced Load Maintenance Time Alarm Low Speed, High Speed Broken Oil Sensor Cable High Oil Temperature (Optional) Low Fuel Level (Optional), High Battery Voltage Low Battery Voltage, High Water Temperature Electronic Can bus Errors (ECU)



- Powder Painted Steel Panel with Lockable Door
- ATS (Automatic Transfer Panel)-Optional
- o Control Module
- Battery Charger
- Emergency Stop Button
- o Terminal Blockso Load Output Terminal
- System Protection MSBs
- Circuit Breaker-Optional
- LCD Screen
- Control Relays
- Backlit, 128x64 Pixels

## **CONTROL MODULE TECHNICAL PARAMETERS**

CONTROL PANEL SPECIFICATIONS

Brand	JEBENERGY	Brand	Trans-MIDIAMF.232.GP
Dimensions	120mmx94mm.	Protection Class	IP65 From the Front
Weight	260 gr.	Environmental Conditions	2000 meters above sea level
Ambient Humidity	Max. %90.	Ambient Temperature	-20°C to +70°C
DC Battery Supply Voltage	8 - 32 V	Battery Voltage Measurement	8 – 32 V
Network Frequency	5 - 99,9 Hz	Mains Voltage Measurement	3 - 300 V phase -Neutral, 5 - 99,9 Hz
Generator Voltage Measurement	3 - 300 V	Generator Frequency	5 - 99,9 Hz
Current Transformer Secondary	5A	Working Period	Continuous
Charge Alternator Voltage Measurement	8 - 32 V	Charge Alternator Excitation	210mA &12V, 105mA &24V Nominal 2.5W
Communication Interface	RS-232	Analog Sender Measurement	0 - 1300ohm
Generator Contactor Relay Output	5A & 250V	Mains Contactor Relay Output	5A & 250V
Solenoid Transistor Outputs	1A with DC Supply	Start Transistor Outputs	1A with DC Supply
Configurable-3 Transistor Outputs	1A with DC Supply	Configurable-4 Transistor Outputs	1A with DC Supply







## **CONTROL MODULE FUNCTION**

Mains Voltage Level Control	Generator Voltage Level Control	3 Phase Generator Protections	3 Phase AMF Function	Alarm Horn
Network Frequency Level Control	Generator Frequency level Control	- High / Low Voltage	- High / Low Frequency	Heater Tube Thermostat Control
Engine Operating Option Control	Generator Current Level Control	- High / Low Frequency	- High / Low Voltage	Modbus and SNMP
Engine Stop Option Control	Generator Powder Level Control	<ul> <li>Current / Voltage</li> <li>Asymmetry</li> </ul>	- High / Low Water Temperature	Working Hour
Engine Speed (RPM) Level Control	Generator work Schedule and Timing Control	- Overcurrent / Overload	- High / Low Load	Ground Leakage
Battery Voltage Options Times	Oil Pressure Controllers Control	Overheat Control	Mains., Generator ATS Control	Analog Modem
Check Engine Maintenance Times	Configurable Analog Inputs and Outputs	1 Phase or 3 Phase, Phase Selection	Network, Voltage, Frequency Display	Ethernet, USB, RS232, RS485
Communication Interfaces GPRS, GSM	Keeping Error Records of Past Events	Parameter Setting via Control Module	Parameter Setting via Computer	Selectable Protection Alarm / Shutdown
Engine Speed, Voltage, Earning	Configurable Programmable Digital Inputs and Outputs	Water Temperature Current and Frequency	Hours of Operation Phase sequence	Battery Voltage Oil Pressure

#### SOUND PROOF CANOPY AND BASE FRAME (CHASIS) SPECIFICATIONS




- Special, Registered JCB Energy Design and Colour
- A1 Quality DKP / HRU / Galvanized Steel
- Sensitive Twist on Automatic Press Brake
- Delicate Cut on Automatic Punch and Laser Bench
- Sensitive Welding on Robotic Welding Bench
- Chemical Cleaning Nano Technology Before Painting
- Robotic Painting with Electrostatic Powder Paint
- Drying and stabilizing on 200 °C Ovens
- 1500 Hour Salt Test
- Glass wool Isolation, A1 Class Material -50/+500 ℃
- Special Covering Over Glass Wool
- Best Sound Level (in Dba)
- Temperature Tests
- Rustproof Accessories

- Cable Exit Connectors and Glands
- Emergency Stop Button
- Fuel Level Gauge
- Fuel Drain Cap
- Fuel Inlet and Return Records
- I permeability Test for Fuel Tank
- Vacuumed Rubber Mounted
- High Quality weatherstrips
- High Quality Shock Absorbers
- Fuel Filling Cap (with ventilation)
- Lifting and Carrying Equipment
- Internal Exhaust Mufflers (Silencers)
- External Exhaust Mufflers (Silencers)
- Radiator water Filling Cap
- Daily Fuel Tank, External Fuel Tank

# **Our Quality Certificates**

Certificate of Registration 👝		Certificate of Registration 🙈	
This is to certify that the Quality Management System of		This is to certify that the Environmental Management System of	
JEBENERGY		JEBENERGY	
JCB ENERGY ELECTRIC POWER INDUSTRY		JCB ENERGY ELECTRIC POWER INDUSTRY	
CALLE DE TRESPADERNE, NUM 7 PLANTA 3, PUERTA C 28042 MADRID - (MADRID), SPAIN		CALLE DE TRESPADERNE, NUM 7 PLANTA 3, PUERTA C 28042 MADRID - (MADRID), SPAN	
is in accordance with the requirements of the following standard		is in accordance with the requirements of the following standard	
ISO 9001:2015 (Quality Management System)		ISO 14001:2015 (Environmental Management System)	
SCOPE		SCOPE	
MANUFACTURING, SALES AND SERVICE OF GENERATOR AND GENERATOR COMPLEMENTS, WATER PUMP, FORMLIFT, UPS, REGULATOR, CONVERTERS, SHUTTER POWER SUPPLIES		MANUFACTURING, SALES AND SERVICE OF GENERATOR AND GENERATOR COMPLEMENTS, WATER PUMP, FORKLIFT, UPS, REGULATOR, CONVERTERS, SHUTTER POMER SUPPLES	
(AF Code: 18,19)		(AF Code: 18,19)	
tah Number 2002201342 <b>verify contificate, visit_at :</b> overscent.com ps_thatmacreatiliter.org ps_thatmacreatiliter.com	Initial Registration Data : 35-001-0000 11 Securalizanta Data : 35-001-0000 21 Securalizanta Data : 35-001-000 21 Securalizanta Data : 35-001-0000 Centitiaata Eupoy Data : 36-001-0000	Centrolw Number (2002)(2011) Too vecify, contificate, visit, at ; very warsherd, com https://www.identecrycitation.org https://www.identecrycitation.org	initial Registration Date : 25-04-3828 1° Servivillance Date : 25-54-98288 2° Serve Pance Date : 35-54-9828 Constraint Suppl Date : 24-06-8289
Issued by ABS Assessment Private Limited		Blued by ASS Assessment Proste Linker	
UAF (AB)			



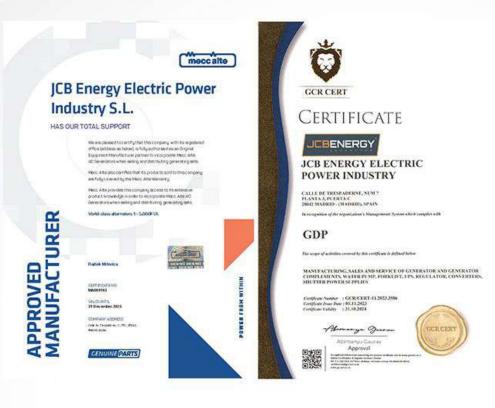



JEBENERGY

JCB ENERGY ELECTRIC POWER INDUSTRY

CALLE DE TRESPADERNE, NUM? PLANTA 3, PUERTA C 28642 MADRED - (MADRED, NPAEN

nition of the organization's Management System which complex with

1SO 22716:2013:GMP GOOD MANUFACTURING PRACTICES The scope of extinuous cannot by this confidence is defined below

MANUPACTURING, SALLS AND SERVICE OF GENERATOR AND GENERATOR COMPLEMENTS, WATER FUMP, FORKLIFT, UPS, REGULATOR, CONVERTERS, SIGTTER POWER SUPPLIES

Complexer Number 3 GCRCERT-11.2023.3585 Complexer Journ Date (#1.11.2023 Complexer Failury 1.31.318,2024

Alemany games Abimaryu Casaw Approval

Ki gabad Matania anang Ki Kabal Kelang Ki Igaba anang Ali Selaharan Yang Ki Kabalan Ki Kelang Ki Ki Kabalan Ki Kelang Ki Ki Kabalan Ki Kabalan Kabalan GUR CERT



Certificate

HEALTHY & SAFE WORKPLACE CERTIFICATE

JCB ENERGY ELECTRIC POWER INDUSTRY


CALLE DE TRESPADERNE, NUM 7 PLANTA L'PUERTA C 20042 MADRID+ (MADRID), SPAIN that been writted to obtain a Healthy and Safe Workplace Certificate by fulfilling the equiversets for COVO-19 resources, when the physical conditions of the business ch is the scope of the Healthy and Safe Workplace Certificate program.


FACTORIES - PRODUCTION LOCATIONS: ELECTRICAL AND ELECTRONICS INDUSTRY

Conglow Namber 1 GCRCERT-11.2023.3658 Conglow New Day 97.11.2023 Conglow Holdy 105.11.2023



Alemanya Game Azimanyu Caucav Approval

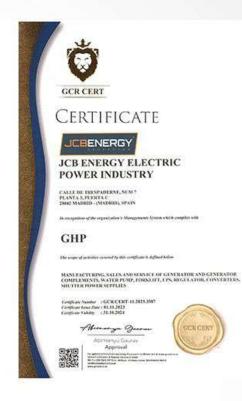

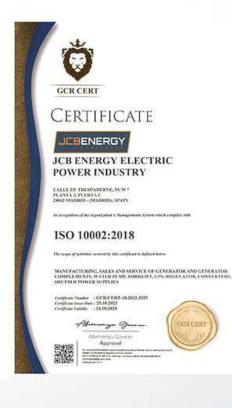



00



n -

www.jcbenergy.es