

## Two-side labeling

Do you still believe  
that performance is  
a matter of size?



## Two-side labeling

# The 362E demonstrates its capabilities – in a very tight space

You are aiming for high throughput but have very little space? The 362E is the ideal solution for this scenario. Offering the best of two worlds, it is versatile, very robust and as good at product alignment and stabilization as its high-end sister version from the M series, with a footprint as compact as the entry-level models from the C series. Extremely short changeover times and an excellent price-performance-ratio make it an ideal candidate for a wide range of tasks.



## Best results

Two high-performance applicators ensure high throughput – even during continuous operation.

The machine's design requires no protective housing, thereby saving space. Thanks to its closed stainless steel base the labeling machine is extremely stable.

Handwheels with digital position indicators enable users to replicate optimal settings at any time.



1



2



3



4

## Useful options

The machine can be converted to wrap-around labeling in little time.



5

Featuring a label presence check and a product reject station the 362E qualifies for especially demanding tasks.



6


A control panel including PLC control with intuitive user guidance ensures ease of use.



5

### Technical data

Labeling type:	Two-side labeling • wrap-around labeling (optional)
Product specifications:	Rectangular, flat-arched to oval, cylindrical, free-standing
Product dimensions:	Two-side labeling: 30 - 200 x 30 - 120 x 30 - 300 mm (L x W x H) Wrap-around labeling: 20 - 100 x 30 - 250 mm (D x H)
Label dimensions:	Two-side labeling: 15 - 240 x 30 - 200 mm (W x L) Wrap-around labeling: 15 - 240 x 30 - 315 mm (W x L)
Capacity:	Up to 200 products/minute
Power supply:	400 V, TN-C-S, 50 Hz, 3 phases 208 V, Delta 4-wire, 60 Hz, 3 phases (optional)
Compressed air supply:	6 bar
Printer:	Various hot-foil and thermal transfer printers (optional)
Components:	Control panel with 7 inch touchscreen, conveyor belt, side guides for products, belt-type separator, chain aligner, top belt, applicators, wipe-down station
Options:	Transfer plates at infeed and outfeed, wrap-around labeling with wrap-around belt and counterpressure plate or roller prism, wrap-around labeling with wrap-around roller and roller prism, moveable version, aligned wrap-around labeling, 3 <sup>rd</sup> applicator, label presence check, product reject station
Note:	If optional features are chosen, the above data may vary

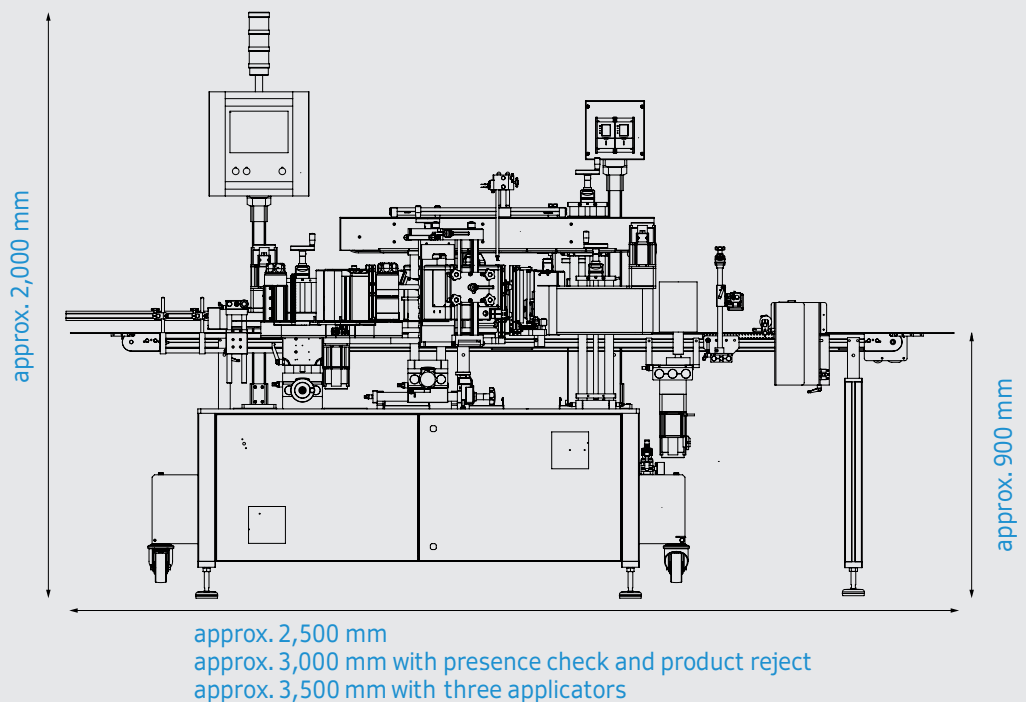

362E in video

HERMA GmbH  
Labeling Machines Division  
Heinrich-Hermann-Straße 14  
70794 Filderstadt  
Tel. +49 (0) 711 / 7702-6012  
[www.herma.com/machines](http://www.herma.com/machines)  
[machines@herma.com](mailto:machines@herma.com)