

# Adjustable Clicker Torque Wrench – SCL-MH



Fig.: SCL100N-9X12-MH



## Adjustable Clicker Wrench with Metal Handle

A slim and robust torque spanner for tightening various types of screws on production lines. Suitable for use in greasy environments (oil, chemicals, etc.) such as workshop work. Equipped with rectangular socket for use with standard interchangeable sockets to European specification S9 or S14.

The torque can be set quickly and easily using the rotary knob and scale. The generously dimensioned rotary knob makes it easy to select the desired torque, even with oily hands.

A clear clicking sound from the internal tilting mechanism signals the end of the tightening process as soon as the set torque has been reached.

- ▶ Audible and tactile release in clockwise rotation.
- ▶ Rectangular insert 9×12 or 14×18 mm for interchangeable heads.
- ▶ Improved adjustment and locking mechanism.
- ▶ Robust, oil and chemical-resistant knurled metal handle.
- ▶ Torque adjustment via rotary knob.
- ▶ Accuracy ± 3% acc. EN ISO 6789:2017.
- ▶ Exceptionally elegant finish thanks to striking coating.

### Options / Alternatives

INFO

- Plastic Molded Storage Box (colour depending on model)
- Further models and versions available, like e.g. below:




Series CL-MH for Tohnichi round-style heads.



Series SCL with plastic handle.

### Model SCL-MH

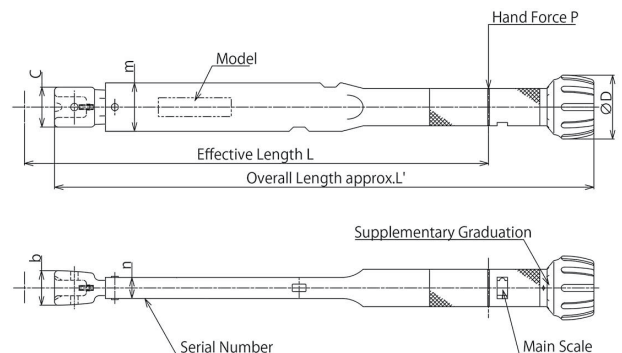

### SCL-MH

Accuracy ± 3%

Model	Item No.	Torque Range* N·m	Graduation N·m	Head mm	Weight kg	Dimensions [mm]						
						L	L'	m	n	D	C	b
SCL2N-9X12-MH	T212420	0.4 - 2	0.02	9x12	0.15	122	153	19	9.2	25.5	20	17
SCL5N-9X12-MH	T212421	1 - 5	0.05	9x12	0.15	122	153	19	9.2	25.5	20	17
SCL10N-9X12-MH	T212422	2 - 10	0.1	9x12	0.18	157	187	19	9.2	25.5	20	17
SCL15N-9X12-MH	T212423	3 - 15	0.1	9x12	0.18	157	187	19	9.2	25.5	20	17
SCL25N-9X12-MH	T212424	5 - 25	0.25	9x12	0.22	182	215	19	9.2	26.5	21	18
SCL50N-9X12-MH	T212425	10 - 50	0.5	9x12	0.4	195	239	25.5	11.2	36	23	20
SCL100N-9X12-MH	T212426	20 - 100	1	9x12	0.58	269.5	313	28	12.2	37	23	20
SCL200N-14X18-MH	T212427	40 - 200	2	14x18	1.28	420	464	35	15	46.5	30	26

\* Table showing specifications by manufacturer. Usage in moderate performance range (approx. 1/3 to 4/5 of rated capacity) is recommended. If you regularly worked close to the limit of load (maximum capacity), a larger model or tool might be more advisable.



Further info on our website.  
24/7