
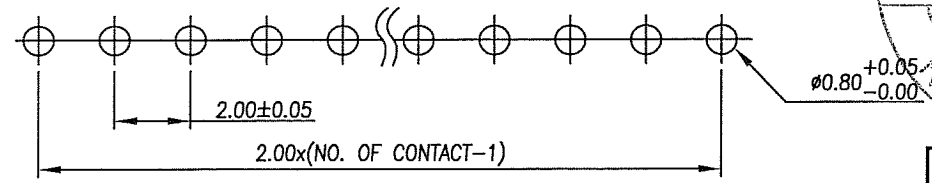
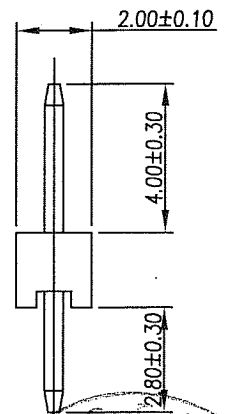


1 2 3 4 5 6 7 8

REV	MODIFICATION	DATE	DRAW
B	EN-07-1234	96.12.31	SAN
C	EN-11-0623	100.06.29	Stacy
D	EN-11-1213	100.12.12	Chris

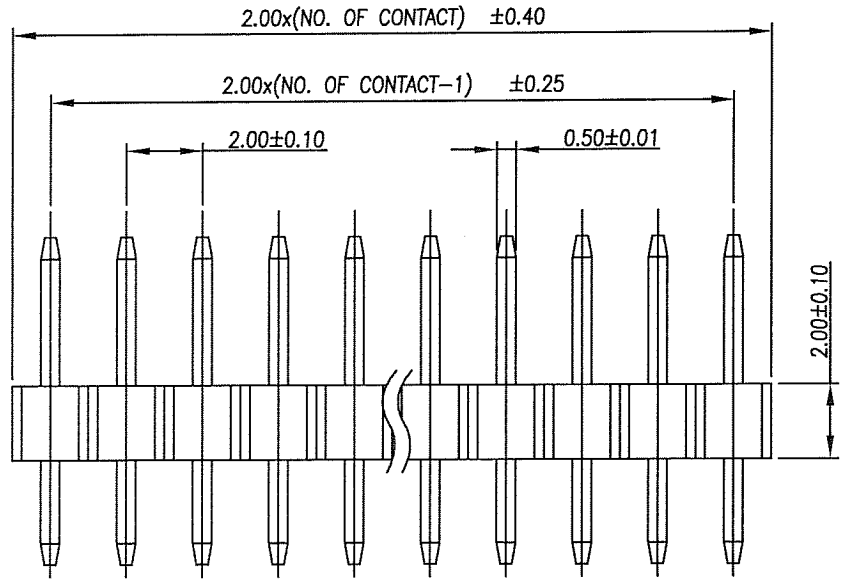

P.C.B LAYOUT

NOTES:

SPECIFICATION

- 1.Current Rating: 1A
- 2.Withstanding Voltage: 600 VAC (1 Minute)
- 3.Insulation Resistance: 1000 Megohms Min.
- 4.Contact Resistance: 30 Milliohms Max.
- 5.Operating Temperature: -40°C to +85°

MATERIAL

- 1.Contact: Phosphor Bronze
- 2.Insulator:P.B.T + 30% G.F & NYLON-6T & LCP
- 3.Plated:
 UNDERPLATING : NICKEL PLATING FOR ALL 80u"~120u"
 ALL PLATING : TIN PLATING
 PLATING 100u"~200u".

ORDER INFORMATION


MPHSI-1 XX XX X 000- G

NO. OF CONTACT

COMPLY TO RoHS

N=Nylon-6T
L=LCP
B=PBT

01:GOLD FLASH
30:30u" GOLD PLATING

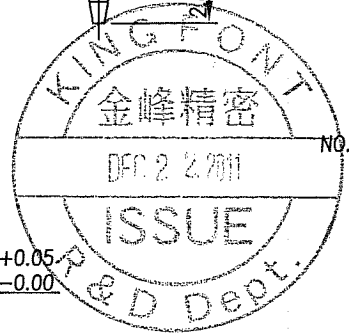

DIMENSION IN mm [Inch]		PROD. SPEC.	C KINGFRONT KINGFRONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE	CUSTOMER DRAWING
.X±0.30	X'± 1"	APPROVE <i>Gam</i>	HEADER MALE 2.00mm S/R R/A	
.XX±0.20	.X'± 0.5"	CHECK <i>Lowy</i>	FILE NO.	DWG NO. MPHSI-1XXXXX000-G
.XXX±0.10	.XX'± 0.25"	DRAW <i>CHRIS</i>	SIZE A4	PROJ. SHEET 1 / 1
			SCALE 5:1	REV D

1 2 3 4 5 6 7 8 8F-06-R02