


# FDSS 532-1000

Diode pumped passively Q-switched solid state laser


- 532 nm
- single pulse
- < 1.8 ns
- 1 – 80 Hz
- > 1000  $\mu$ J

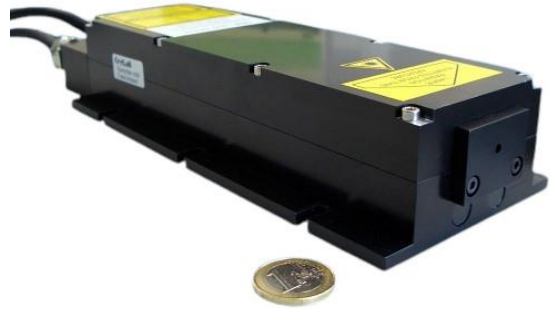



## biology · biomedicine · chemistry · analytics

<b>Optical Data</b>	Wavelength	532 nm
	Spatial Mode	TEM <sub>00</sub>
	Beam Divergence (full angle)	< 6.5 mrad
	Beam Ellipticity	< 2:1
	Waist Diameter	500 $\pm$ 150 $\mu$ m (located at about 110mm inside the laser head)
	Beam Diameter	1000 $\pm$ 300 $\mu$ m (at laser exit)
	Peak Power	> 550 kW @ 20 Hz
	Pulse Energy	> 1000 $\mu$ J @ 20 Hz
	Pulse Repetition Rate (with external trigger)	1 - 80 Hz
	Pulse Width (FWHM)	< 1.8 ns
	Polarization Ratio	> 100:1, vertical
	Long term pulse energy stability (6 hours) <sup>1)</sup>	< $\pm$ 5 %
	Pulse-To-Pulse Stability <sup>2)</sup>	< 5 % rms
	Laser Classification	3B / IIIb
<b>Optical Output</b>	Free Beam	
<b>Electrical Data</b>	Electrical Power Consumption	< 150 W
	Line Voltage	100 - 240 V AC (50-60 Hz) or 24 V DC
<b>Interface</b>	RS 232, USB	
<b>Miscellaneous</b>	Warm-up Time	< 15 min
	Operating Temperature	18 - 38 °C
	Laser Head Size	217 x 65 x 45 mm (core dimensions)
<b>Options</b>	SMA-connector for fiber with core diameter $\geq$ 400 $\mu$ m	
	Synchronization signal output (rise time < 2 ns)	
	Manual shutter or electrical beam blocker	
	Manual or electrical driven wavelength switch 532 nm / 1064 nm	
	Manual or electrical attenuator	
	External telescope (e.g. M=5)	
	Heat sink with fan (recommended for repetition rates > 20 Hz)	
	Stand Alone System (incl. key-switch, heat sink, manual shutter; CDRH compliant)	
<sup>1)</sup> Drift over 6 hours, energy averaged over 10 sec after 5 min of continuous operation, temperature variation < 3 °C/hour. <sup>2)</sup> RMS over 1000 pulses after 5 min of continuous operation.		

# Laser Head and Controller

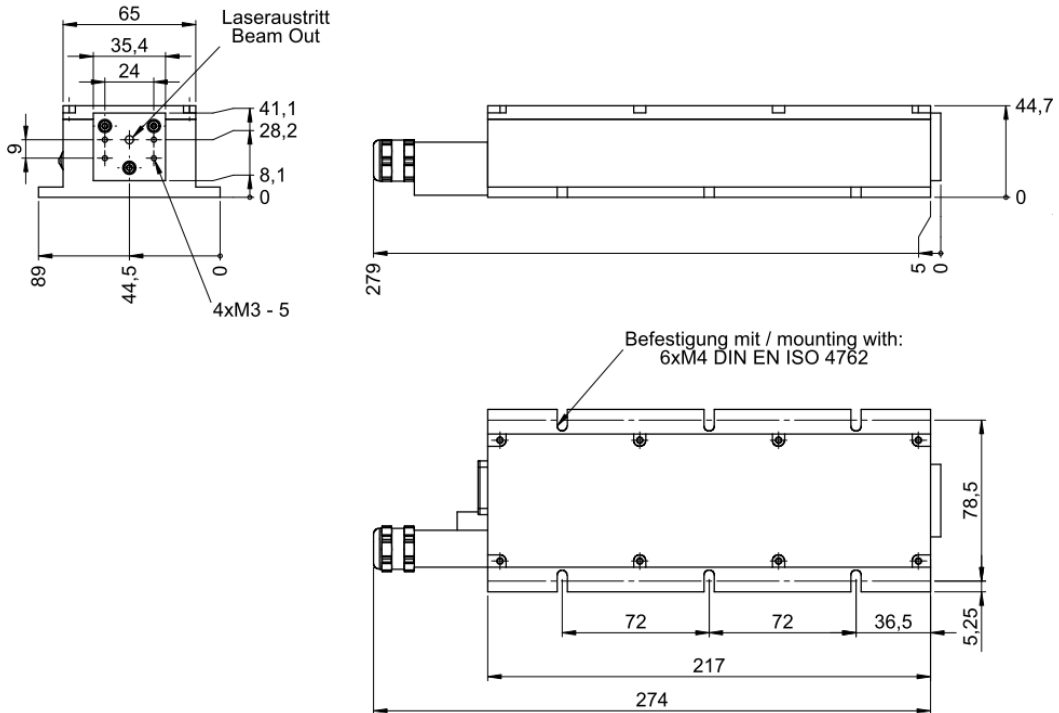

OEM-Controller

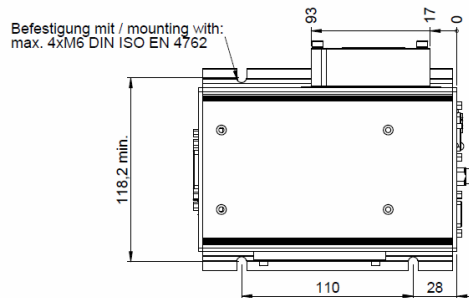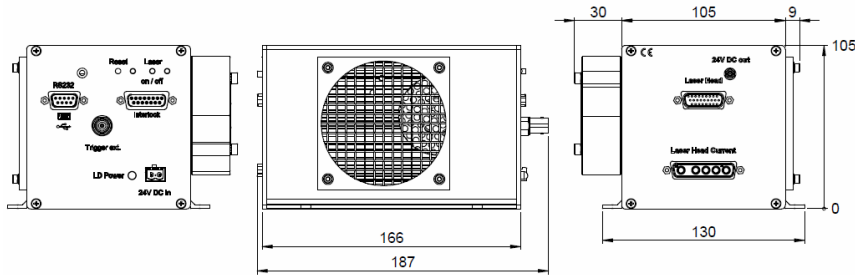

## Laser Safety Labels

The FDSS532-1000 lasers are class 3B / IIIb according to IEC 60825-1:2014

<p>wavelength: 532 nm  max. output: 2 mJ  pulse duration: &lt;1.8 ns  max. repetition rate: 80 Hz</p> <p>Complies with IEC 60825-1:2014  Complies with 21CFR 1040.10 and 1040.11  except for deviations pursuant to  Laser Notice No. 50, dated July 26, 2001</p>	<p><b>WARNING - VISIBLE  LASER RADIATION  AVOID EXPOSURE  TO BEAM</b></p> <p><b>CLASS 3B  LASER PRODUCT</b></p>	<p>IS EMITTED FROM THIS  APERTURE</p> <p>LASER  RADIATION</p>
---	---	---

