


Notes:
 Material: Phosphor Bronze(C5191-H)
 SIMM Card Connector
 Type 1,8 Pin
 Physical:
 Housing: LCP UL 94V-0
 Contact: Selective Gold Flash
 Specifications:
 Voltage Current rating: 1A. 50V AC
 Insulation Resistance: 1000Mohm Min
 Contact Withstanding Voltage:
 AC 500V For 1 Minute
 Temperature Rating: -40° To +85°

REV	MODIFICATION	DATE	DRAW
L	EN-12-1006	2012/10/16	Tony
M	EN-13-0519	2013/05/28	EvanTeng
N	ECN2-00000400	2016.05.24	Moya

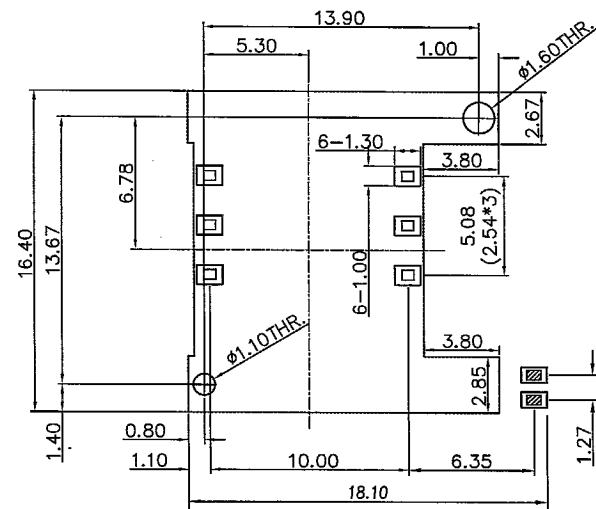


ORDER INFORMATION
 SIMMP-006 XX B X OX-G
 COMPLY TO RoHS
 0 TUBE
 1 TAPE REEL
 0 WITH POST
 1 WITHOUT POST
 PLATING
 01:GOLD FLASH
 15:15u" GOLD PLATING



DIMENSION IN mm [Inch]		PROD. SPEC.	KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE SIM CARD CONN. CUSTOMER DRAWING	
.X±0.25	X'±2'	APPROVE <i>Crom</i>	FILE NO.	DWG NO. SIMMP-006xxBx0x-G
.XX±0.15	.X'±1'	CHECK <i>005p</i>	SIZE A4	PROJ. SHEET 1 / 2
.XXX±0.10	.XX'±	DRAW <i>Moya</i>	SCALE 2.5:1	REV N

PACKING INFORMATION


Tape carrier packing information
Carrier Dimensions Diagram

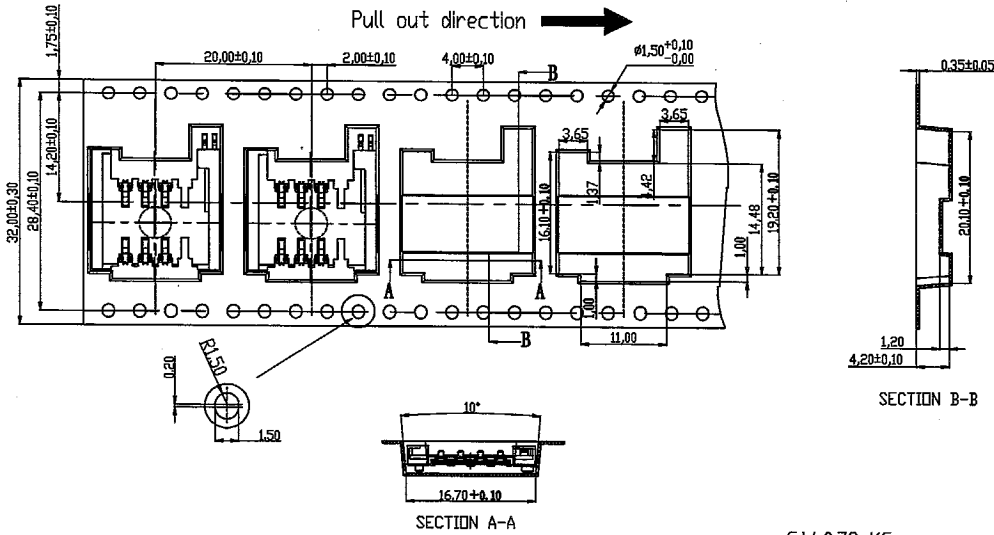

5.1.2 Reel Form Diagram

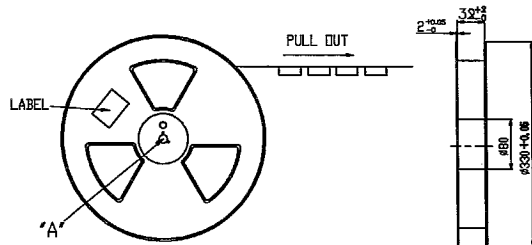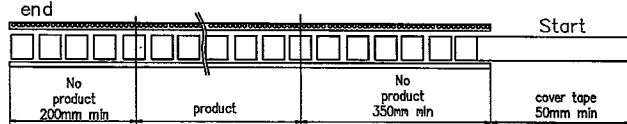

REV	MODIFICATION	DATE	DRAW
L	EN-12-1006	2012/10/16	Tony
M	EN-13-0519	2013/05/28	EvanTeng
N	ECN2-00000400	2016.05.24	Moya

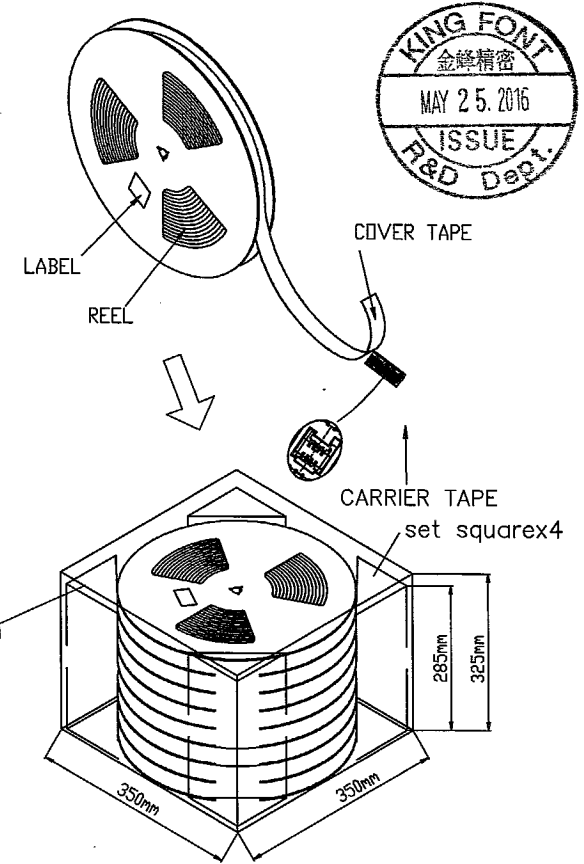

G.W.:0.78 KG
Q'ty:800 pcs/Reel




N.W.:6.20 KG
G.W.:8.00 KG
Q'ty : 6400 pcs per Carton (8 Reel set in order)
Meas : 35.00LX35.00WX31.50H cm

DIMENSION IN mm [Inch]		PROD. SPEC.	KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE SIM CARD CONN. CUSTOMER DRAWING	
.X±0.25	X.*± 2'	APPROVE <i>Cam</i>	FILE NO.	DWG NO. SIMMP-006xxBx0x-G
.XX±0.15	.X.*± 1'	CHECK <i>[Signature]</i>	SIZE A4	PROJ. SHEET 2 / 2
.XXX±0.10	.XX.*±	DRAW <i>[Signature]</i>	SCALE 2.5:1	REV N

1 2 3 4 5 6 7 8

REV	MODIFICATION	DATE	DRAW
L	EN-12-1006	2012/10/16	Tony
M	EN-13-0519	2013/05/28	EvanTeng
N	ECN2-00000400	2016.05.24	Moya

Notes:
 Material: Phosphor Bronze(C5191-H)
 SIMM Card Connector
 Type 1,8 Pin
 Physical:
 Housing: LCP UL 94V-0
 Contact: Selective Gold Flash
 Specifications:
 Voltage Current rating: 1A, 50V AC
 Insulation Resistance: 1000Mohm Min
 Contact Withstanding Voltage:
 AC 500V For 1 Minute
 Temperature Rating: -40° To +85°

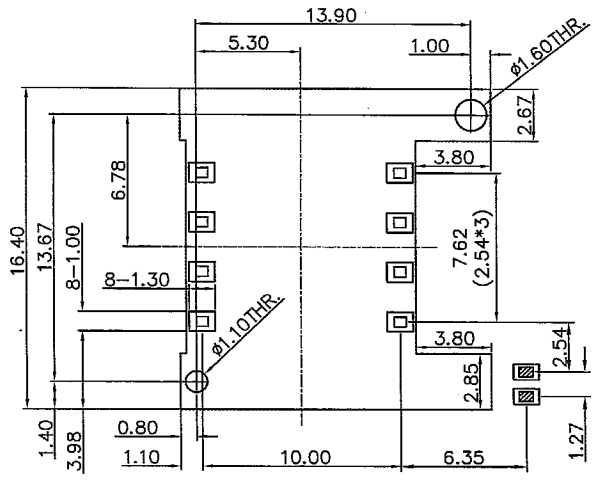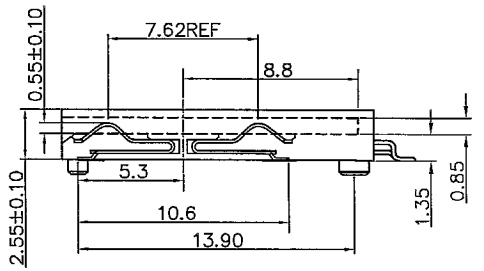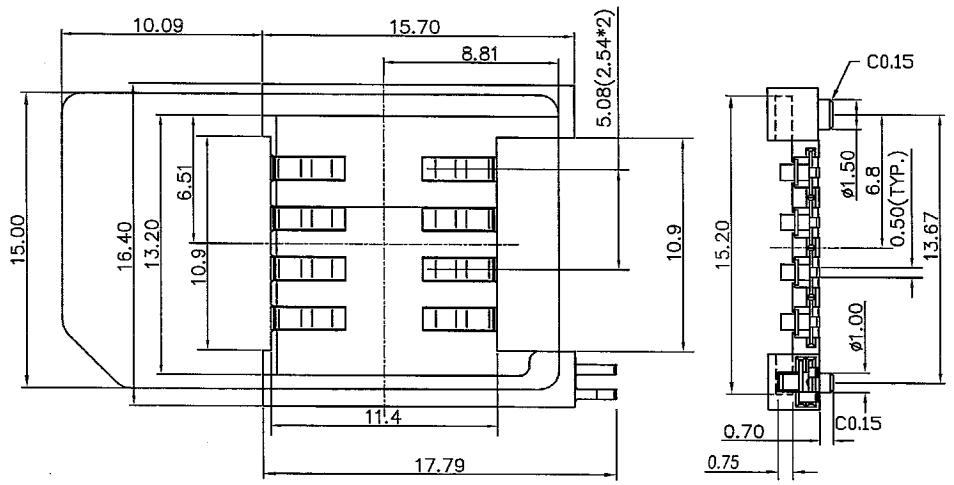

P.C.B. LAYOUT (TOLERANCES:±0.10mm)



ORDER INFORMATION

SIMMP-008 XX B X 0X-G

COMPLY TO RoHS

0 TUBE
1 TAPE REEL

0 WITH POST
1 WITHOUT POST


PLATING
01:GOLD FLASH
15:15u" GOLD PLATING

DIMENSION IN mm [Inch]		PROD. SPEC.	KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE SIM CARD CONN. CUSTOMER DRAWING	
.X± 0.25	X.*± 2'	APPROVE <i>Gmy</i>	FILE NO.	DWG NO. SIMMP-008xxBx0x-G
.XX± 0.15	.X.*± 1'	CHECK <i>[Signature]</i>	SIZE A4	PROJ. SHEET 1 / 2
.XXX± 0.10	.XX.*±	DRAW <i>[Signature]</i>	SCALE 2.5:1	REV N



1 2 3 4 5 6 7 8 QR-2100-043

PACKING INFORMATION


Tape carrier packing information
Carrier Dimensions Diagram

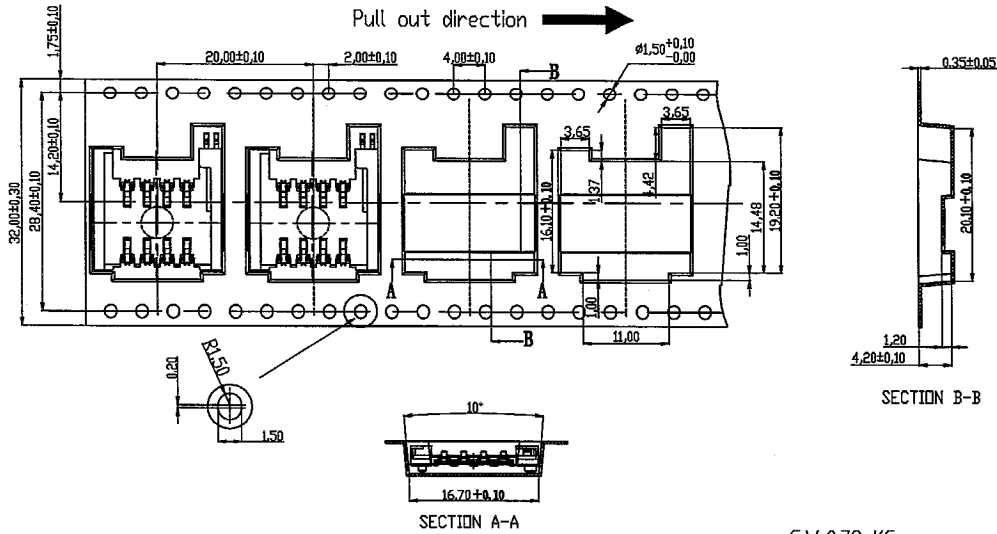

5.1.2 Reel Form Diagram

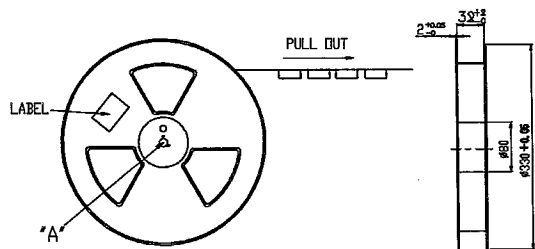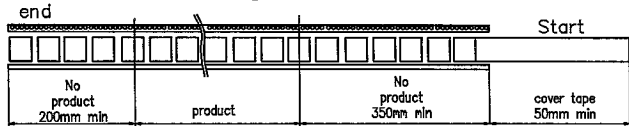

REV	MODIFICATION	DATE	DRAW
L	EN-12-1006	2012/10/16	Tony
M	EN-13-0519	2013/05/28	EvanTeng
N	ECN2-00000400	2016.05.24	Moya

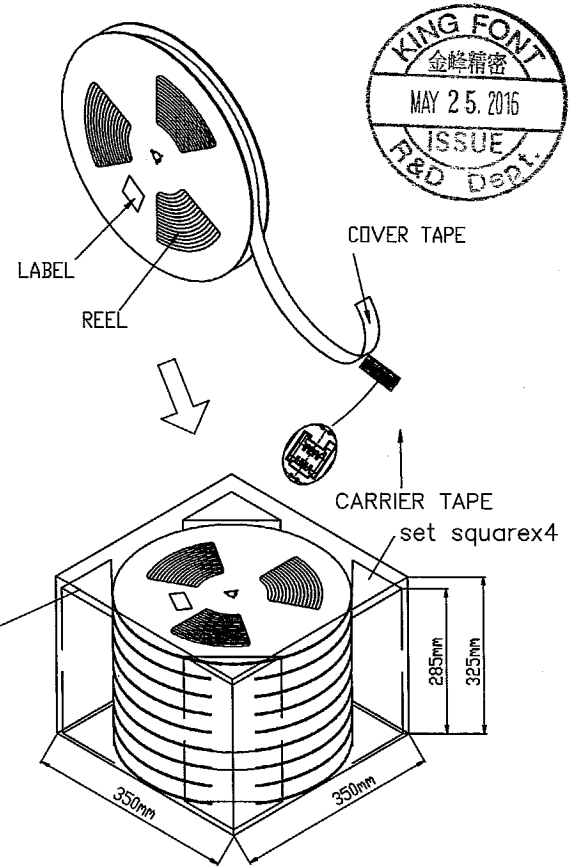

G.W.:0.78 KG
Q'ty:800 pcs/Reel

N.W.:6.20 KG
G.W.:8.00 KG
Q'ty : 6400 pcs per Carton (8 Reel set in order)
Meas : 35.00LX35.00WX31.50H cm

DIMENSION IN mm [Inch]		PROD. SPEC.	KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE SIM CARD CONN. CUSTOMER DRAWING	
.X±0.25	X.*±2'	APPROVE <i>Gmy</i>	FILE NO.	DWG NO. SIMMP-008xxBx0x-G
.XX±0.15	.X*±1'	CHECK <i>Moya</i>	SIZE A4	PROJ. SHEET 2 / 2
.XXX±0.10	.XX*±	DRAW <i>Moya</i>	SCALE 2.5:1	REV N