

PS-65 CW



Cely PS
SERIES



LCD
SEGMENT
DISPLAY



RECHARGEABLE
INTERNAL
BATTERY



Main characteristics

- Weight only scale without printer, with checkweigher function: the display changes its colour (orange-green-red) and alarm.
- Internal rechargeable battery:
 - Up to 60 hours' runtime with battery at full charge and backlight off (approximate data).

Features

- Weight control.
- Weighing unit conversion (kg / g / lb / tl).
- Fix tare.
- Manual zero.

- Energy saving via programmable on and off back lighting switching and automatic disconnection.
- Operating temperature: 0°C to + 40°C.

Capacity / Accuracy

- Monorange (15,000 divisions):
 - 3 kg / 0.2 g.
 - 6 kg / 0.5 g.
 - 15 kg / 1 g.
 - 30 kg / 2 g.

Available formats

- Flat.


Construction

- Structure:
 - ABS plastic casing.
- Display:
 - Backlit LCD segment display (3 colours).
 - 5 digits (H25 mm).
- Keypad with 2 keys under membrane.
- Stainless steel plate.

Power supply

- Mains: AC 12 V / 500 mA adapter.
- Internal rechargeable battery Pb 6 V / 3.2 Ah.

DIMENSIONS

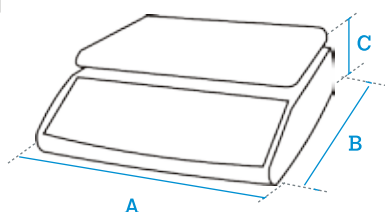

DATA IN mm

A	288
B	313
C	109

Dimensions of the plate: L263 x W204 mm.

Packaging measures: L345 x W370 x H195 mm.
Packaging weight: 4.1 kg.

MODELS:

PS-65 CW / 3

RANGE 3 kg / 0.2 g (Monorange)

Ref.: 71A0PS650032UE

PS-65 CW / 6

RANGE 6 kg / 0.5 g (Monorange)

Ref.: 71A0PS650033UE

PS-65 CW / 15

RANGE 15 kg / 1 g (Monorange)

Ref.: 71A0PS650034UE

PS-65 CW / 30

RANGE 30 kg / 2 g (Monorange)

Ref.: 71A0PS650035UE

Note:
- The references correspond to standard models: black ABS plastic casing, backlit LCD segment display and flat stainless steel plate. Capacity: monorange, from 3 kg to 30 kg.