


REV	MODIFICATION	DATE	DRAW
B	EN-10-1002	99.10.04	SAN

PIN	A	B	C	PIN	A	B	C
2	1.25	4.15	6.25	11	12.50	15.40	17.50
3	2.50	5.40	7.50	12	13.75	16.65	18.75
4	3.75	6.65	8.75	13	15.00	17.90	20.00
5	5.00	7.90	10.00	14	16.25	19.15	21.25
6	6.25	9.15	11.25	15	17.50	20.40	22.50
7	7.50	10.40	12.50				
8	8.75	11.65	13.75				
9	10.00	12.90	15.00				
10	11.25	14.15	16.25				

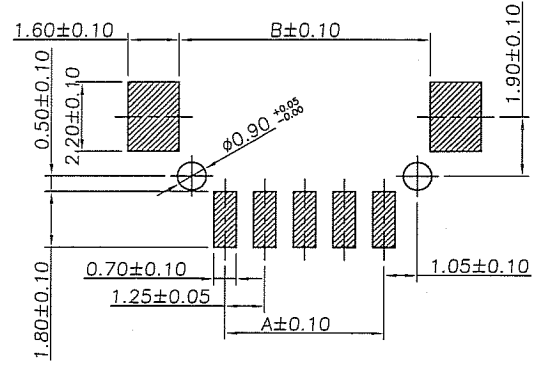

SPECIFICATION
 CURRENT RATING:1A AC,DC
 VOLTAGE RATING:100V AC,DC
 TEMPERATURE RANGE:-25°C~+85°C
 CONTACT RESISTANCE:20mΩ MAX
 INSULATION RESISTANCE:500MΩ MIN
 WITHSTANDING VOLTAGE:500V AC/MINUTE
 PIN MATERIAL:BRASS/TIN-PLATED
 SOLDER TABS:PHOSPHOR BRONZE/TIN-PLATED
 MATERIAL:NYLON 6T,UL94V-0
 COLOR:NATURAL(BEIGE)

ORDERING INFORMATION
 MPHTG-1 XX TT A10 X
 NO OF PIN _____ O:T&R
 PLATING: 1:TUBE
 TT:LEAD FREE

DIMENSION IN mm [Inch]		PROD. SPEC.	C KINGFONT KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE	CUSTOMER DRAWING
.X±0.25	X'± 1'	APPROVE <i>Germ</i>	1.25mm PITCH	90'SINGLE ROW WAFER-SMT
.XX±0.15	.X'± 0.5'	CHECK <i>Tomy</i>	FILE NO.	DWG NO. MPHTG-1XXTTA10X
.XXX±0.05	.XX'± 0.25'	DRAW <i>San</i>	SIZE A4	PROJ. SHEET 1 / 1
			SCALE 5:1	REV B