

Pin Type	Interface Dim L	Pin Type	REV	MODIFICATION	DATE	DRAW
Detect	3.5 mm	25,26	J	EN-11-0512	2011/05/13	Stacy
General	4.25 mm	All Other Pins	K	EN-12-0612	2012/06/13	Stacy
Power	5.0 mm	1,13,38,50	L	ECN2-00000732	2019.12.17	Moya






DIMENSION IN mm [Inch]		PROD. SPEC. SP0028	KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PPP-CFC-006	CF CARD CONN. TYPE1,2 TITLE STAND-OFF 2.0mm NORMAL TYPE	CUSTOMER DRAWING
.X±0.30	X.*± 1'	APPROVE <i>Gany</i>	FILE NO. KFP-028	DWG NO. CFCMD-45TxxW101
.XX±0.20	.X.*± 0.5'	CHECK <i>Moya</i>	SIZE A4	PROJ.  SHEET 1 / 2
.XXX±0.10	.XX.*± 0.25'	DRAW <i>Moya</i>	SCALE 1:1	REV L

1 2 3 4 5 6 7 8

REV	MODIFICATION	DATE	DRAW
J	EN-11-0512	2011/05/13	Stacy
K	EN-12-0612	2012/06/13	Stacy
L	ECN2-00000732	2019.12.17	Moya

F  
E  
D  
C  
B  
A

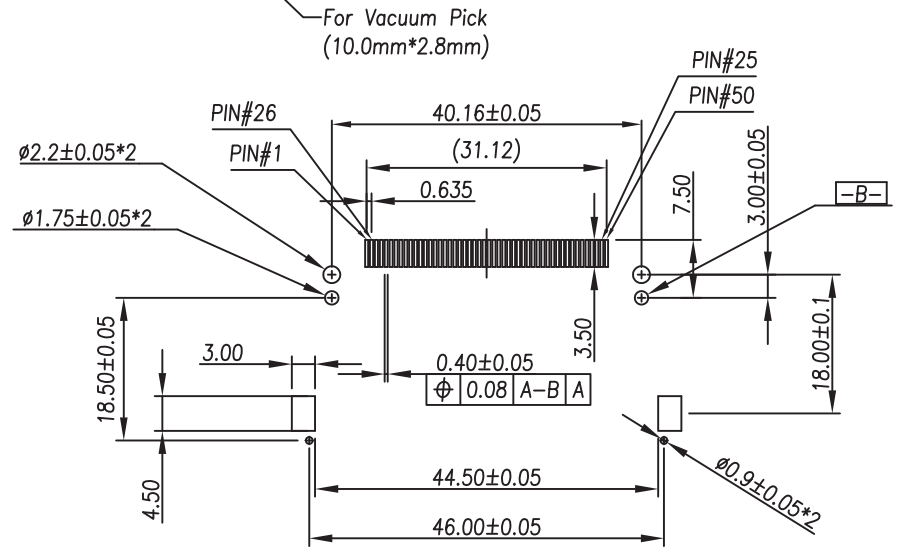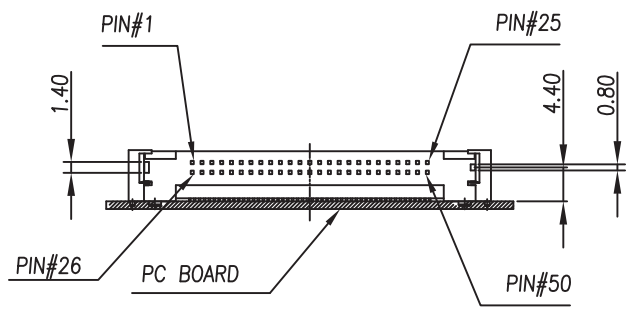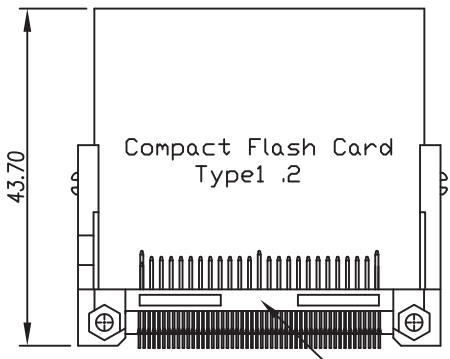

P.C.B Layout

Ordering Information:

CFC M D -4 5 T XX W 1 0 1

TYPE 2

Pin No. 50 Position

Color: W--White.

DIM-A 1-40.16

0-NORMAL TYPE

1 : STANDOFF 2.0mm

T : COMPLY TO SONY SS-00259

Contact Area Plating:

01-- Gold Flash Plating.

15--15U" Gold Plating.

30--30U" Gold Plating.

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0

CONTACT : Copper Alloys

VOLTAGE RATING : 100VAC

CURRENT RATING : 0.5A

CONTACT RESISTANCE: 40 mΩ max.

INSULATION RESISTANCE: 1000M Ω max.

DIELECTRIC STRENGTH : 500VAC/1min

OPERATION TEMPERATURE : -40°C~85°C



DIMENSION IN mm [Inch]		PROD. SPEC. SP0028	KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PPP-CFC-006	CF CARD CONN. TYPE1,2	CUSTOMER DRAWING
.X $\pm$ 0.30	X.* $\pm$ 1'	APPROVE <i>Gm</i>	STAND-OFF 2.0mm NORMAL TYPE	
.XX $\pm$ 0.20	.X.* $\pm$ 0.5'	CHECK <i>Moya</i>	FILE NO. KFP-028	DWG NO. CFCMD-45TxxW101
.XXX $\pm$ 0.10	.XX.* $\pm$ 0.25'	DRAW <i>Moya</i>	SIZE A4	PROJ. SHEET 2 / 2
			SCALE 1:1	REV L

1 2 3 4 5 6 7 8 QR-2100-043