

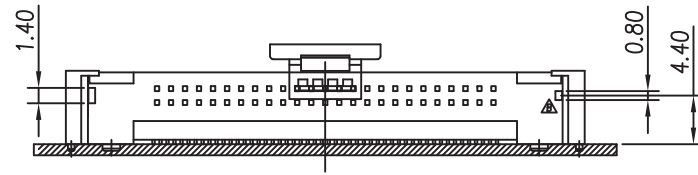


1 2 3 4 5 6 7 8

REV	MODIFICATION	DATE	DRAW

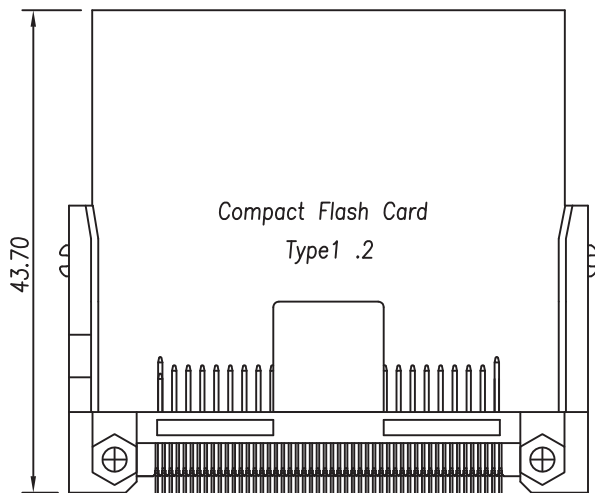

CARD INSERTION

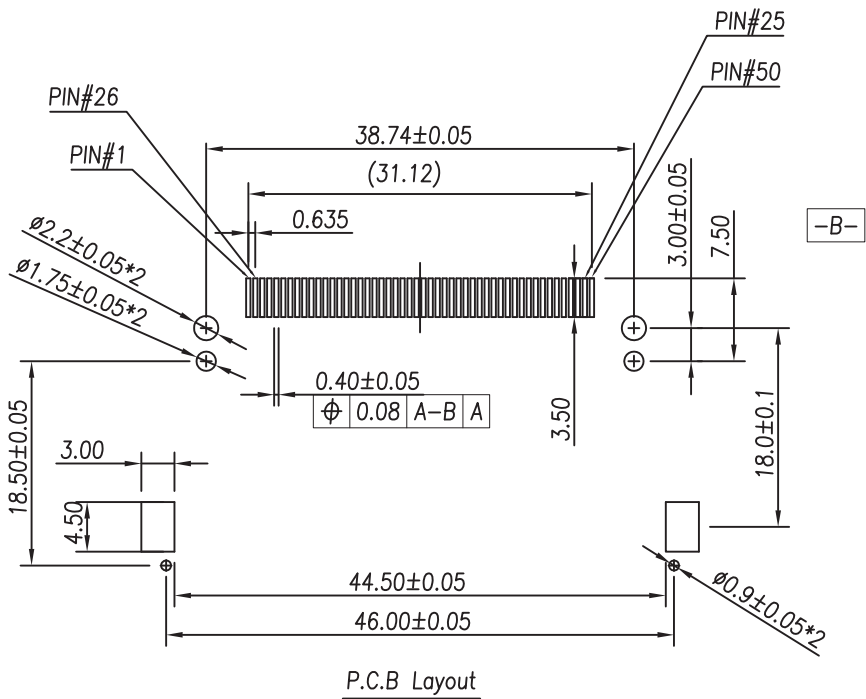

SPECIFICATIONS:

- HOUSING : High Temperature Plastic, UL 94V-0
- CONTACT : Copper Alloys
- VOLTAGE RATING : 100VAC
- CURRENT RATING : 0.5A
- CONTACT RESISTANCE:40m Ωmax.
- INSULATION RESISTANCE:1000M Ω max.
- DIELECTRIC STRENGTH : 500VAC/1min
- OPERATION TEMPERATURE : -40°C~85°C



Ordering Information:
CFC M D -45Txx W 1 0 0-DC

Contact Area Plating: 15:15U" Gold Plating.

Color: W:White

D: 左右兩上方型(切齊)+CAP,T/R

DIM-A 0-38.74

0-NORMAL TYPE

1:STANDOFF 2.0mm

DIMENSION IN mm [Inch]		PROD. SPEC. SP0028	KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PPP-CFC-006	TITLE CF CARD CONN. TYPE1,2 STAND-OFF 2.0mm NORMAL TYPE	CUSTOMER DRAWING
.X±0.30	X.*± 1'	APPROVE <i>Gary</i>	FILE NO. KFP-028	DWG NO. CFCMD-45TxxW100-DC
.XX±0.20	.X.*± 0.5'	CHECK <i>Ming</i>	SIZE A4	PROJ. SHEET 2 / 2
.XXX±0.10	.XX.*± 0.25'	DRAW <i>Ming</i>	SCALE 1:1	REV A

1 2 3 4 5 6 7 8 QR-2100-043