

Measurement accuracy <sup>1)</sup>	± 0.5 % FS at 22 °C
Temp.-dependent drift	± 0.04 %/°C FS
Temp.-dependent drift	± 0.04 %/°C FS (for gradual changes in temperature)
Overload capacity	10 x for measurement ranges ≤ 20 kPa 2 x for measurement ranges 200 kPa
Calculation of air speed (in m/s)	$v = \text{pitot factor} \cdot \sqrt{(2 \cdot \Delta p) / \text{air density}}$ pitot factor and density adjustable, $\Delta p$ = differential pressure at the pitot tube [Pa] with telescoping pitot tube, see p. 4
Zero-point correction	performed electronically by pressing zero-point key
Medium	air, all non-aggressive gases
Analog output	0..2 V ( $R_L \geq 2 \text{ k}\Omega$ )
Display	3 1/2 digit LCD, character height = 10 mm
Time constant (damping) (adjustable)	1..10 s
Operating temperature	0..50 °C
Storage temperature	-10..70 °C
Power supply	9V battery (service life approx. 100 h) (display reads "low bat" when power falls below a certain mini- mum level); Switches off automatically after approx. 20 min.
Weight	approx. 0.4 kg
Pressure ports	for tubing NW 4 or 6 mm
Certificates	CE/UKCA

<sup>1)</sup> Measurement accuracy of reference 0.3 Pa, precision of reference 0.12 Pa, for measuring ranges ≤ ±2 kPa

Measurement range			A
± 200 Pa	(± 2 mbar)	1.5.. 18 m/s	0
± 2 kPa	(± 20 mbar)	5.. 58 m/s	1
± 20 kPa	(± 200 mbar)	15.. 180 m/s	10
± 200 kPa	(± 2 000 mbar)		100


Calibration certificate		B
none		0
Factory calibration		W
Calibration according to DKD-R 6-1		D

Order code	A	B
EMA 200	-	-




## Features

- High-end pressure gauge for differential pressure and flow measurements
- Adjustable pitot factor and density
- Zero-point correction at the push of a button
- Min./max. value memory
- Temperature measurement
- Time constant (damping) adjustable for measuring of strongly fluctuating input pressures

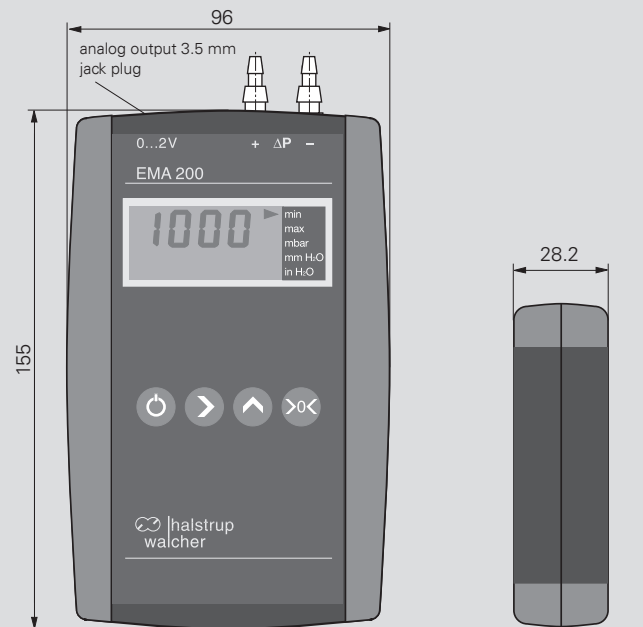

All dimensions in mm

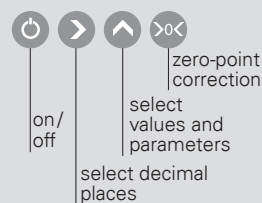

## Connection diagram

