
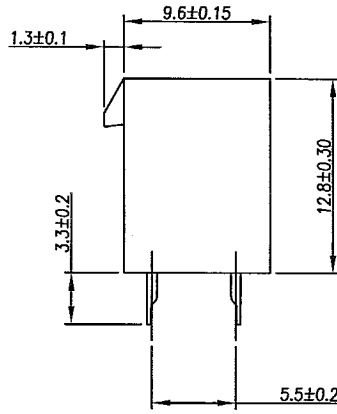


DIM:A,B TOLERANCE AS FOLLOWINGS
 2x1P~2x4P±0.20
 2x5P~2x8P±0.30
 2x9P~2x12P±0.40

REV	MODIFICATION	DATE	DRAW
G	EN-09-0704	98.07.03	SAN
H	EN-09-1019	98.10.21	SAN
I	ECN2-00000702	2019.09.03	Moya

Part No.	Dimension		Part No.	Dimension	
	A	B		A	B
02	5.6		14	30.8	25.20
04	9.8	4.20	16	35.0	29.40
06	14.0	8.40	18	39.2	33.60
08	18.2	12.60	20	43.4	37.80
10	22.4	16.80	22	47.6	42.00
12	26.6	21.00	24	51.8	46.20

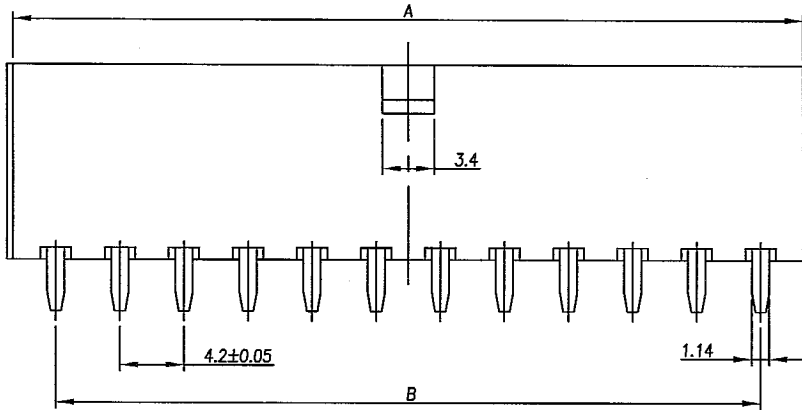


NOTES:
 VOLTAGE: 600V
 TEMPERATURE: -40°C TO 105°C.
 HOUSING: Nylon 66
 CONTACT: Brass
 CONTACT PLATING: LEAD FREE
 CONTACT RESISTANCE: 10mΩ max.
 DIELECTRIC VOLTAGE: 1500V
 INSULATION RESISTANCE: 1000 MΩ min.
 BURR:0.05mm MAX.
 MAXIMUM CURRENT RATING(AMPERES)



Wire Size	Dual Row Circuit Sizes					
	2	4	6,8	10,12	14,16,18	20,22,24
16 AWG	12.5A	11.5A	10A	9A	8.5A	8.0A
18 AWG	10.5A	9.5A	8.5A	8A	7.5A	7A
20 AWG	9A	8A	7A	6.5A	6A	5.5A

PART NO. MIFSM-2 XX TT W041
 NO. OF CONTACT (02~24)
 PLATING TT:COMPLY TO RoHS

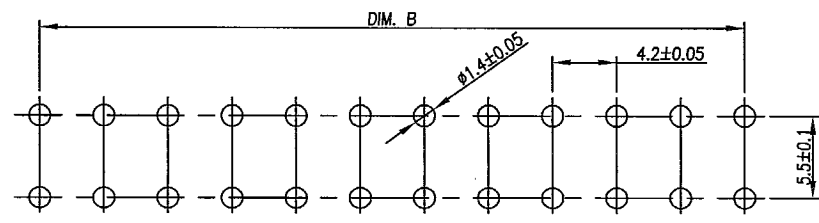

P.C.B LAYOUT

DIMENSION IN mm [Inch]	PROD. SPEC.	C KINGFONT KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED	PKG. SPEC.	TITLE 5015 SERIES 無柱無水孔 CUSTOMER DRAWING	
.X±0.25 X.*± 1°	APPROVE <i>Gummy</i>	FILE NO. KFP-041	DWG NO. MIFSM-2XXTTW041
.XX±0.20 .X.*± 0.5°	CHECK <i>Moya</i>	SIZE A4	PROJ. SHEET 1 / 1
.XXX±0.08 .XX.*± 0.25°	DRAW <i>Moya</i>	SCALE 2:1	REV I