



Pin Type	Interface Dim L	Pin Type	REV	MODIFICATION	DATE	DRAW
Detect	3.5 mm	25,26	B	EN-10-0217	2010/02/12	TONY
General	4.25 mm	All Other Pins				
Power	5.0 mm	1,13,38,50				

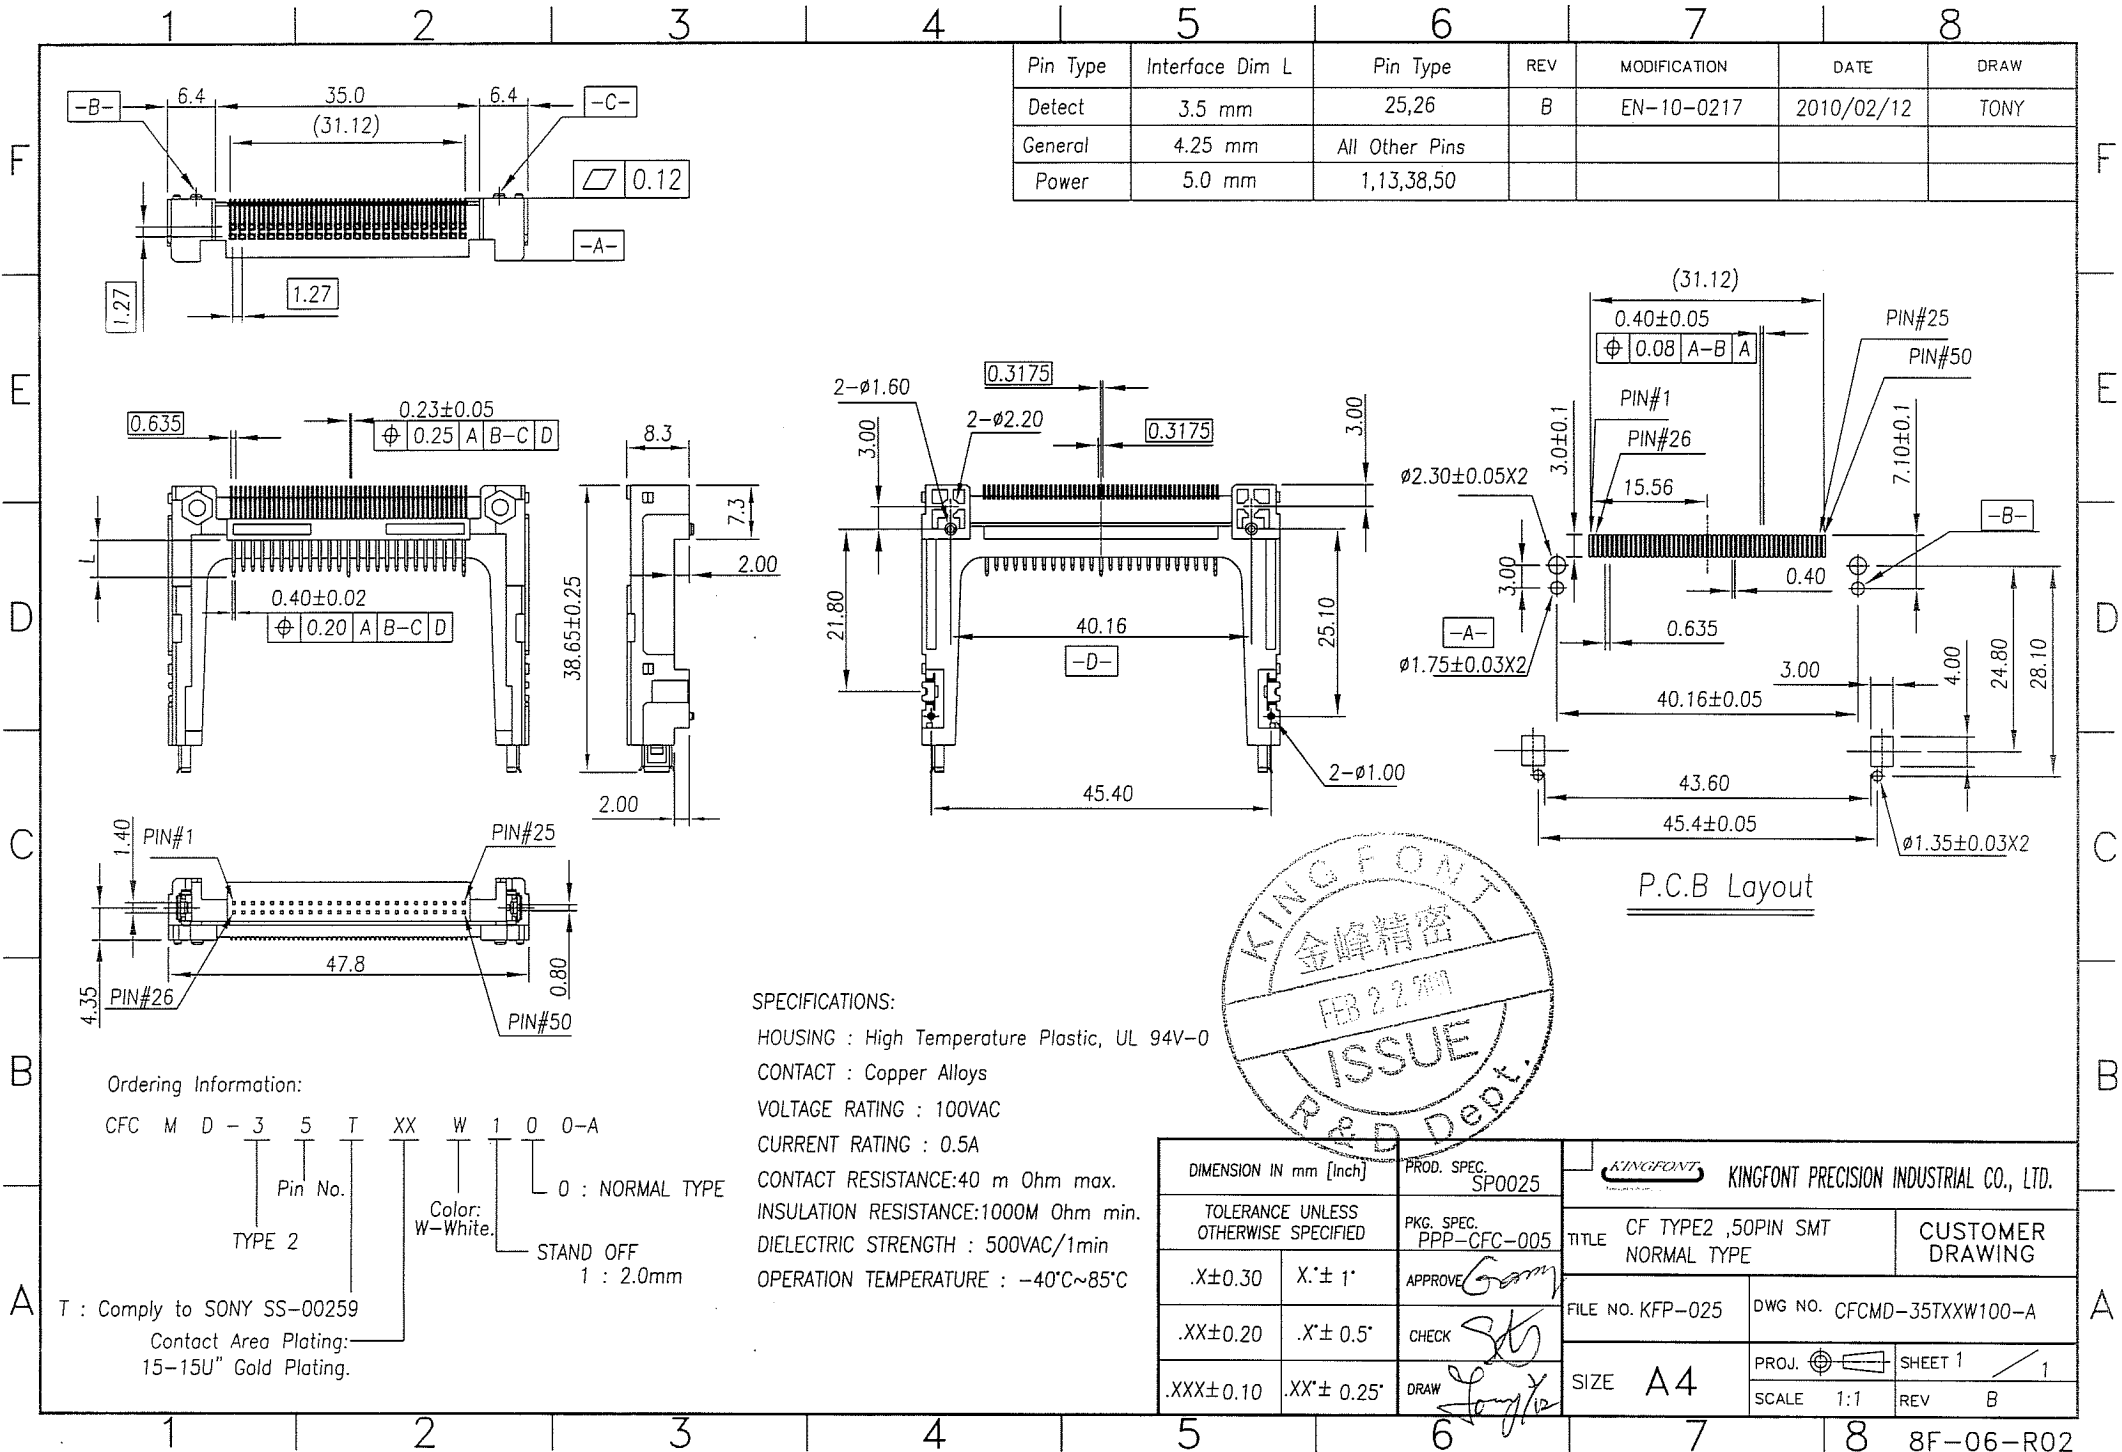

**SPECIFICATIONS:**  
 HOUSING : High Temperature Plastic, UL 94V-0  
 CONTACT : Copper Alloys  
 VOLTAGE RATING : 100VAC  
 CURRENT RATING : 0.5A  
 CONTACT RESISTANCE:40 m Ohm max.  
 INSULATION RESISTANCE:1000M Ohm min.  
 DIELECTRIC STRENGTH : 500VAC/1min  
 OPERATION TEMPERATURE : -40°C~85°C

**Ordering Information:**  
 CFC M D - 3 5 T XX W 1 0 0-A  
 Pin No. TYPE 2  
 Color: W-White.  
 STAND OFF 1 : 2.0mm  
 O : NORMAL TYPE  
 T : Comply to SONY SS-00259  
 Contact Area Plating: 15-15U" Gold Plating.

DIMENSION IN mm [Inch]		PROD. SPEC. SP0025	KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PPP-CFC-005	TITLE CF TYPE2 ,50PIN SMT NORMAL TYPE	CUSTOMER DRAWING
.X±0.30	X'± 1"	APPROVE <i>Gerry</i>	FILE NO. KFP-025	DWG NO. CFCMD-35TXXW100-A
.XX±0.20	.X'± 0.5"	CHECK <i>Sto</i>	PROJ.	SHEET 1 / 1
.XXX±0.10	.XX'± 0.25"	DRAW <i>Long</i>	SCALE 1:1	REV B