

# Kabelverschraubungen / Cable Glands

we **ge**® S Standard UD



<b>Material</b>	Edelstahl 1.4305
<b>Dichteinsatz</b>	TPE
<b>O-Ring</b>	NBR-Oz
<b>Schutzklasse</b>	IP66/ IP68 - 5 bar
<b>Zugentlastung</b>	DIN EN 62444 Tab. 2A
<b>Temperaturbereich</b>	-40 °C bis +100 °C


<b>material</b>	stainless steel AISI 303
<b>sealing insert</b>	TPE
<b>o-ring</b>	NBR-Oz
<b>protection class</b>	IP66/ IP68 - 5 bar
<b>strain relief</b>	DIN EN 62444 Tab. 2A
<b>range of temperature</b>	-40 °C to +100 °C



Gewinde thread			H	L		Bestell-Nr. ref.-number
-------------------	--	--	---	---	--	----------------------------

## Zweiteiliger Dichteinsatz / two-piece sealing insert

kurzes Anschlussgewinde / short connection thread							
M 16 x 1,5	5	- 10	17	22	5,5	50	387.1600.0
M 20 x 1,5	8	- 14	22	24	6	50	387.2000.0
M 25 x 1,5	12	- 19	30	28	7	25	387.2500.0
M 32 x 1,5	15	- 22	34	30	8	25	387.3200.0
M 40 x 1,5	22	- 28	44	35	8	10	387.4000.0
M 50 x 1,5	28	- 36	54	43	9	5	387.5000.0
M 63 x 1,5	34	- 49	66	48	10	5	387.6300.0

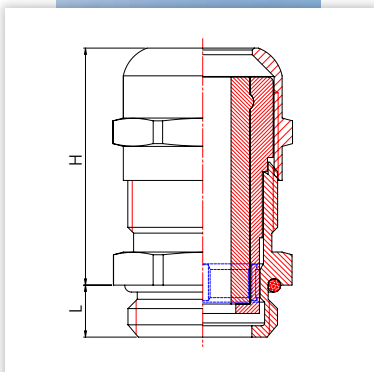

## Einteiliger Dichteinsatz / one-piece sealing insert

kurzes Anschlussgewinde / short connection thread							
M 12 x 1,5	5	- 7	14	20	5	50	387.1200.1
M 16 x 1,5	8	- 10	17	22	5,5	50	387.1600.1
M 20 x 1,5	11	- 14	22	24	6	50	387.2000.1
M 25 x 1,5	15	- 19	30	28	7	25	387.2500.1
M 32 x 1,5	19	- 22	34	30	8	25	387.3200.1
M 40 x 1,5	25	- 28	44	35	8	10	387.4000.1
M 50 x 1,5	32	- 36	54	43	9	5	387.5000.1
M 63 x 1,5	43	- 49	66	48	10	5	387.6300.1

