




### Specification

Model	Unit	PT-051
Power input		1 Phase, 100~240 VAC, 50/60Hz
Capacity	kg	50 / 30 (Horizontal / Vertical)
Rated eccentricity	mm	30
Table dimension (E)	mm	Ø 200
Rotation speed	rpm	0.5 ~ 8
Spindle thru hole	mm	Ø 14
Earthing	Amp	200 @ 100%
Tilt range	deg.	0 ~ 90
Overall length (A)	mm	320
Overall width (B)	mm	240
Overall height (C)	mm	265
Center to floor (D)	mm	205
Weight	kg	10

### Dimension

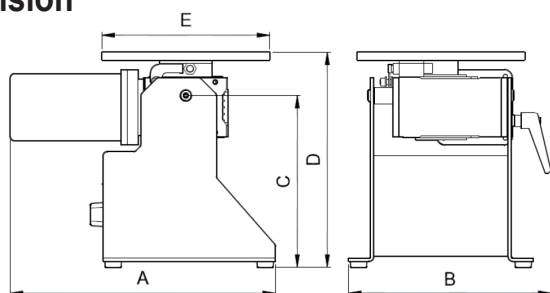

## PT-051 Benchtop Positioner

PT-051 benchtop welding positioner offers best performance in its class. Compact and sturdy design, friendly operation interface, and professional welding quality guaranteed.

### Features

- High frequency interference tested
- Suitable for different welding application
- Through hole for pipe welding or shield gas
- CE conformity

### Standard accessories




- Emergency stop
- Forward / Reverse switch
- Speed adjustment knob
- Non latch foot control
- Power cord & Adapter

### Optional 3-Jaws chuck

- PG-095L OD: 3 ~ 95 mm
- PG-050L OD: 1 ~ 50 mm



PG-095L



PG-050L Mounts on shaft in replace of table plate

