




# Main catalogue


## Floor marking & labelling

---



# SYMBOL KEY

 outdoor use	 pedestrian suitable	 slip resistance	 individual text
 indoor use	 lift truck suitable	 slip class R9	 barcode
 5S suitable	 forklift suitable	 slip class R10	 writeable
 for smooth surfaces	 suitable for wet areas	 slip class R11	 roll material
 for structured surfaces	 magnetic	 slip class R12	 bundled
 for very structured surfaces	 suitable for freezing	 slip class R13	 sheet material

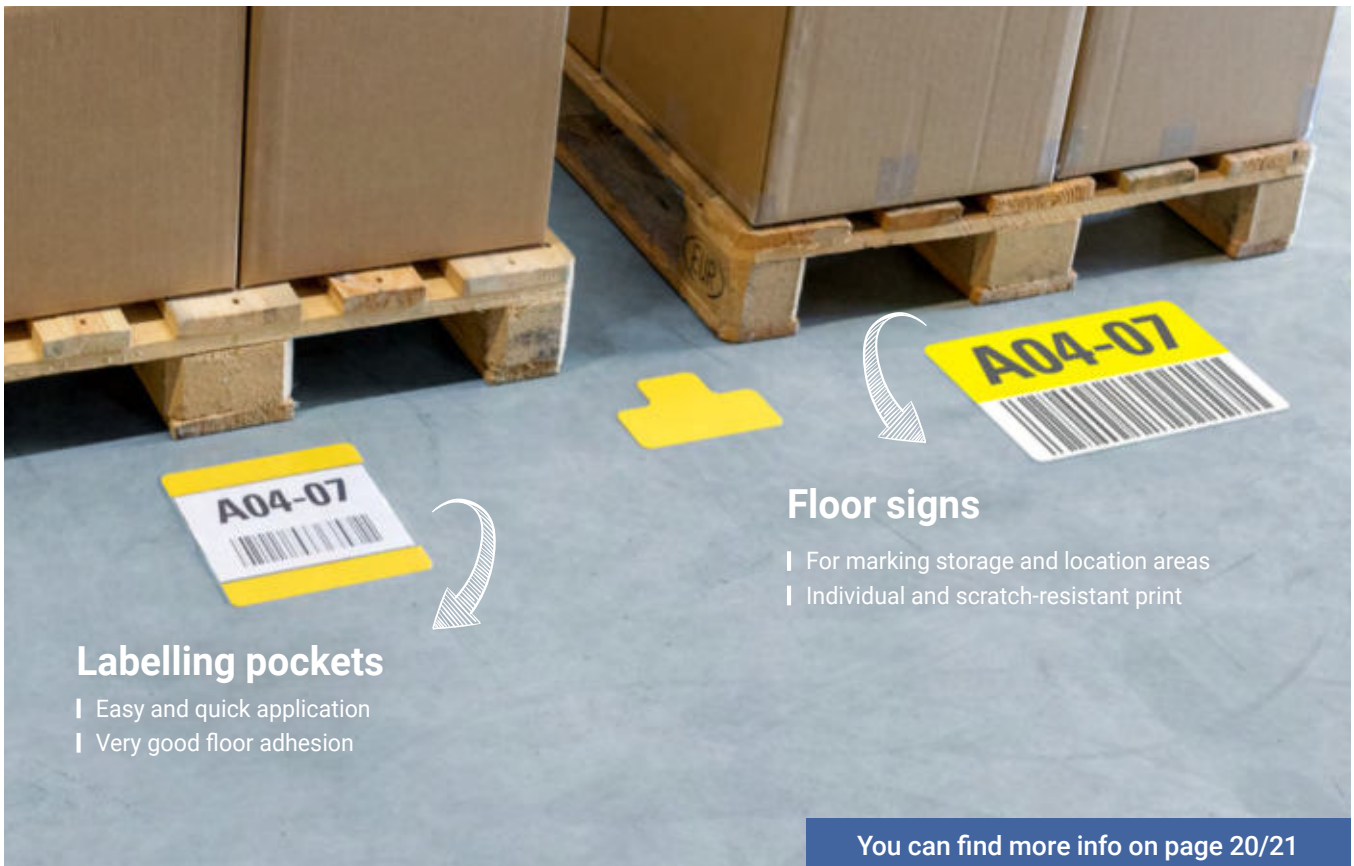

## Labelling pockets

- | Easy and quick application
- | Very good floor adhesion

## Floor signs

- | For marking storage and location areas
- | Individual and scratch-resistant print

You can find more info on page 20/21

# CONTENTS

		Page
<b>Introduction</b>	Our services	4
	Product overview	6
	Floor marking tips	8
<b>Floor marking</b>	Floor marking	13
	Segmented floor marking	20
	Crosswalk	23
	Labelling pockets	24
	Floor marking signs	25
	Pictograms	25
	Storage location marker	26
	Optical and magnetic tracking	28
	Ground signs - Outdoor	30
	Safety signs - Ground	32
<b>Anti-slip solutions</b>	Anti-slip tapes	38
	Stair nosing profiles - Thin Line	40
	Stair nosing profiles - General Line	42
<b>Signs and marks</b>	Reflective marking	46
	Photoluminescent marking	48
	Escape signs	50
	Fire protection signs	52
	Prohibition signs	54
	Mandatory signs	56
	Warning signs	58
	Block storage, ceiling and flag signs	60
	Shelf lines and wall signs	62
	Ceiling hangers	64
	Labels	68
	Anti-Stick Label Holder	70
	Magnet and whiteboard solutions	72
	Magnet and adhesive pockets	74
	Spray stencils	76
	Accessories	78
	Clik-Clik	80
<b>Industrial tapes</b>	Cloth adhesive tapes	84
	Double-sided adhesive tapes	86
	Single sided adhesive tapes	88

A01-123  
Block storage signs  
S. 58


E08  
1-24  
Shelf & aisle signs  
S. 60

Cloth adhesive tapes  
S. 82

Labels  
S. 66

Escape signs  
S. 48

Photoluminescent marking  
S. 46

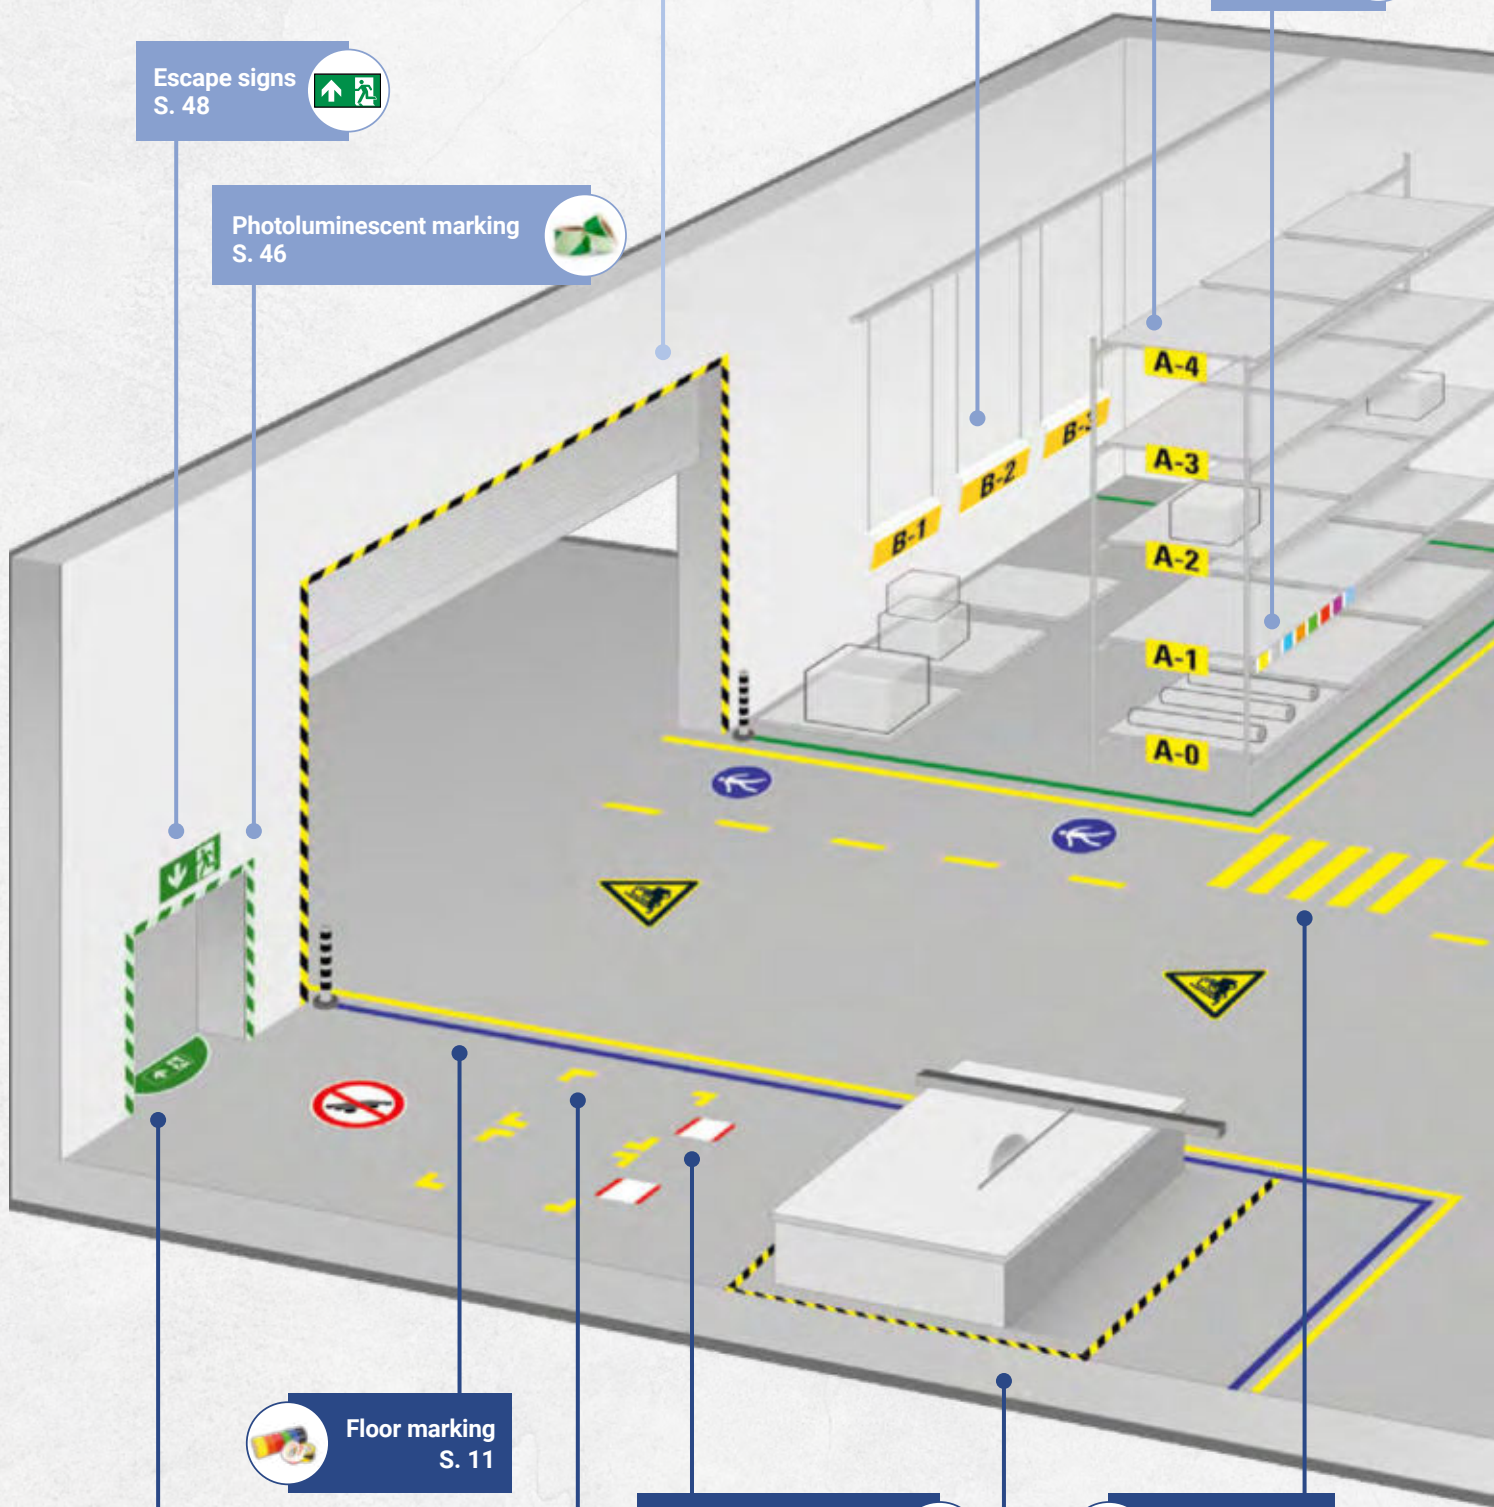

Floor marking  
S. 11


Labelling pockets  
S. 22

Zebra crossing  
S. 21

Signs for passageways  
S.32

Storage location marker  
S. 24

Warning marking  
S. 14

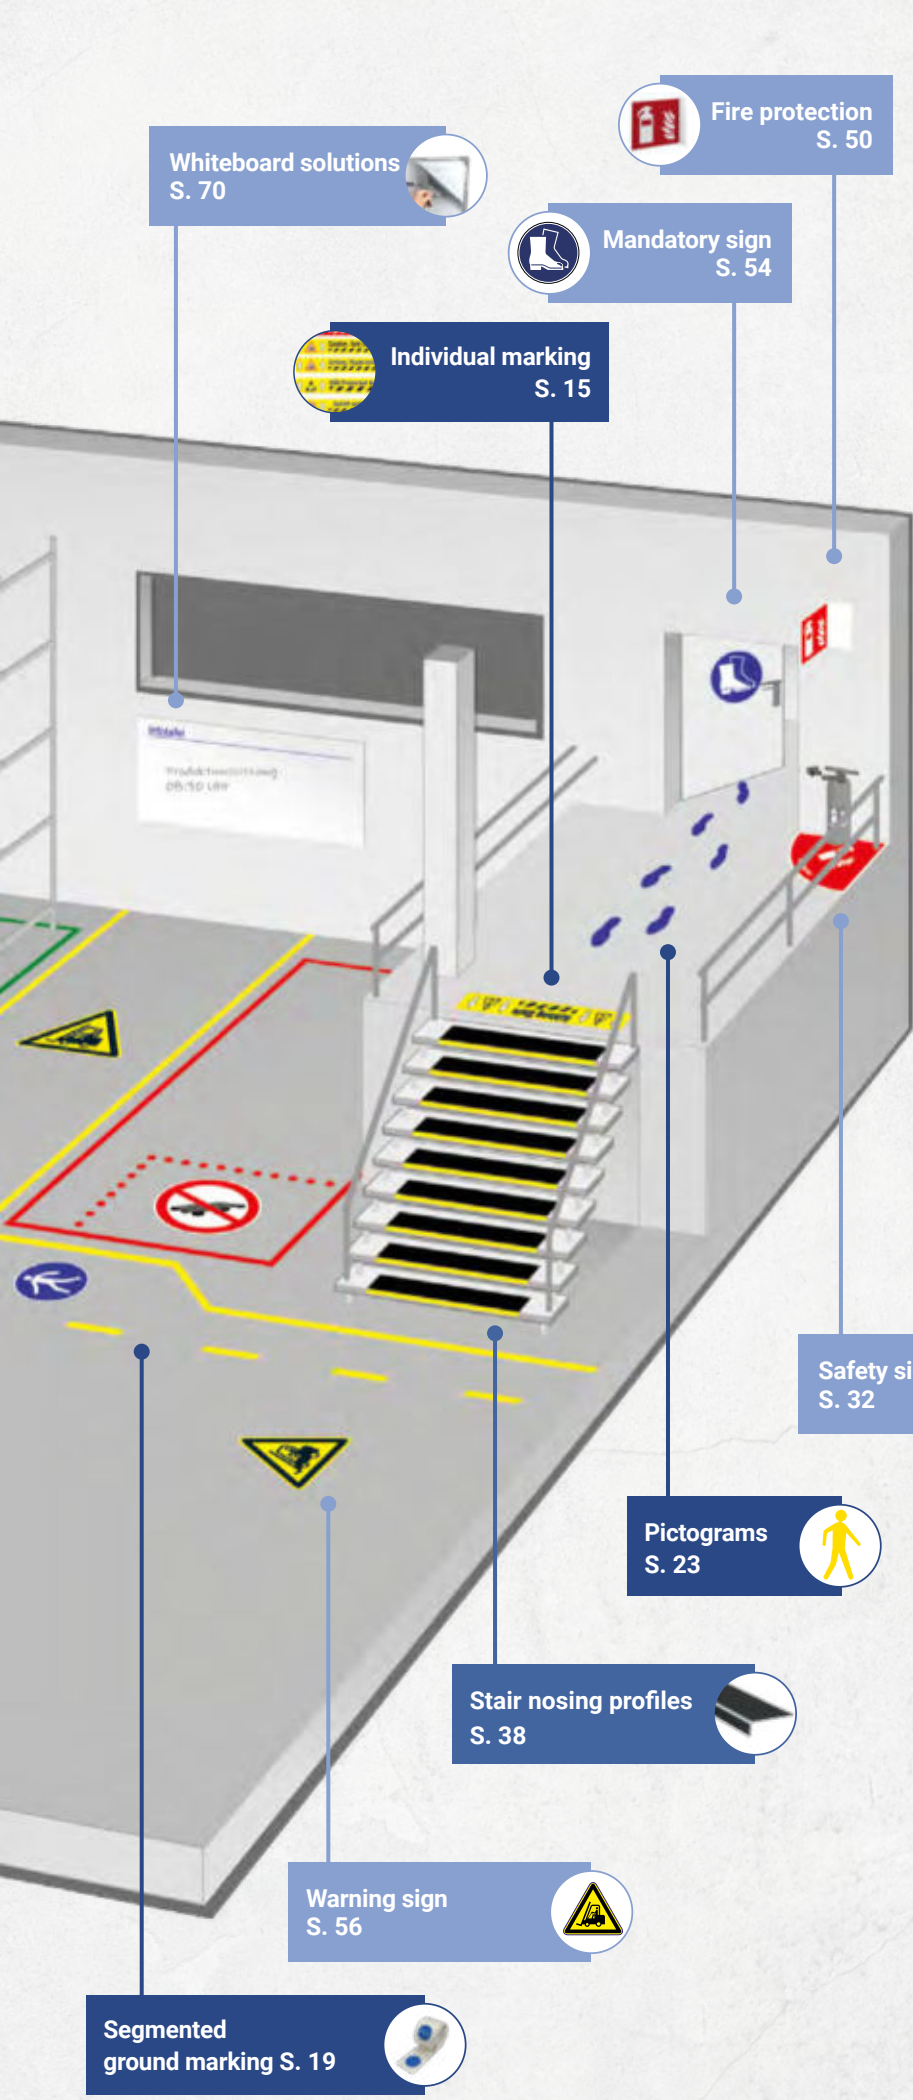

Whiteboard solutions  
S. 70

Fire protection  
S. 50

Mandatory sign  
S. 54

Individual marking  
S. 15

Safety sign  
S. 32

Pictograms  
S. 23

Stair nosing profiles  
S. 38

Warning sign  
S. 56

Segmented  
ground marking S. 19

FLOOR MARKING

ANTI-SLIP SOLUTIONS

SIGNS AND MARKS

INDUSTRIAL TAPES

INTRODUCTION

FLOOR MARKING

ANTI-SLIP SOLUTIONS

SIGNS AND MARKS

INDUSTRIAL TAPES

## Note on the selection and bonding of floor markings and floor signs

All self-adhesive markers, signs, etc. offered in the catalogue are items that are subject to wear depending on the stressing. You should be aware that there is no 100% forklift resistant self-adhesive floor marking. Before making a selection, consider the following points to find the product that is right for you:

### Where to mark?

indoor or outdoor

### What are the floor conditions?

e.g. plain concrete screed, asphalt or concrete pavement

### How can damage, to the marking due to heavy loading, be restricted?

e.g. with segmented floor marking, by marking without restricting their function or by applying to places that are not heavily loaded

### What stress is the material subjected to?

forklift, pallet truck, pedestrian traffic; low or heavy traffic

### Outdoor installation

primer is required for asphalt, concrete and other absorbent (large-pored) substrates

### Is slip resistance required?

slip resistance or slip class R9 - R13

### Installation instructions

dry, grease-free, dust-free and dirt-free subfloor with an installation temperature of >12°C



If the above-mentioned aspects are taken into account, all the advantages of self-adhesive products, such as immediate accessibility, individual marking possibilities, quick removability and the high contribution to 5S, can be realized.

If you have any questions, our sales team is always available to advise you.

## Ground marking - What do the different colours mean?

The different colours make surfaces and functions clearly visible. In many industrial companies, a largely consistent application has become established, which can serve as a good guide for your own use. We offer floor marking tapes in the following colours and meanings:







Colour	Example of application
yellow	aisles, paths and lanes, production cells
white	aisles, paths and lanes, production cells
orange	areas for material/production control or intermediate storage
red	safety/First Aid, Waste and Disposal Areas, Restricted Storage Area
green	materials and manufacturing, finished goods
blue	materials and manufacturing, raw materials
black	materials and manufacturing, work in progress
black/yellow	areas with potential health hazards where special care is required
black/white	areas in which the stay is not permitted for operational reasons



# Which floor marking tape for which application


The following table quickly shows you which marking tape is most suitable for your ground.

**The tapes given are recommendations, a test bond and sample is always advisable.**

Floor	Area	Degree of loading and surface quality of the ground marking tape				
		Pedestrian traffic		Lift truck traffic		Forklifts
		Standard	with slip resistance	Standard	with slip resistance	Standard
<b>Smooth concrete screed</b> 	Indoor	WT-5125 / P.14 WT-500 / P.11	WT-5420 / P.17 WT-5645 / P.12	WT-500 / P.11 WT-5125 / P.14	WT-5845 / P.12 WT-5645 / P.12	WT-6000 / P.11 WT-500 / P.11
	Outside		WT-5845 / P.12 WT-5645 / P.13		WT-5845 / P.12 WT-5645 / P.12	
<b>EP/ PU/ MMA coating</b> 	Indoor	WT-5229 / P.16 WT-5125 / P.14	WT-5420 / P.17 WT-5429 / P.16	WT-5229 / P.16 WT-5125 / P.14	WT-5420 / P.17 WT-5429 / P.16	WT-6000 / P.11 WT-500 / P.11
	Outside		WT-5845 / P.12 WT-5645 / P.13		WT-5845 / P.12 WT-5645 / P.13	
<b>EP-/PU-/MMA-anti slip</b> 	Indoor	WT-5645 / P.13 WT-5845 / P.12	WT-5645 / P.13 WT-5845 / P.12	WT-5645 / P.13 WT-5845 / P.12	WT-5645 / P.13 WT-5845 / P.12	
	Outside		WT-5645 / P.13 WT-5845 / P.12		WT-5645 / P.13 WT-5845 / P.12	
<b>Tiles</b> 	Indoor	WT-5124 / P.19 WT-5224 / P.19	WT-5429 / P.16 WT-5420 / P.17	WT-500 / P.11 WT-5224 / P.19	WT-5429 / P.16 WT-5420 / P.17	
	Outside					
<b>Concrete paving</b> 	Indoor	WT-5846 / P.12 WT-5645 / P.12	WT-5845 / P.12 WT-5645 / P.12	WT-5846 / P.12 WT-5645 / P.12	WT-5845 / P.12 WT-5645 / P.12	
	Outside		WT-5845 / P.12 WT-5645 / P.12		WT-5845 / P.12 WT-5645 / P.12	
<b>Asphalt</b> 	Indoor	WT-5846 / P.12 WT-5645 / P.12	WT-5845 / P.12 WT-5645 / P.12	WT-5846 / P.12 WT-5645 / P.12	WT-5845 / P.12 WT-5645 / P.12	
	Outside		WT-5845 / P.12 WT-5645 / P.12		WT-5845 / P.12 WT-5645 / P.12	

**Convince yourself of our quality!**

Request our folding card floor marking tapes with all product samples now and see for yourself!









# Floor marking

- | Floor marking tapes
- | Printed floor marking
- | Segmented floor marking
- | Zebra crossing
- | Labelling pockets
- | Floor marking signs
- | Storage location marker
- | Optical lane guidance
- | Magnetic lane guidance
- | Ground signs - Outdoor
- | Safety signs for the ground

# Floor marking tapes

For all requirements and with special properties



**WT-500**

- | Bevelled edges
- | Extremely wear-resistant



## Drive-over floor marking tape || WT-6000

Holds to what it promises



- Extremely wear-resistant
- High resistance with permanent load
- Dirt-resistant surface
- Only suitable for smooth floors indoors

**Material:** metal

**Material thickness:** 0.6 mm


**Surface:** glossy

**Adhesive:** permanent acrylate adhesive

**Application area:** indoor



Colour		75 mm x 1,5 m	75 mm x 6 m	100 mm x 1,5 m	100 mm x 6 m
yellow		5611.04.075	5611.04.075-6	5611.04.100	5611.04.100-6
red		5611.01.075	5611.01.075-6	-	-
blue		5611.10.075	5611.10.075-6	-	-
green		5611.02.075	5611.02.075-6	-	-
grey		5611.06.075	5611.06.075-6	-	-
white		5611.08.075	5611.08.075-6	5611.08.100	5611.08.100-6
black		5611.07.075	5611.07.075-6	-	-

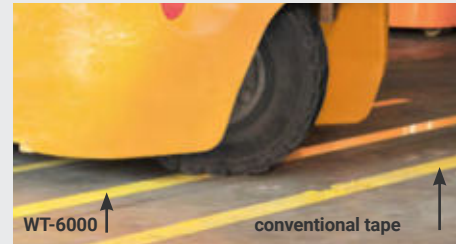

## Resistant floor marking tape || WT-500

Tape with flattened edges



- Flattened edges prevent damage to the border
- Wear-resistant and high resistance with permanent load
- Dirt-resistant surface
- Only suitable for smooth floors indoors

**Material:** PVC

**Material thickness:** 1.1 mm

**Surface:** matt

**Adhesive:** permanent acrylate adhesive

**Application area:** indoor



Colour		50 mm x 25 m	50 mm x 10 m	75 mm x 25 m	75 mm x 10 m	100 mm x 25 m	100 mm x 10 m
yellow		6125.04.050	6125.04.050-10	6125.04.075	6125.04.075-10	6125.04.100	6125.04.100-10
red		6125.01.050	6125.01.050-10	6125.01.075	6125.01.075-10	6125.01.100	6125.01.100-10
blue		6125.10.050	6125.10.050-10	6125.10.075	6125.10.075-10	6125.10.100	6125.10.100-10
green		6125.02.050	6125.02.050-10	6125.02.075	6125.02.075-10	6125.02.100	6125.02.100-10
white		6125.08.050	6125.08.050-10	6125.08.075	6125.08.075-10	6125.08.100	6125.08.100-10
black		6125.07.050	6125.07.050-10	6125.07.075	6125.07.075-10	6125.07.100	6125.07.100-10
yellow/black		6125.17.050-25L	6125.17.050-10L	6125.17.075-25L	6125.17.075-10L	6125.17.100-25L	6125.17.100-10L
red/white		6125.18.050-25L	6125.18.050-10L	6125.18.075-25L	6125.18.075-10L	6125.18.100-25L	6125.18.100-10L

**Laying instructions:** when laying lengths of 10m or more, we recommend installing expansion joints of 5 mm

## Durable floor marking tape || WT-5846

The tape for difficult ground



- | Like WT-5845, but with a smooth surface
- | Extremely wear-resistant and strongly adhesive
- | Suitable for rough and uneven surfaces

**Material:** PU

**Material thickness:** 1.1 mm

**Surface:** slightly glossy

**Slip class:** /

**Adhesive:** extra permanent synthetic rubber

**Application area:** for indoors



Colour	50 mm x 25 m	50 mm x 12,5 m	75 mm x 25 m	75 mm x 12,5 m	100 mm x 25 m	100 mm x 12,5 m
yellow	5846.04.050	5846.04.050-12	5846.04.075	5846.04.075-12	5846.04.100	5846.04.100-12
red	5846.01.050	5846.01.050-12	5846.01.075	5846.01.075-12	5846.01.100	5846.01.100-12
blue	5846.10.050	5846.10.050-12	5846.10.075	5846.10.075-12	5846.10.100	5846.10.100-12
green	5846.02.050	5846.02.050-12	5846.02.075	5846.02.075-12	5846.02.100	5846.02.100-12
white	5846.08.050	5846.08.050-12	5846.08.075	5846.08.075-12	5846.08.100	5846.08.100-12

**Laying instructions:** outside, pre-treat the substrate with Primer No. 5

## Durable floor marking tape || WT-5845

The anti-slip tape for difficult ground



- | Retro reflective and anti-slip R11 surface
- | Extremely wear-resistant and strongly adhesive
- | Can also be used outdoors
- | Suitable for rough and uneven surfaces

**Material:** PU


**Material thickness:** 1.6 mm

**Surface:** reflective

**Slip class:** R11

**Adhesive:** extra permanent synthetic rubber

**Application area:** for indoors and outdoors

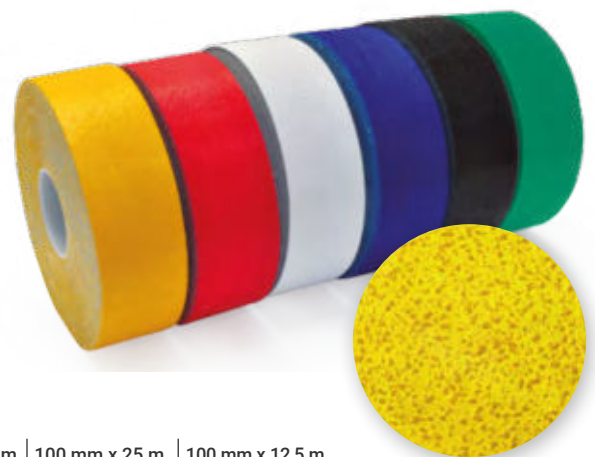

Colour	50 mm x 25 m	50 mm x 12,5 m	75 mm x 25 m	75 mm x 12,5 m	100 mm x 25 m	100 mm x 12,5 m
yellow	5845.04.050	5845.04.050-12	5845.04.075	5845.04.075-12	5845.04.100	5845.04.100-12
red	5845.01.050	5845.01.050-12	5845.01.075	5845.01.075-12	5845.01.100	5845.01.100-12
blue	5845.10.050	5845.10.050-12	5845.10.075	5845.10.075-12	5845.10.100	5845.10.100-12
green	5845.02.050	5845.02.050-12	5845.02.075	5845.02.075-12	5845.02.100	5845.02.100-12
white	5845.08.050	5845.08.050-12	5845.08.075	5845.08.075-12	5845.08.100	5845.08.100-12
black	5845.07.050	5845.07.050-12	5845.07.075	5845.07.075-12	5845.07.100	5845.07.100-12

### Primer No. 5

- | Primer No. 5 increases the adhesive strength of a tape on critical surfaces
- | **ALWAYS** required for outdoor use!



250 ml (0.75 m²)	1000 ml (3 m²)
3051.25.250	3051.25.1000

**Laying instructions:** outside, pre-treat the substrate with Primer No. 5

### Pressure roller

- | Profi-pressure roller for laying self-adhesive markings



Short version (1)	Long version (2)
8002.11.032	8002.00.921

## Tactile floor marking tape || WT-5847/48

The tape for visually impaired people



- Optical and tactile differentiation from conventional tapes
- Allows visually impaired people to find their way around
- Extremely wear-resistant and strongly adhesive
- Grip and non-slip surface, also when wet
- Can also be used outdoors
- Suitable for rough and uneven surfaces

**Material:** PU

**Material thickness:** 2.2 mm

**Surface:** matt reflective

**Slip class:** /

**Adhesive:** extra permanent synthetic rubber

**Application area:** for indoors and outdoors



Colour	30 mm x 12,5 m	50 mm x 12,5 m	75 mm x 12,5 m	100 mm x 12,5 m
yellow	5847.04.030-12	5847.04.050-12	5847.04.075-12	5847.04.100-12
white	5847.08.030-12	5847.08.050-12	5847.08.075-12	5847.08.100-12

**Laying instructions:** outside, pre-treat the substrate with Primer No. 5

## Conformable floor marking tape || WT-5645

The tape that gets things into shape



- Adapts to the profile of the substrate
- Slip resistance R12
- Especially for uneven substrates e.g. anti-slip coatings, concrete paving, asphalt floors and checker plates

**Material:** coated soft aluminium

**Material thickness:** 0.6 mm

**Surface:** slightly glossy

**Slip class:** R12

**Adhesive:** extra permanent synthetic rubber

**Application area:** for indoors and outdoors











Colour	50 mm x 12,5 m	75 mm x 12,5 m	100 mm x 12,5 m
yellow	5645.04.050-12	5645.04.075-12	5645.04.100-12
white	5645.08.050-12	5645.08.075-12	5645.08.100-12

**Laying instructions:** use pressure rollers for profiled surfaces. Outside, pre-treat the substrate with Primer No. 5

## Conformable storage location marking || WT-5610

- Ideal for marking pallet storage locations
- Further materials, designs and colours can be found on page 24 in this catalogue

	L-pieces 50 mm 	L-pieces 75 mm 	T-pieces 50 mm 	T-pieces 75 mm 	longitudinal pieces 50 mm 	longitudinal pieces 75 mm 	round 50 mm 	round 75 mm 
<b>Colour</b>	<b>25 Pieces/PU</b>	<b>25 Pieces/PU</b>	<b>25 Pieces/PU</b>	<b>25 Pieces/PU</b>	<b>25 Pieces/PU</b>	<b>25 Pieces/PU</b>	<b>25 Pieces/PU</b>	<b>25 Pieces/PU</b>
yellow	5610.04.060	5610.04.063	5610.04.061	5610.04.065	5610.04.071	5610.04.073	5610.04.069	5610.04.070
white	5610.08.060	5610.08.063	5610.08.061	5610.08.065	5610.08.071	5610.08.073	5610.08.069	5610.08.070

## Standard floor marking tape || WT-5160



### The general tape

- Sticks quickly
- Easily removable
- Ideal for variable marking
- Suitable for smooth floors indoors

**Material:** PVC

**Material thickness:** 0.16 mm

**Surface:** matt

**Adhesive:** good adhesion rubber adhesive

**Application area:** indoor



Colour		50 mm x 33 m	75 mm x 33 m
yellow		5160.04.050	5160.04.075
red		5160.01.050	5160.01.075
orange		5160.12.050	5160.12.075
blue		5160.10.050	5160.10.075
green		5160.02.050	5160.02.075
white		5160.08.050	5160.08.075
black		5160.07.050	5160.07.075
yellow/black		5160.17.050	5160.17.075
red/white		5160.18.050	5160.18.075

## Standard marking tape plus || WT-5164

- Similar to WT-5160, additionally with protective laminate

Colour		50 mm x 33 m	75 mm x 33 m
black		5164.07.050	5164.07.075
yellow/black		5164.17.050	5164.17.075
red/white		5164.18.050	5164.18.075

## Floor marking tape || WT-5125



### The universal tape

- Hard-wearing and durable tape
- Available as segmented marking p.18 and storage location marking p.24
- Wide range of colours and individually printable
- Suitable for smooth indoor floors

**Material:** PVC

**Material thickness:** 0.6 mm

**Surface:** matt

**Adhesive:** permanent acrylate adhesive

**Application area:** indoor



Also with extra strong adhesive for difficult substrates - on request!

Colour		50 mm x 25 m	50 mm x 10 m	75 mm x 25 m	75 mm x 10 m	100 mm x 25 m	100 mm x 10 m
yellow		5125.04.050	5125.04.050-10	5125.04.075	5125.04.075-10	5125.04.100	5125.04.100-10
red		5125.01.050	5125.01.050-10	5125.01.075	5125.01.075-10	5125.01.100	5125.01.100-10
light blue		5125.03.050	5125.03.050-10	5125.03.075	5125.03.075-10	5125.03.100	5125.03.100-10
blue		5125.10.050	5125.10.050-10	5125.10.075	5125.10.075-10	5125.10.100	5125.10.100-10
light green		5125.15.050	5125.15.050-10	5125.15.075	5125.15.075-10	5125.15.100	5125.15.100-10
green		5125.02.050	5125.02.050-10	5125.02.075	5125.02.075-10	5125.02.100	5125.02.100-10
orange		5125.12.050	5125.12.050-10	5125.12.075	5125.12.075-10	5125.12.100	5125.12.100-10
pink		5125.25.050	5125.25.050-10	5125.25.075	5125.25.075-10	5125.25.100	5125.25.100-10
purple		5125.26.050	5125.26.050-10	5125.26.075	5125.26.075-10	5125.26.100	5125.26.100-10
white		5125.08.050	5125.08.050-10	5125.08.075	5125.08.075-10	5125.08.100	5125.08.100-10
light grey		5125.06.050	5125.06.050-10	5125.06.075	5125.06.075-10	5125.06.100	5125.06.100-10
grey		5125.11.050	5125.11.050-10	5125.11.075	5125.11.075-10	5125.11.100	5125.11.100-10
black		5125.07.050	5125.07.050-10	5125.07.075	5125.07.075-10	5125.07.100	5125.07.100-10
yellow/black		5125.17.050	5125.17.050-10	5125.17.075	5125.17.075-10	5125.17.100	5125.17.100-10
red/white		5125.18.050	5125.18.050-10	5125.18.075	5125.18.075-10	5125.18.100	5125.18.100-10
blue/white		-	5125.21.050-10	-	5125.21.075-10	-	5125.21.100-10
green/white		-	5125.19.050-10	-	5125.19.075-10	-	5125.19.100-10
black/white		-	5125.20.050-10	-	5125.20.075-10	-	5125.20.100-10

# Printed floor marking

## For labelling of important areas



### Universal printed ground marking

The ideal complement to the tape WT-5125

- Individual design – text and characters freely combinable
- Available as strips or rolled goods
- Slip resistance R10 according to the variant
- Suitable for smooth floors indoors



length	50 mm	75 mm
60 cm	5125.99.B50-06	5125.99.B75-06
5 m	5125.99.B50-5	5125.99.B75-5
60 cm	5415.99.B50-06 <i>anti-slip surface</i>	5415.99.B75-06 <i>anti-slip surface</i>



length	50 mm	75 mm
60 cm	5125.84.B50-06	5125.84.B75-06
5 m	5125.84.B50-5	5125.84.B75-5
60 cm	5415.84.B50-06 <i>anti-slip surface</i>	5415.84.B75-06 <i>anti-slip surface</i>



length	50 mm	75 mm
60 cm	5125.78.B50-06	5125.78.B75-06
5 m	5125.78.B50-5	5125.78.B75-5
60 cm	5415.78.B50-06 <i>anti-slip surface</i>	5415.78.B75-06 <i>anti-slip surface</i>



length	50 mm	75 mm
60 cm	5125.60.B50-06	5125.60.B75-06
5 m	5125.60.B50-5	5125.60.B75-5
60 cm	5415.60.B50-06 <i>anti-slip surface</i>	5415.60.B75-06 <i>anti-slip surface</i>



length	50 mm	75 mm
60 cm	5125.85.B50-06	5125.85.B75-06
5 m	5125.85.B50-5	5125.85.B75-5
60 cm	5415.85.B50-06 <i>anti-slip surface</i>	5415.85.B75-06 <i>anti-slip surface</i>



length	50 mm	75 mm
60 cm	5125.49.1.B50-06	5125.49.1.B75-06
5 m	5125.49.1.B50-5	5125.49.1.B75-5
60 cm	5415.49.1.B50-06 <i>anti-slip surface</i>	5415.49.1.B75-06 <i>anti-slip surface</i>



Also available in photoluminescent!

## Dirt-repellent ground marking tape || WT-5229

The extra thin tape for high demands

- | Suitable for hygiene, food and clean room areas
- | Extra thin and tear-resistant
- | Also available as segmented marking and storage location marking
- | Suitable for smooth floors indoors

**Material:** PET

**Material thickness:** 0.2 mm

**Surface:** gloss

**Adhesive:** permanent or removable acrylate adhesive

**Application area:** indoor



Suitable storage location marking can be found on page 24

Colour		Permanent adhesive		
		50 mm x 15 m	75 mm x 15 m	100 mm x 15 m
yellow		5229.04.050-15	5229.04.075-15	5229.04.100-15
red		5229.01.050-15	5229.01.075-15	5229.01.100-15
blue		5229.10.050-15	5229.10.075-15	5229.10.100-15
green		5229.02.050-15	5229.02.075-15	5229.02.100-15
orange		5229.12.050-15	5229.12.075-15	5229.12.100-15
white		5229.08.050-15	5229.08.075-15	5229.08.100-15
black		5229.07.050-15	5229.07.075-15	5229.07.100-15
yellow/black		5229.17.050-15	5229.17.075-15	5229.17.100-15
red/white		5229.18.050-15	5229.18.075-15	5229.18.100-15
black/white		5229.20.050-15	5229.20.075-15	5229.20.100-15
photoluminescent*		5127.29.050-10	5127.29.075-10	5127.29.100-10

\*Material thickness: 0.6 mm / Attention length: 10 m

50 mm x 15 m	75 mm x 15 m	100 mm x 15 m
5229.1.04.050-15	5229.1.04.075-15	5229.1.04.100-15
5229.1.01.050-15	5229.1.01.075-15	5229.1.01.100-15
5229.1.10.050-15	5229.1.10.075-15	5229.1.10.100-15
5229.1.02.050-15	5229.1.02.075-15	5229.1.02.100-15
5229.1.12.050-15	5229.1.12.075-15	5229.1.12.100-15
5229.1.08.050-15	5229.1.08.075-15	5229.1.08.100-15
5229.1.07.050-15	5229.1.07.075-15	5229.1.07.100-15
5229.1.17.050-15	5229.1.17.075-15	5229.1.17.100-15
5229.1.18.050-15	5229.1.18.075-15	5229.1.18.100-15
5229.1.20.050-15	5229.1.20.075-15	5229.1.20.100-15
-	-	-

## Floor marking tape with anti-slip surface || WT-5429

The extra thin tape for high demands

- | Suitable for hygiene, food and clean room areas
- | Slip resistance R10
- | Easy to clean, extra thin and tear-resistant
- | Large variety of colours and individually printable on request
- | Suitable for smooth floors indoors

**Material:** plastic foil

**Material thickness:** 0.3 mm

**Surface:** glossy

**Slip class:** R10

**Adhesive:** permanent or removable acrylate adhesive

**Application area:** indoor



Colour		Permanent adhesive		
		50 mm x 10 m	75 mm x 10 m	100 mm x 10 m
yellow		5429.04.050-10	5429.04.075-10	5429.04.100-10
red		5429.01.050-10	5429.01.075-10	5429.01.100-10
blue		5429.10.050-10	5429.10.075-10	5429.10.100-10
green		5429.02.050-10	5429.02.075-10	5429.02.100-10
orange		5429.12.050-10	5429.12.075-10	5429.12.100-10
white		5429.08.050-10	5429.08.075-10	5429.08.100-10
black		5429.07.050-10	5429.07.075-10	5429.07.100-10
yellow/black		5429.17.050-10	5429.17.075-10	5429.17.100-10
red/white		5429.18.050-10	5429.18.075-10	5429.18.100-10
black/white		5429.20.050-10	5429.20.075-10	5429.20.100-10
photoluminescent*		5429.29.050-10	5429.29.075-10	5429.29.100-10

\*Material thickness: 0.6 mm

50 mm x 10 m	75 mm x 10 m	100 mm x 10 m
5429.1.04.050-10	5429.1.04.075-10	5429.1.04.100-10
5429.1.01.050-10	5429.1.01.075-10	5429.1.01.100-10
5429.1.10.050-10	5429.1.10.075-10	5429.1.10.100-10
5429.1.02.050-10	5429.1.02.075-10	5429.1.02.100-10
5429.1.12.050-10	5429.1.12.075-10	5429.1.12.100-10
5429.1.08.050-10	5429.1.08.075-10	5429.1.08.100-10
5429.1.07.050-10	5429.1.07.075-10	5429.1.07.100-10
5429.1.17.050-10	5429.1.17.075-10	5429.1.17.100-10
5429.1.18.050-10	5429.1.18.075-10	5429.1.18.100-10
5429.1.20.050-10	5429.1.20.075-10	5429.1.20.100-10
-	-	-



# Floor marking tape with anti-slip surface plus || WT-5420

The extra thin tape for high demands R12



- ✓ Suitable for wet, dry and sanitary areas
- ✓ Slip resistance R12 / Class C
- ✓ Extra thin and tear-resistant
- ✓ Large variety of colours and individually printable on request
- ✓ Suitable for smooth floors indoors



**Material:** plastic foil  
**Material thickness:** 0.4 mm  
**Surface:** glossy  
**Slip class:** R12, Class C  
**Adhesive:** permanent or removable acrylate adhesive  
**Application area:** indoor

Colour	Permanent adhesive		
	50 mm x 10 m	75 mm x 10 m	100 mm x 10 m
yellow	5420.04.050-10	5420.04.075-10	5420.04.100-10
red	5420.01.050-10	5420.01.075-10	5420.01.100-10
blue	5420.10.050-10	5420.10.075-10	5420.10.100-10
green	5420.02.050-10	5420.02.075-10	5420.02.100-10
orange	5420.12.050-10	5420.12.075-10	5420.12.100-10
white	5420.08.050-10	5420.08.075-10	5420.08.100-10
black	5420.07.050-10	5420.07.075-10	5420.07.100-10
yellow/black	5420.17.050-10	5420.17.075-10	5420.17.100-10
red/white	5420.18.050-10	5420.18.075-10	5420.18.100-10
black/white	5420.20.050-10	5420.20.075-10	5420.20.100-10

Removable adhesive		
50 mm x 10 m	75 mm x 10 m	100 mm x 10 m
5420.1.04.050-10	5420.1.04.075-10	5420.1.04.100-10
5420.1.01.050-10	5420.1.01.075-10	5420.1.01.100-10
5420.1.10.050-10	5420.1.10.075-10	5420.1.10.100-10
5420.1.02.050-10	5420.1.02.075-10	5420.1.02.100-10
5420.1.12.050-10	5420.1.12.075-10	5420.1.12.100-10
5420.1.08.050-10	5420.1.08.075-10	5420.1.08.100-10
5420.1.07.050-10	5420.1.07.075-10	5420.1.07.100-10
5420.1.17.050-10	5420.1.17.075-10	5420.1.17.100-10
5420.1.18.050-10	5420.1.18.075-10	5420.1.18.100-10
5420.1.20.050-10	5420.1.20.075-10	5420.1.20.100-10

## Printed floor marking

The ideal complement to tapes WT-5229, WT-5429 and WT-5420

- ✓ Individual design – text and characters freely combinable
- ✓ Available as strips or rolled goods
- ✓ Slip resistance according to the variant
- ✓ Easy to clean, extra thin and tear-resistant



material	length	50 mm	75 mm
WT-5229 permanent	60 cm	5229.99.B50-06	5229.99.B75-06
	5 m	5229.99.B50-5	5229.99.B75-5
WT-5429 permanent	60 cm	5429.99.B50-06	5429.99.B75-06
	5 m	5429.99.B50-5	5429.99.B75-5
WT-5420 permanent	60 cm	5420.99.B50-06	5420.99.B75-06
	5 m	5420.99.B50-5	5420.99.B75-5



material	length	50 mm	75 mm
WT-5229 permanent	60 cm	5229.85.B50-06	5229.85.B75-06
	5 m	5229.85.B50-5	5229.85.B75-5
WT-5429 permanent	60 cm	5429.85.B50-06	5429.85.B75-06
	5 m	5429.85.B50-5	5429.85.B75-5
WT-5420 permanent	60 cm	5420.85.B50-06	5420.85.B75-06
	5 m	5420.85.B50-5	5420.85.B75-5



material	length	50 mm	75 mm
WT-5229 permanent	60 cm	5229.84.B50-06	5229.84.B75-06
	5 m	5229.84.B50-5	5229.84.B75-5
WT-5429 permanent	60 cm	5429.84.B50-06	5429.84.B75-06
	5 m	5429.84.B50-5	5429.84.B75-5
WT-5420 permanent	60 cm	5420.84.B50-06	5420.84.B75-06
	5 m	5420.84.B50-5	5420.84.B75-5



material	length	50 mm	75 mm
WT-5229 permanent	60 cm	5229.49.1.B50-06	5229.49.1.B75-06
	5 m	5229.49.1.B50-5	5229.49.1.B75-5
WT-5429 permanent	60 cm	5429.49.1.B50-06	5429.49.1.B75-06
	5 m	5429.49.1.B50-5	5429.49.1.B75-5
WT-5420 permanent	60 cm	5420.49.1.B50-06	5420.49.1.B75-06
	5 m	5420.49.1.B50-5	5420.49.1.B75-5




material	length	50 mm	75 mm
WT-5229 permanent	60 cm	5229.78.B50-06	5229.78.B75-06
	5 m	5229.78.B50-5	5229.78.B75-5
WT-5429 permanent	60 cm	5429.78.B50-06	5429.78.B75-06
	5 m	5429.78.B50-5	5429.78.B75-5
WT-5420 permanent	60 cm	5420.78.B50-06	5420.78.B75-06
	5 m	5420.78.B50-5	5420.78.B75-5



material	length	50 mm	75 mm
WT-5229 permanent	60 cm	5229.60.B50-06	5229.60.B75-06
	5 m	5229.60.B50-5	5229.60.B75-5
WT-5429 permanent	60 cm	5429.60.B50-06	5429.60.B75-06
	5 m	5429.60.B50-5	5429.60.B75-5
WT-5420 permanent	60 cm	5420.60.B50-06	5420.60.B75-06
	5 m	5420.60.B50-5	5420.60.B75-5

# Segmented floor marking

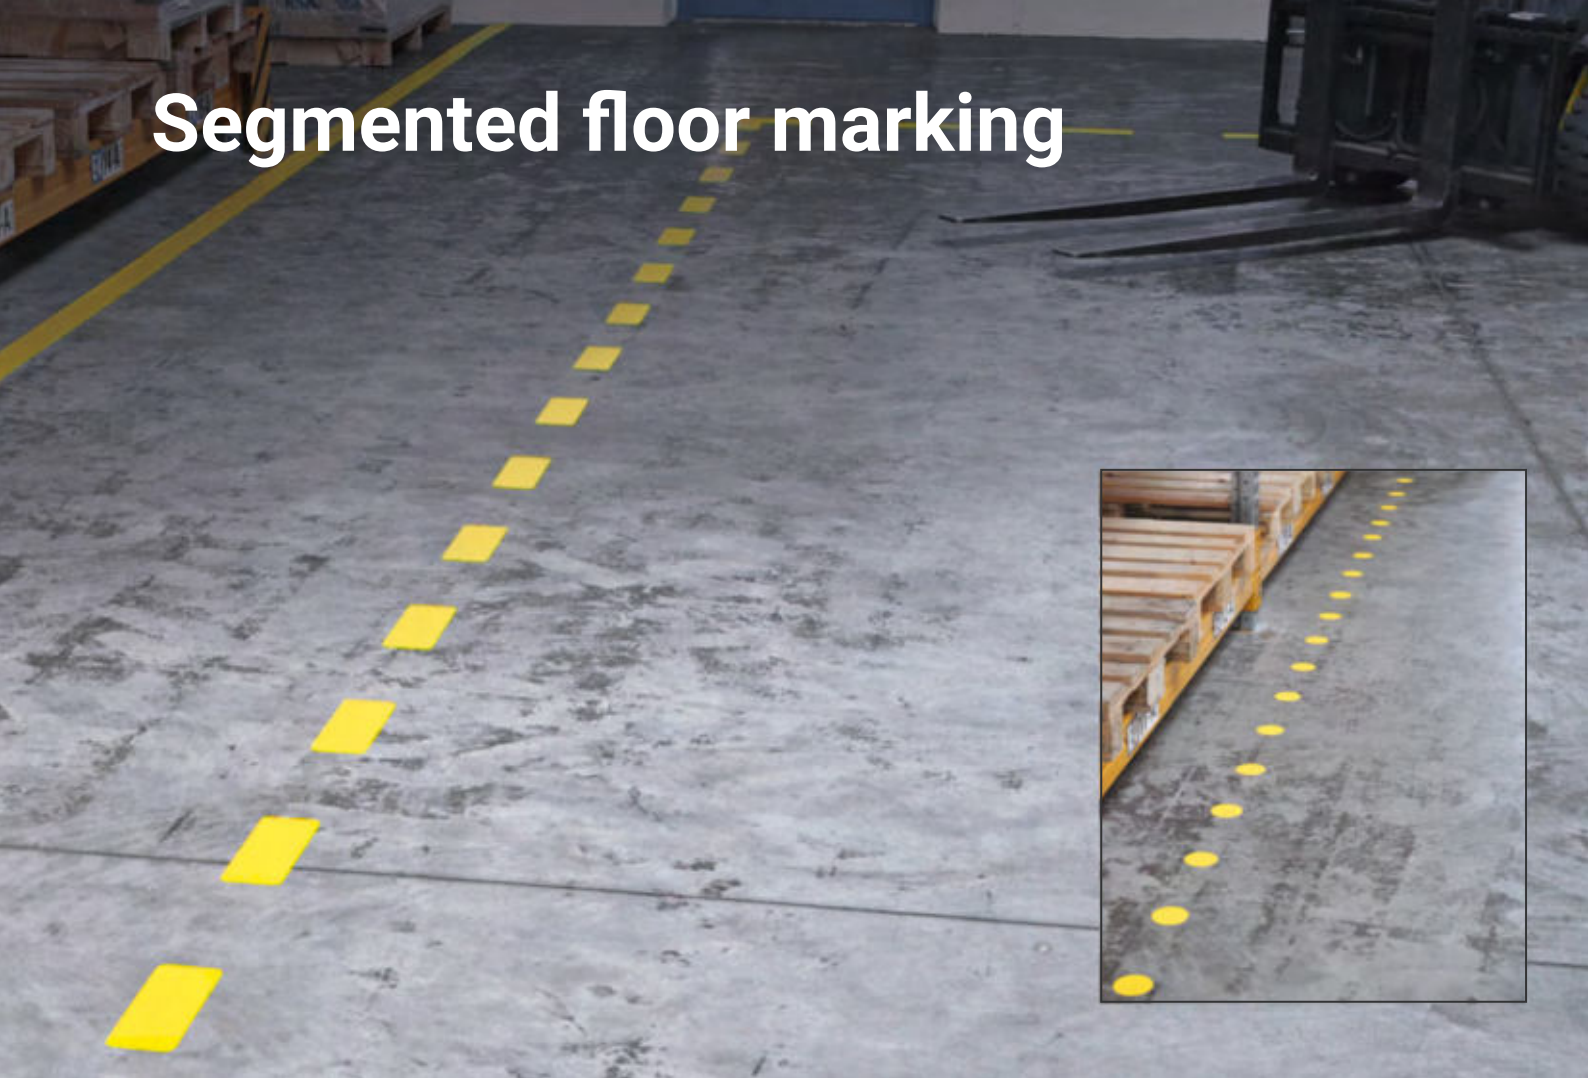


## Floor marking strips and dots

The alternative to continuous marking tape



- | Fast replacement of damaged dots
- | Time and cost saving
- | Ideal for heavy use
- | Simple bonding due to mounting foil
- | Very good floor bond
- | Suitable for smooth floors indoors

Distance of the dots




Distance of the strips



\* Tolerance  $\pm 2\text{mm}$



Easy laying of rolls

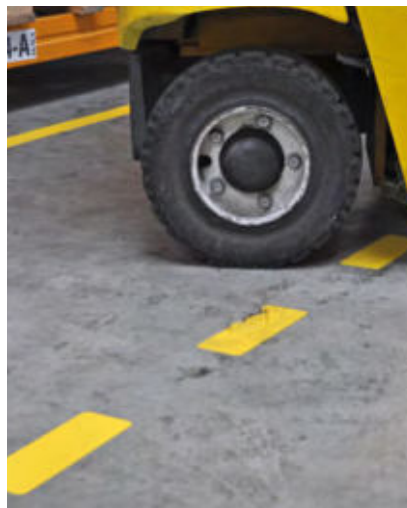

Fast replacement in case of damage

## Universal segmented floor marking || WT-5126 / WT-5124

The ideal complement to the tape WT-5125

Suitable for smooth floors indoors

**Material:** PVC (like WT-5125)

**Material thickness:** 0.6 mm

**Surface:** matt

**Adhesive:** permanent acrylate adhesive


**Application area:** indoor

### Dots | WT-5126

Colour	Rolls		Repair kit	
	50 mm x 25 m	75 mm x 25 m	50 mm   25 dots/PU	75 mm   25 dots/PU
yellow	5126.04.050	5126.04.075	5126.04.050.E	5126.04.075.E
red	5126.01.050	5126.01.075	5126.01.050.E	5126.01.075.E
blue	5126.10.050	5126.10.075	5126.10.050.E	5126.10.075.E
green	5126.02.050	5126.02.075	5126.02.050.E	5126.02.075.E
white	5126.08.050	5126.08.075	5126.08.050.E	5126.08.075.E
black	5126.07.050	5126.07.075	5126.07.050.E	5126.07.075.E

### Strips | WT-5124

Colour	Rolls		Repair kit	
	50 mm x 25 m	75 mm x 25 m	50 mm   25 strips/PU	75 mm   25 strips/PU
yellow	5124.04.050	5124.04.075	5124.04.050.E	5124.04.075.E
red	5124.01.050	5124.01.075	5124.01.050.E	5124.01.075.E
blue	5124.10.050	5124.10.075	5124.10.050.E	5124.10.075.E
green	5124.02.050	5124.02.075	5124.02.050.E	5124.02.075.E
white	5124.08.050	5124.08.075	5124.08.050.E	5124.08.075.E
black	5124.07.050	5124.07.075	5124.07.050.E	5124.07.075.E

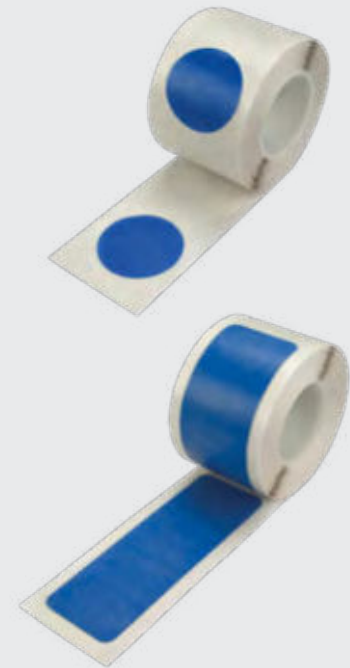

## Dirt repellent segmented floor marking || WT-5226 / WT-5224

The ideal complement to the tape WT-5229

Suitable for smooth floors indoors

**Material:** PET (like WT-5229)

**Material thickness:** 0.2 mm extra thin and tear-resistant

**Surface:** glossy

**Adhesive:** permanent acrylate adhesive

**Application area:** indoor

### Points | WT-5226

Colour	Rolls		Repair kit	
	50 mm x 25 m	75 mm x 25 m	50 mm   25 dots/PU	75 mm   25 dots/PU
yellow	5226.04.050	5226.04.075	5226.04.050.E	5226.04.075.E
red	5226.01.050	5226.01.075	5226.01.050.E	5226.01.075.E
blue	5226.10.050	5226.10.075	5226.10.050.E	5226.10.075.E
green	5226.02.050	5226.02.075	5226.02.050.E	5226.02.075.E
white	5226.08.050	5226.08.075	5226.08.050.E	5226.08.075.E
black	5226.07.050	5226.07.075	5226.07.050.E	5226.07.075.E

### Strips | WT-5224

Colour	Rolls		Repair kit	
	50 mm x 25 m	75 mm x 25 m	50 mm   25 strips/PU	75 mm   25 strips/PU
yellow	5224.04.050	5224.04.075	5224.04.050.E	5224.04.075.E
red	5224.01.050	5224.01.075	5224.01.050.E	5224.01.075.E
blue	5224.10.050	5224.10.075	5224.10.050.E	5224.10.075.E
green	5224.02.050	5224.02.075	5224.02.050.E	5224.02.075.E
white	5224.08.050	5224.08.075	5224.08.050.E	5224.08.075.E
black	5224.07.050	5224.07.075	5224.07.050.E	5224.07.075.E



# Photoluminescent floor marking

## With integrated photoluminescent central strip




### Floor marking tape with photoluminescent escape route marking || WT-5127



The ideal marking in the dark or in case of heavy smoke development


- Self-adhesive guide marking for wall and floor
- Extra high luminance **200/25 mcd/m<sup>2</sup> according to DIN 67510 (class C)**
- Current-independent, maintenance-free and fail-safe
- The right variant for every requirement

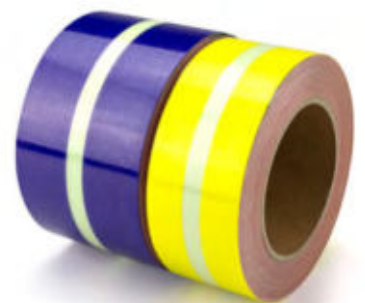

**Material:** PET/PVC  
**Material thickness:** 0,6 mm  
**Surface:** glossy  
**Slip class:** /  
**Glue:** permanent acrylic adhesive  
**Application area:** indoor

**Material:** PVC with anti-slip surface  
**Material thickness:** 1,0 mm  
**Surface:** matt  
**Slip class:** R10  
**Glue:** permanent acrylic adhesive  
**Application area:** indoor

Material	Colour		50 mm x 10 m	75 mm x 10 m
PET/PVC	yellow		5127.1.04.B050-10	5127.1.04.B075-10
	red		5127.1.01.B050-10	5127.1.01.B075-10
	blue		5127.1.10.B050-10	5127.1.10.B075-10
	green		5127.1.02.B050-10	5127.1.02.B075-10
	white		5127.1.08.B050-10	5127.1.08.B075-10
	orange		5127.1.12.B050-10	5127.1.12.B075-10
PVC R11 anti-slip	yellow		5427.1.04.B050-10	5427.1.04.B075-10
	red		5427.1.01.B050-10	5427.1.01.B075-10
	blue		5427.1.10.B050-10	5427.1.10.B075-10
	green		5427.1.02.B050-10	5427.1.02.B075-10
	white		5427.1.08.B050-10	5427.1.08.B075-10
	orange		5427.1.12.B050-10	5427.1.12.B075-10

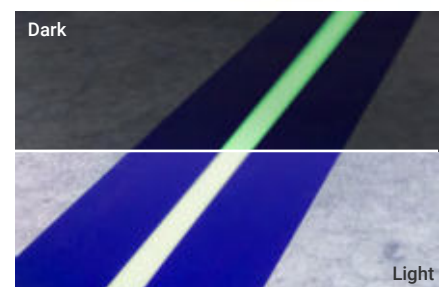

Further photoluminescent markings can be found on page 46!

# Crosswalk

## More safety when crossing roads

### Crosswalk || WT-5110 / WT-7110 / WT-5845

The safe and simple solution for pedestrians




- High warning and information effect
- High durability
- Can be driven over already after laying

**Material:** PVC (like tape WT-5125)  
**Material thickness:** 0.6 mm  
**Surface:** matt  
**Glue:** permanent acrylic adhesive  
**Floors:** for smooth and gap-free floors  
**Application area:** indoor

**Material:** polycarbonate  
**Material thickness:** 0.7 mm  
**Surface:** matt  
**Glue:** permanent acrylic adhesive  
**Floors:** for smooth and gap-free floors  
**Application area:** indoor

**Material:** PU (like tape WT-5845)  
**Material thickness:** 1.6 mm  
**Surface:** reflective  
**Slip class:** R11  
**Glue:** permanent synthetic rubber  
**Application area:** indoor- and outdoors

Laying suggestion:

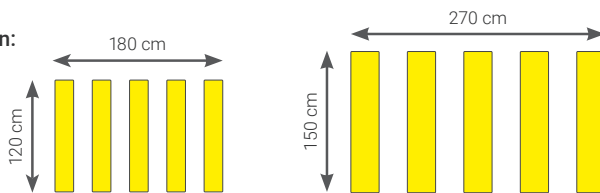

Laying instructions: outside, pre-treat the substrate with Primer No. 5

Set 5 Strips/PU	PVC – WT-5110		Polycarbonate – WT-7110		PU – WT-5845	
	20 cm x 120 cm	30 cm x 150 cm	20 cm x 120 cm	30 cm x 150 cm	20 cm x 120 cm	30 cm x 150 cm
yellow	5110.04.200-1200.S	5110.04.300-1500.S	7110.04.200-1200.S	7110.04.300-1500.S	5845.04.200-1200.S	5845.04.300-1500.S
white	5110.08.200-1200.S	5110.08.300-1500.S	7110.08.200-1200.S	7110.08.300-1500.S	5845.08.200-1200.S	5845.08.300-1500.S

Single strips	PVC – WT-5110		Polycarbonate – WT-7110		PU – WT-5845	
	20 cm x 120 cm	30 cm x 150 cm	20 cm x 120 cm	30 cm x 150 cm	20 cm x 120 cm	30 cm x 150 cm
yellow	5110.04.200-1200	5110.04.300-1500	7110.04.200-1200	7110.04.300-1500	5845.04.200-1200	5845.04.300-1500
white	5110.08.200-1200	5110.08.300-1500	7110.08.200-1200	7110.08.300-1500	5845.08.200-1200	5845.08.300-1500

Single strips forklift traffic	PVC – WT-5110		Polycarbonate – WT-7110	
	20 cm x 120 cm	30 cm x 150 cm	20 cm x 120 cm	30 cm x 150 cm
yellow	5110.78.200-1200	5110.78.300-1500	7110.78.200-1200	7110.78.300-1500



# Floor marking & labels

## For structured and clean marking



### Labelling pockets

For exchangeable or fixed labelling



- | Open for interchangeable labelling
- | Closed to protect against moisture
- | Easy and fast bonding
- | Very good floor bond
- | Suitable for smooth floors indoors


**Material:** PVC

**Material thickness:** 1.2 mm

**Surface:** slightly glossy

**Adhesive:** permanent acrylate adhesive

**Application area:** indoor

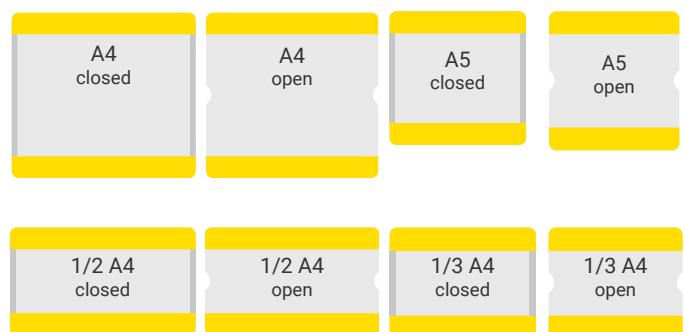

	A4 closed indoor: 210 x 297 mm exterior: 290 x 323 mm	A4 open indoor: 210 x 297 mm exterior: 290 x 302 mm	A5 closed indoor: 148 x 210 mm exterior: 231 x 236 mm	A5 open indoor: 148 x 210 mm exterior: 216 x 231 mm	1/2 A4 closed indoor: 105 x 297 mm exterior: 187 x 323 mm	1/2 A4 open indoor: 105 x 297 mm exterior: 187 x 303 mm	1/3 A4 closed indoor: 99 x 210 mm exterior: 180 x 236 mm	1/3 A4 open indoor: 99 x 210 mm exterior: 180 x 216 mm
Colour	10 pieces/PU	10 pieces/PU	10 pieces/PU	10 pieces/PU	10 pieces/PU	10 pieces/PU	10 pieces/PU	10 pieces/PU
yellow	5118.04.1-A4	5118.04.0-A4	5118.04.1-A5	5118.04.0-A5	5118.04.2-A4	5118.04.5-A4	5118.04.3-A4	5118.04.4-A4
red	5118.01.1-A4	5118.01.0-A4	5118.01.1-A5	5118.01.0-A5	5118.01.2-A4	5118.01.5-A4	5118.01.3-A4	5118.01.4-A4
blue	5118.10.1-A4	5118.10.0-A4	5118.10.1-A5	5118.10.0-A5	5118.10.2-A4	5118.10.5-A4	5118.10.3-A4	5118.10.4-A4
green	5118.02.1-A4	5118.02.0-A4	5118.02.1-A5	5118.02.0-A5	5118.02.2-A4	5118.02.5-A4	5118.02.3-A4	5118.02.4-A4
orange	5118.12.1-A4	5118.12.0-A4	5118.12.1-A5	5118.12.0-A5	5118.12.2-A4	5118.12.5-A4	5118.12.3-A4	5118.12.4-A4
white	5118.08.1-A4	5118.08.0-A4	5118.08.1-A5	5118.08.0-A5	5118.08.2-A4	5118.08.5-A4	5118.08.3-A4	5118.08.4-A4
light grey	5118.06.1-A4	5118.06.0-A4	5118.06.1-A5	5118.06.0-A5	5118.06.2-A4	5118.06.5-A4	5118.06.3-A4	5118.06.4-A4
grey	5118.11.1-A4	5118.11.0-A4	5118.11.1-A5	5118.11.0-A5	5118.11.2-A4	5118.11.5-A4	5118.11.3-A4	5118.11.4-A4
black	5118.07.1-A4	5118.07.0-A4	5118.07.1-A5	5118.07.0-A5	5118.07.2-A4	5118.07.5-A4	5118.07.3-A4	5118.07.4-A4

## Floor marking signs



- For marking warehouse and storage locations
- Individual and scratch-resistant print
- Wear-resistant and high resistance with permanent load
- Suitable for smooth floors indoors

**Material:** polycarbonate

**Material thickness:** 0.7 mm

**Surface:** matt

**Adhesive:** permanent acrylate adhesive

**Application area:** indoor



	100 mm x 120 mm (HxW)	100 mm x 180 mm (HxW)	100 mm x 300 mm (HxW)	150 mm x 200 mm (HxW)	200 mm x 300 mm (HxW)
individually printed	LB99.CA01.100-120	LB99.CA01.100-180	LB99.CA01.100-300	LB99.CA01.150-200	LB99.CA01.200-300

Other sizes, colours or materials on request - we will advise you on your individual solution!

## Durable pictograms || WT-5811

- Retro reflective and anti-slip R11 surface
- Extremely wear-resistant and strongly adhesive

**Material:** PU

**Material thickness:** 1.6 mm

**Surface:** retroreflective

**Slip class:** R11

**Adhesive:** permanent synthetic rubber

**Application area:** for indoors and outdoors

**Laying instructions:** outside, pre-treat the substrate with Primer No. 5

	Pedestrians 600 x 330 mm	Foot print 297 x 110 mm	Forklift 400 x 473 mm	Arrow 145 x 90 mm
<b>Colour</b>	<b>1 pieces/PU</b>	<b>5 pair/PU</b>	<b>1 pieces/PU</b>	<b>10 pieces/PU</b>
yellow	5811.04.101	5811.04.121	5811.04.104	5811.04.131
red	5811.01.101	5811.01.121	5811.01.104	5811.01.131
blue	5811.10.101	5811.10.121	5811.10.104	5811.10.131
green	5811.02.101	5811.02.121	5811.02.104	5811.02.131
white	5811.08.101	5811.08.121	5811.08.104	5811.08.131



## Pictograms || WT-5111

- Wear-resistant and durable

**Material:** PVC (like tape WT-5125)

**Material thickness:** 0.6 mm

**Surface:** matt

**Adhesive:** acrylate

**Application area:** indoor

	Pedestrians 600 x 330 mm	Foot print 297 x 110 mm	Forklift 400 x 473 mm	Arrow 145 x 90 mm
<b>Colour</b>	<b>1 pieces/PU</b>	<b>5 pair/PU</b>	<b>1 pieces/PU</b>	<b>10 pieces/PU</b>
yellow	5111.04.101	5111.04.121	5111.04.104	5111.04.131
red	5111.01.101	5111.01.121	5111.01.104	5111.01.131
blue	5111.10.101	5111.10.121	5111.10.104	5111.10.131
green	5111.02.101	5111.02.121	5111.02.104	5111.02.131
white	5111.08.101	5111.08.121	5111.08.104	5111.08.131



# Storage location marker || WT-5210 / 7110 / 5110 / 5610

For fast and structured marking of storage locations



- || Different materials for different requirements
- || High resistance and strong adhesion
- || Suitable for various indoor floors

**Material:** PET (like tape WT-5229)

**Material thickness:** 0.2 mm

**Surface:** glossy

**Adhesive:** permanent acrylate adhesive

**Ground:** for smooth and gap-free grounds

**Material:** PVC (like tape WT-5125)

**Material thickness:** 0.6 mm

**Surface:** matt

**Adhesive:** permanent acrylate adhesive

**Ground:** for smooth and gap-free grounds

**Material:** Polycarbonate

**Material thickness:** 0.7 mm

**Surface:** matt

**Adhesive:** permanent acrylate adhesive

**Ground:** for smooth and gap-free grounds

**Material:** coated aluminium (like tape WT-5645)








**Material thickness:** 0.6 mm








**Surface:** anti-slip R12 - slightly glossy








**Adhesive:** extra permanent synthetic rubber








**Ground:** for rough and granulated grounds










L-Pieces 	PET – WT-5210		Polycarbonate – WT-7110		PVC – WT-5110		Soft aluminium – WT-5610	
	50 mm	75 mm	50 mm	75 mm	50 mm	75 mm	50 mm	75 mm
	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU
yellow 	5210.04.060	5210.04.063	7110.04.060	7110.04.063	5110.04.060	5110.04.063	5610.04.060	5610.04.063
red 	5210.01.060	5210.01.063	7110.01.060	7110.01.063	5110.01.060	5110.01.063	–	–
blue 	5210.10.060	5210.10.063	7110.10.060	7110.10.063	5110.10.060	5110.10.063	–	–
green 	5210.02.060	5210.02.063	7110.02.060	7110.02.063	5110.02.060	5110.02.063	–	–
white 	5210.08.060	5210.08.063	7110.08.060	7110.08.063	5110.08.060	5110.08.063	5610.08.060	5610.08.063
yellow/black 	5210.17.060	5210.17.063	7110.17.060	7110.17.063	–	–	–	–

T-Pieces 	PET – WT-5210		Polycarbonate – WT-7110		PVC – WT-5110		Soft aluminium – WT-5610	
	50 mm	75 mm	50 mm	75 mm	50 mm	75 mm	50 mm	75 mm
	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU
yellow 	5210.04.061	5210.04.065	7110.04.061	7110.04.065	5110.04.061	5110.04.065	5610.04.061	5610.04.065
red 	5210.01.061	5210.01.065	7110.01.061	7110.01.065	5110.01.061	5110.01.065	–	–
blue 	5210.10.061	5210.10.065	7110.10.061	7110.10.065	5110.10.061	5110.10.065	–	–
green 	5210.02.061	5210.02.065	7110.02.061	7110.02.065	5110.02.061	5110.02.065	–	–
white 	5210.08.061	5210.08.065	7110.08.061	7110.08.065	5110.08.061	5110.08.065	5610.08.061	5610.08.065
yellow/black 	5210.17.061	5210.17.065	7110.17.061	7110.17.065	–	–	–	–

X-Pieces 	PET – WT-5210		Polycarbonate – WT-7110		PVC – WT-5110		Soft aluminium – WT-5610	
	50 mm	75 mm	50 mm	75 mm	50 mm	75 mm	50 mm	75 mm
	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU
yellow 	5210.04.062	5210.04.064	7110.04.062	7110.04.064	5110.04.062	5110.04.064	5610.04.062	5610.04.064
red 	5210.01.062	5210.01.064	7110.01.062	7110.01.064	5110.01.062	5110.01.064	–	–
blue 	5210.10.062	5210.10.064	7110.10.062	7110.10.064	5110.10.062	5110.10.064	–	–
green 	5210.02.062	5210.02.064	7110.02.062	7110.02.064	5110.02.062	5110.02.064	–	–
white 	5210.08.062	5210.08.064	7110.08.062	7110.08.064	5110.08.062	5110.08.064	5610.08.062	5610.08.064
yellow/black 	5210.17.062	5210.17.064	7110.17.062	7110.17.064	–	–	–	–

Stripe pieces 	PET – WT-5210		Polycarbonate – WT-7110		PVC – WT-5110		Soft aluminium – WT-5610	
	50 mm	75 mm	50 mm	75 mm	50 mm	75 mm	50 mm	75 mm
	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU
yellow 	5210.04.071	5210.04.073	7110.04.071	7110.04.073	5110.04.071	5110.04.073	5610.04.071	5610.04.073
red 	5210.01.071	5210.01.073	7110.01.071	7110.01.073	5110.01.071	5110.01.073	–	–
blue 	5210.10.071	5210.10.073	7110.10.071	7110.10.073	5110.10.071	5110.10.073	–	–
green 	5210.02.071	5210.02.073	7110.02.071	7110.02.073	5110.02.071	5110.02.073	–	–
white 	5210.08.071	5210.08.073	7110.08.071	7110.08.073	5110.08.071	5110.08.073	5610.08.071	5610.08.073
yellow/black 	5210.17.071	5210.17.073	7110.17.071	7110.17.073	–	–	–	–

Circle 	PET – WT-5210		Polycarbonate – WT-7110		PVC – WT-5110		Soft aluminium – WT-5610	
	50 mm	75 mm	50 mm	75 mm	50 mm	75 mm	50 mm	75 mm
	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU	25 Pieces/PU
yellow 	5210.04.069	5210.04.070	7110.04.069	7110.04.070	5110.04.069	5110.04.070	5610.04.069	5610.04.070
red 	5210.01.069	5210.01.070	7110.01.069	7110.01.070	5110.01.069	5110.01.070	–	–
blue 	5210.10.069	5210.10.070	7110.10.069	7110.10.070	5110.10.069	5110.10.070	–	–
green 	5210.02.069	5210.02.070	7110.02.069	7110.02.070	5110.02.069	5110.02.070	–	–
white 	5210.08.069	5210.08.070	7110.08.069	7110.08.070	5110.08.069	5110.08.070	5610.08.069	5610.08.070
yellow/black 	5210.17.069	5210.17.070	7110.17.069	7110.17.070	–	–	–	–



# Printed Storage location marker || WT-5210 / 7110

For the individual labelling of spaces



- Scratch-resistant print image
- High resistance and strong adhesion
- Suitable for smooth floors indoors

**Material:** PET (like tape WT-5229)

**Material thickness:** 0.2 mm

**Surface:** glossy

**Adhesive:** permanent acrylate adhesive

**Ground:**

for smooth and gap-free grounds

**Material:** polycarbonate

**Material thickness:** 0.7 mm

**Surface:** matt

**Adhesive:** permanent acrylate adhesive

**Ground:**

for smooth and gap-free grounds




Colour	PET – WT-5210				Polycarbonate – WT-7110			
	L-Pieces 50 mm	L-Pieces 75 mm	T-Pieces 50 mm	T-Pieces 75 mm	L-Pieces 50 mm	L-Pieces 75 mm	T-Pieces 50 mm	T-Pieces 75 mm
	Print area 90 x 40 mm	Print area 115 x 65 mm	Print area 140 x 40 mm	Print area 165 x 65 mm	Print area 90 x 40 mm	Print area 115 x 65 mm	Print area 140 x 40 mm	Print area 165 x 65 mm
	1 Pieces/PU	1 Pieces/PU	1 Pieces/PU	1 Pieces/PU	1 Pieces/PU	1 Pieces/PU	1 Pieces/PU	1 Pieces/PU
yellow	5210.04.B60	5210.04.B63	5210.04.B61	5210.04.B65	7110.04.B60	7110.04.B63	7110.04.B61	7110.04.B65
red	5210.01.B60	5210.01.B63	5210.01.B61	5210.01.B65	7110.01.B60	7110.01.B63	7110.01.B61	7110.01.B65
blue	5210.10.B60	5210.10.B63	5210.10.B61	5210.10.B65	7110.10.B60	7110.10.B63	7110.10.B61	7110.10.B65
green	5210.02.B60	5210.02.B63	5210.02.B61	5210.02.B65	7110.02.B60	7110.02.B63	7110.02.B61	7110.02.B65
white	5210.08.B60	5210.08.B63	5210.08.B61	5210.08.B65	7110.08.B60	7110.08.B63	7110.08.B61	7110.08.B65
black	5210.07.B60	5210.07.B63	5210.07.B61	5210.07.B65	7110.07.B60	7110.07.B63	7110.07.B61	7110.07.B65


When ordering with a barcode, please indicate which barcode system you are using.

## Dimension of storage location marker 50 mm and 75 mm

### Side width 50 mm

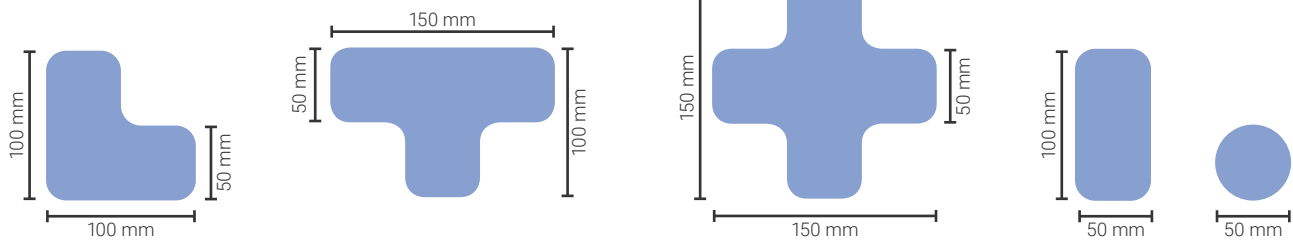

### Side width 75 mm

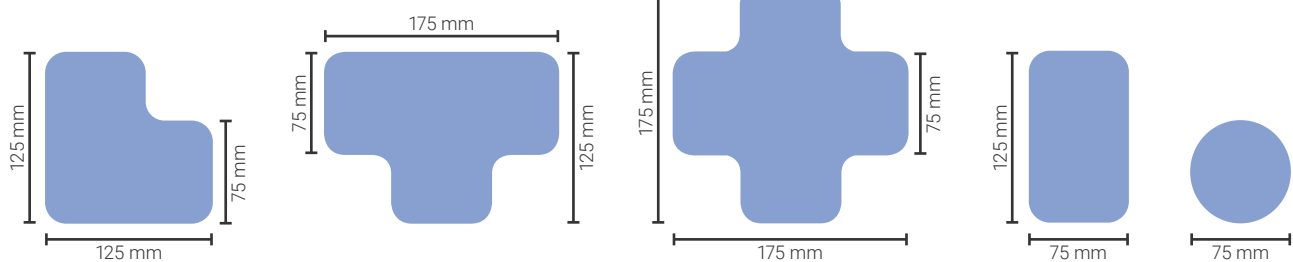

# Optical tracking

## For driverless vehicles /AGV's



### Optical tracking tape || WT-5128

This tape brings your goods to their destination



- | Fast bonding of track
- | Wear-resistant and high resistance with permanent load
- | Very good floor bond
- | Suitable for smooth floors indoors

**Material:** PVC

**Material thickness:** 0.5 mm


**Surface:** slightly glossy

**Adhesive:** permanent acrylate adhesive


**Application area:** indoor



Plan your track with the following elements:

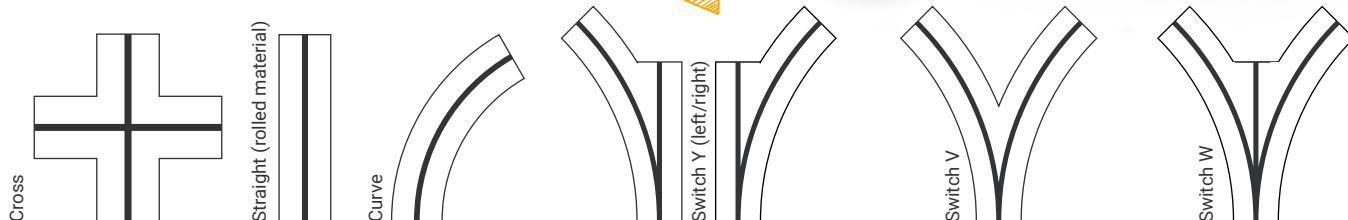

Create your own individual route network:

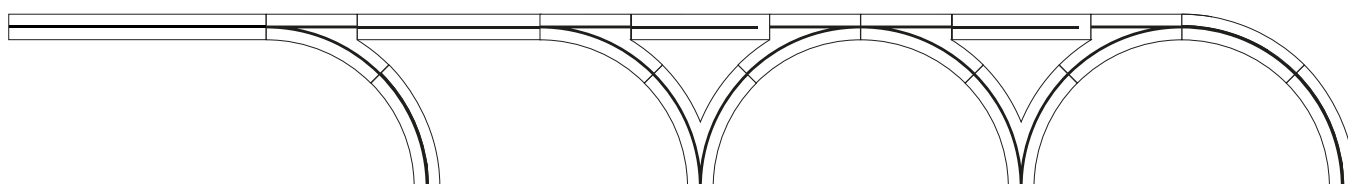

We produce your routes according to your request! Offers on request.

# Magnetic tracking

## For driverless vehicles /AGV's



### Magnetic tracking tape || WT-9228


This tape brings your goods to their destination



- Fast bonding of track nets
- Insensitive to dirt and unfavourable light conditions
- High flexibility and low costs for driving course changes
- Polarity and adhesion as required


#### North Pole | Standard

**Material:** magnetic tape 1.0 mm  
**Magnetisation:** North Pole  
**Adhesive:** acrylate adhesive for smooth and gap-free grounds  
**Overall thickness:** 1.2 mm  
**Application area:** indoor




#### South Pole | Standard

**Material:** magnetic tape 1.0 mm  
**Magnetisation:** South Pole  
**Adhesive:** acrylate adhesive for smooth and gap-free grounds  
**Overall thickness:** 1.2 mm  
**Application area:** indoor




#### North Pole | Extra strong

**Material:** magnetic tape 1.0 mm  
**Magnetisation:** North Pole  
**Adhesive:** stronger acrylate adhesive for difficult grounds  
**Overall thickness:** 1.5 mm  
**Application area:** indoor




#### South Pole | Extra strong


**Material:** magnetic tape 1.0 mm  
**Magnetisation:** South Pole  
**Adhesive:** stronger acrylate adhesive for difficult grounds  
**Overall thickness:** 1.5 mm  
**Application area:** indoor



#### Different curve elements:

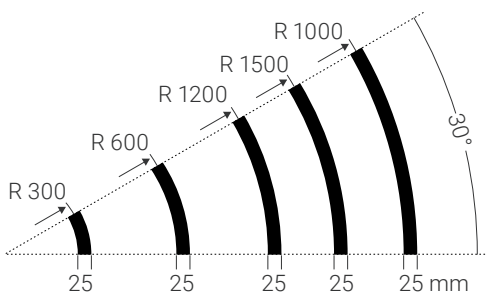

#### Route network example

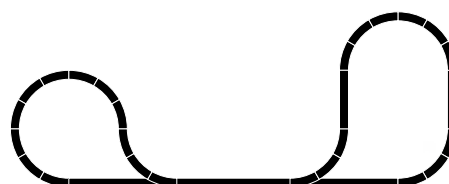

# Ground signs - Outdoor

## For self-adhesive marking



### Ground signs - Outdoor

Signs that are strongly connected to the ground



- | Easy and fast bonding
- | Wear-resistant and high resistance
- | Very good floor bond
- | Suitable for concrete paving and asphalt

**Material:** PVC

**Material thickness:** 1.3 mm

**Surface:** matt structured

**Slip resistance:** Anti-slip surface

**Adhesive:** permanent butyl adhesive

**Application area:** outside



### Primer No. 5


- | Primer No. 5 increases the adhesive strength of a tape on critical surfaces
- | ALWAYS required for outdoor use!



250 ml (0,75 m <sup>2</sup> )	1000 ml (3 m <sup>2</sup> )
3051.25.250	3051.25.1000

### Pressure roller

- | For pressing in profiled substrates
- | For bubble-free pressing



Variant short (1)	Variant long (2)
8002.11.032	8002.00.921

### Edge sealing

- | For sealing of edges
- | Prevents penetration of moisture



**Content:** 140 ml for approx. 10-15 m


Edge sealing	Item number
140 ml	6090.20.140

Laying instructions: for outdoor areas, prime the substrate with Primer No. 5 and seal the edges with edge seal



Charging station 1 - white

Height x width	Item number
400 x 400 mm	5415.08.1.04.B400
600 x 600 mm	5415.08.1.04.B600
800 x 800 mm	5415.08.1.04.B800




Charging station 2 - white

Height x width	Item number
400 x 400 mm	5415.08.1.01.B400
600 x 600 mm	5415.08.1.01.B600
800 x 800 mm	5415.08.1.01.B800



Parking space P - white

Height x width	Item number
400 x 400 mm	5415.08.1.06.B400
600 x 600 mm	5415.08.1.06.B600
800 x 800 mm	5415.08.1.06.B800



No stopping - white

Height x width	Item number
400 x 400 mm	5415.08.1.07.B400
600 x 600 mm	5415.08.1.07.B600
800 x 800 mm	5415.08.1.07.B800



Charging station 1 - blue

Height x width	Item number
400 x 400 mm	5415.10.1.04.B400
600 x 600 mm	5415.10.1.04.B600
800 x 800 mm	5415.10.1.04.B800



Charging station 2 - blue

Height x width	Item number
400 x 400 mm	5415.10.1.01.B400
600 x 600 mm	5415.10.1.01.B600
800 x 800 mm	5415.10.1.01.B800




Parking space P - blue

Height x width	Item number
400 x 400 mm	5415.10.1.06.B400
600 x 600 mm	5415.10.1.06.B600
800 x 800 mm	5415.10.1.06.B800



No stopping - blue

Height x width	Item number
400 x 400 mm	5415.10.1.07.B400
600 x 600 mm	5415.10.1.07.B600
800 x 800 mm	5415.10.1.07.B800



Bicycle - white

Height x width	Item number
400 x 400 mm	5415.08.1.05.B400
600 x 600 mm	5415.08.1.05.B600
800 x 800 mm	5415.08.1.05.B800



Family - white

Height x width	Item number
400 x 400 mm	5415.08.1.03.B400
600 x 600 mm	5415.08.1.03.B600
800 x 800 mm	5415.08.1.03.B800



Wheelchair users - white

Height x width	Item number
400 x 400 mm	5415.08.1.02.B400
600 x 600 mm	5415.08.1.02.B600
800 x 800 mm	5415.08.1.02.B800




Text and picto as desired - white

Height x width	Item number
400 x 400 mm	5415.08.1.99.B400
600 x 600 mm	5415.08.1.99.B600
800 x 800 mm	5415.08.1.99.B800



Bicycle - blue

Height x width	Item number
400 x 400 mm	5415.10.1.05.B400
600 x 600 mm	5415.10.1.05.B600
800 x 800 mm	5415.10.1.05.B800




Family - blue

Height x width	Item number
400 x 400 mm	5415.10.1.03.B400
600 x 600 mm	5415.10.1.03.B600
800 x 800 mm	5415.10.1.03.B800



Wheelchair users - blue

Height x width	Item number
400 x 400 mm	5415.10.1.02.B400
600 x 600 mm	5415.10.1.02.B600
800 x 800 mm	5415.10.1.02.B800



Text and picto as desired - blue

Height x width	Item number
400 x 400 mm	5415.10.1.99.B400
600 x 600 mm	5415.10.1.99.B600
800 x 800 mm	5415.10.1.99.B800

Other sizes, colours, motifs or individually printed for you - we are happy to advise you!

# Safety signs for the ground

## Ensure more safety in your company



### Safety signs



- | Quick installation
- | Extremely wear-resistant
- | Good resistance
- | PVC with slip resistance R10
- | Suitable for smooth grounds indoors and outdoors

**Material:** PC

**Material thickness:** 0.7 mm

**Surface:** semi-matt

**Slip class:** /

**Adhesive:** permanent acrylate adhesive

**Application area:** indoor

**Material:** PVC

**Material thickness:** 1.0 mm

**Surface:** matt

**Slip class:** R10

**Adhesive:** permanent acrylate adhesive

**Application area:** indoor and outdoor

**Installation instructions for outdoor areas: pre-treat the substrate with Primer No. 5. Cover the edges with edge sealing to prevent moisture penetration**

### Primer No. 5

- | Primer No. 5 increases the adhesion of a tape on critical surfaces
- | ALWAYS required for outdoor use!



250 ml (0,75 m²)	1000 ml (3 m²)
3051.25.250	3051.25.1000

### Edge sealing

- | For sealing of edges
- | Prevents penetration of moisture
- | Enough for up to 10-15 metres



Edge sealing	Item number
140 ml	6090.20.140



General warning sign (ASR A1.3)

Material	mm	Item number
PC Indoor	200	SW01.CA01.200
	400	SW01.CA01.400
	600	SW01.CA01.600
PVC Indoor	200	SW01.PA01.200
	400	SW01.PA01.400
	600	SW01.PA01.600
PVC Outside	200	SW01.PA04.200
	400	SW01.PA04.400
	600	SW01.PA04.600



Warning of forklifts (ASR A1.3)

Material	mm	Item number
PC Indoor	200	SW14.CA01.200
	400	SW14.CA01.400
	600	SW14.CA01.600
PVC Indoor	200	SW14.PA01.200
	400	SW14.PA01.400
	600	SW14.PA01.600
PVC Outside	200	SW14.PA04.200
	400	SW14.PA04.400
	600	SW14.PA04.600



Warning of explosive atmosphere (ASR A1.3)

Material	mm	Item number
PC Indoor	200	SW27.CA01.200
	400	SW27.CA01.400
	600	SW27.CA01.600
PVC Indoor	200	SW27.PA01.200
	400	SW27.PA01.400
	600	SW27.PA01.600
PVC Outside	200	SW27.PA04.200
	400	SW27.PA04.400
	600	SW27.PA04.600



Risk of slipping warning (ASR A1.3)

Material	mm	Item number
PC Indoor	200	SW11.CA01.200
	400	SW11.CA01.400
	600	SW11.CA01.600
PVC Indoor	200	SW11.PA01.200
	400	SW11.PA01.400
	600	SW11.PA01.600
PVC Outside	200	SW11.PA04.200
	400	SW11.PA04.400
	600	SW11.PA04.600



Prohibited for forklift trucks (ASR A1.3)

Material	Ø/mm	Item number
PC Indoor	200	SV01.CA01.200
	400	SV01.CA01.400
	600	SV01.CA01.600
PVC Indoor	200	SV01.PA01.200
	400	SV01.PA01.400
	600	SV01.PA01.600
PVC Outside	200	SV01.PA04.200
	400	SV01.PA04.400
	600	SV01.PA04.600




No pedestrians allowed (ASR A1.3)

Material	Ø/mm	Item number
PC Indoor	200	SV03.CA01.200
	400	SV03.CA01.400
	600	SV03.CA01.600
PVC Indoor	200	SV03.PA01.200
	400	SV03.PA01.400
	600	SV03.PA01.600
PVC Outside	200	SV03.PA04.200
	400	SV03.PA04.400
	600	SV03.PA04.600



No admission for unauthorised person (ASR A1.3)

Material	Ø/mm	Item number
PC Indoor	200	SV06.CA01.200
	400	SV06.CA01.400
	600	SV06.CA01.600
PVC Indoor	200	SV06.PA01.200
	400	SV06.PA01.400
	600	SV06.PA01.600
PVC Outside	200	SV06.PA04.200
	400	SV06.PA04.400
	600	SV06.PA04.600



Deposit or storage of items strictly forbidden (ASR A1.3)

Material	Ø/mm	Item number
PC Indoor	200	SV02.CA01.200
	400	SV02.CA01.400
	600	SV02.CA01.600
PVC Indoor	200	SV02.PA01.200
	400	SV02.PA01.400
	600	SV02.PA01.600
PVC Outside	200	SV02.PA04.200
	400	SV02.PA04.400
	600	SV02.PA04.600



General mandatory sign (ASR A1.3)

Material	Ø/mm	Item number
PC Indoor	200	SG17.CA01.200
	400	SG17.CA01.400
	600	SG17.CA01.600
PVC Indoor	200	SG17.PA01.200
	400	SG17.PA01.400
	600	SG17.PA01.600
PVC Outside	200	SG17.PA04.200
	400	SG17.PA04.400
	600	SG17.PA04.600



Use pedestrian walkway (ASR A1.3)

Material	Ø/mm	Item number
PC Indoor	200	SG16.CA01.200
	400	SG16.CA01.400
	600	SG16.CA01.600
PVC Indoor	200	SG16.PA01.200
	400	SG16.PA01.400
	600	SG16.PA01.600
PVC Outside	200	SG16.PA04.200
	400	SG16.PA04.400
	600	SG16.PA04.600



Use head protection (ASR A1.3)

Material	Ø/mm	Item number
PC Indoor	200	SG03.CA01.200
	400	SG03.CA01.400
	600	SG03.CA01.600
PVC Indoor	200	SG03.PA01.200
	400	SG03.PA01.400
	600	SG03.PA01.600
PVC Outside	200	SG03.PA04.200
	400	SG03.PA04.400
	600	SG03.PA04.600



Use foot protection (ASR A1.3)

Material	Ø/mm	Item number
PC Indoor	200	SG05.CA01.200
	400	SG05.CA01.400
	600	SG05.CA01.600
PVC Indoor	200	SG05.PA01.200
	400	SG05.PA01.400
	600	SG05.PA01.600
PVC Outside	200	SG05.PA04.200
	400	SG05.PA04.400
	600	SG05.PA04.600

Other sizes, colours, motifs or individually printed for you - we will be happy to advise you!

# Safety signs for the ground

## More safety with our ground signs



### Safety signs for passages and important areas



- | Extra high luminance **200/25 mcd/m<sup>2</sup>** (10min/60min) **according to DIN 67510 (Class C)**
- | Slip resistance R10
- | The right variant for every requirement, customisable upon request
- | Quick installation, good durability and extremely wear-resistant
- | Suitable for smooth floors indoors

**Material:** PVC  
**Material thickness:** 1.0 mm  
**Surface:** matt  
**Slip class:** R10  
**Adhesive:** permanent acrylate adhesive  
**Application area:** indoor  
extremely wear-resistant and robust

**Material:** PVC luminescent  
**Material thickness:** 1.2 mm  
**Surface:** matt  
**Slip class:** R10  
**Adhesive:** permanent acrylate adhesive  
**Application area:** indoor  
extremely wear-resistant and robust

**Material:** foil  
**Material thickness:** 0.3 mm  
**Surface:** glossy  
**Slip class:** R10  
**Adhesive:** permanent acrylate adhesive  
**Application area:** indoor  
extra thin and easy to clean

**Material:** foil luminescent  
**Material thickness:** 0.7 mm  
**Surface:** glossy  
**Slip class:** R10  
**Adhesive:** permanent acrylate adhesive  
**Application area:** indoor  
easy to clean

**You have a difficult ground or want a different material texture?  
Other versions on request - we happily advise you in choosing the right material!**





Fire extinguisher - semicircle\*

Motif number | **SH01**

Fire detector - semicircle\*

Motif number | **SH02**


Escape route - semicircle\*

Motif number | **SH03**


Escape route additional text - semicircle\*

Motif number | **SH04**

Access forbidden - semicircle

Motif number | **SH05**

Parking prohibited - semicircle

Motif number | **SH06**

Warning of voltage - semicircle

Motif number | **SH07**

Warning sign - semicircle

Motif number | **SH08**

Eye and foot protection - semicircle

Motif number | **SH10**

Use eye protection - semicircle

Motif number | **SH11**

Use foot protection - semicircle

Motif number | **SH12**

Warning of lift truck - semicircle

Motif number | **SH09**

Include the motif number with the item number for the appropriate material: **SH01.PA01.750** (Example for "Fire extinguisher" - PVC 750 x 375 mm)

Material	Width x length	Item number
PVC	750 x 375 mm	----.PA01.750
	900 x 450 mm	----.PA01.900
PVC photoluminescent	750 x 375 mm	----.FN33.750
	900 x 450 mm	----.FN33.900

\* available in photoluminescent!

Material	Width x length	Item number
Foil	750 x 375 mm	----.FK29.750
	900 x 450 mm	----.FK29.900
Foil photoluminescent	750 x 375 mm	----.FN23.750
	900 x 450 mm	----.FN23.900

\* available in photoluminescent!



Fire extinguisher - quarter circle\*

Motif number | **SD01**

Fire detector - quarter circle\*

Motif number | **SD02**

Parking prohibited - quarter circle

Motif number | **SD03**

Access forbidden - quarter circle

Motif number | **SD04**


Escape route door left - quarter circle\*

Motif number | **SD05**

Escape route door right - quarter circle\*

Motif number | **SD06**

Warning signs door opening - quarter circle

Motif number | **SD07**

Warning voltage - quarter circle

Motif number | **SD08**

Include the motif number with the item number for the appropriate material: **SD01.PA01.750** (Example for "Fire extinguisher" - PVC 750 x 750 mm)

Material	Width x length	Item number
PVC	750 x 750 mm	----.PA01.750
	900 x 900 mm	----.PA01.900
PVC photoluminescent	750 x 750 mm	----.FN33.750
	900 x 900 mm	----.FN33.900

\* available in photoluminescent!

Material	Width x length	Item number
Foil	750 x 750 mm	----.FK29.750
	900 x 900 mm	----.FK29.900
Foil photoluminescent	750 x 750 mm	----.FN23.750
	900 x 900 mm	----.FN23.900

\* available in photoluminescent!





# Anti-slip solutions

Anti-slip tapes  
Anti-slip strips  
Stair nosing profiles

# Anti-slip solutions

Prevent slipping and falling accidents safely!



**i** Floor coverings are subdivided into 5 groups, with coverings with group R9 meet the lowest requirements for anti-slip properties and those with group R13 meet the highest requirements for anti-slip properties. **ASR A1.5/1,2**



**Group R9**  
low friction coefficient  
non-slip up to 3° - 10° inclination  
e.g. stairs, entrance area



**Group R10**  
normal coefficient of static friction  
non-slip up to 10° - 19° inclination  
e.g. sanitary rooms



**Group R11**  
increased static friction coefficient  
non-slip up to 19° - 27° inclination  
e.g. vehicle repair, beverage filling



**Group R12**  
high coefficient of static friction  
non-slip up to 27° - 35° inclination  
e.g. cold storage rooms, waste watertreatment plants



**Group R13**  
very high coefficient of static friction  
non-slip up to inclination > 35°  
e.g. flow-through tank

## Anti-slip tape – medium || WT-5411

The self-adhesive tape for versatile use



- | Large variety of colours and individual widths possible
- | Slip resistance R13
- | For medium to high loads
- | Suitable for smooth grounds indoors and outdoors

**Material:** mineral granulation embedded in synthetic resin

**Material thickness:** 0.9 mm ± 0.1 mm

**Surface:** medium

**Slip class:** R13

**Adhesive:** permanent acrylate adhesive

**Application area:** indoor and **weather-protected** outdoor area



Colour	25 mm x 6 m	25 mm x 18 m	50 mm x 6 m	50 mm x 18 m	75 mm x 6 m	75 mm x 18 m	100 mm x 6 m	100 mm x 18 m
yellow	5411.04.1025	5411.04.0025	5411.04.1050	5411.04.0050	5411.04.1075	5411.04.0075	5411.04.1100	5411.04.0100
yellow public	5411.47.1025	5411.47.0025	5411.47.1050	5411.47.0050	5411.47.1075	5411.47.0075	5411.47.1100	5411.47.0100
black	5411.07.1025	5411.07.0025	5411.07.1050	5411.07.0050	5411.07.1075	5411.07.0075	5411.07.1100	5411.07.0100
white	5411.08.1025	5411.08.0025	5411.08.1050	5411.08.0050	5411.08.1075	5411.08.0075	5411.08.1100	5411.08.0100
blue	5411.10.1025	5411.10.0025	5411.10.1050	5411.10.0050	5411.10.1075	5411.10.0075	5411.10.1100	5411.10.0100
light blue	5411.03.1025	5411.03.0025	5411.03.1050	5411.03.0050	5411.03.1075	5411.03.0075	5411.03.1100	5411.03.0100
green	5411.02.1025	5411.02.0025	5411.02.1050	5411.02.0050	5411.02.1075	5411.02.0075	5411.02.1100	5411.02.0100
brown	5411.05.1025	5411.05.0025	5411.05.1050	5411.05.0050	5411.05.1075	5411.05.0075	5411.05.1100	5411.05.0100
red	5411.01.1025	5411.01.0025	5411.01.1050	5411.01.0050	5411.01.1075	5411.01.0075	5411.01.1100	5411.01.0100
neon orange	5411.12.1025	5411.12.0025	5411.12.1050	5411.12.0050	5411.12.1075	5411.12.0075	5411.12.1100	5411.12.0100
transparent	5411.09.1025	5411.09.0025	5411.09.1050	5411.09.0050	5411.09.1075	5411.09.0075	5411.09.1100	5411.09.0100
photoluminescent	5416.04.1025	5416.04.0025	5416.04.1050	5416.04.0050	5416.04.1075	5416.04.0075	5416.04.1100	5416.04.0100
grey	5411.06.1025	5411.06.0025	5411.06.1050	5411.06.0050	5411.06.1075	5411.06.0075	5411.06.1100	5411.06.0100
yellow/black	5411.17.1025	5411.17.0025	5411.17.1050	5411.17.0050	5411.17.1075	5411.17.0075	5411.17.1100	5411.17.0100

**Laying instructions:** outside, pre-treat the substrate with Primer No. 5

## Anti-slip tape – strips || WT-5411

The optimal solution for steps and stairs



- Slip resistance R13
- For medium to high loads
- Suitable for smooth grounds indoors and outdoors

**Material:** mineral granulation embedded in synthetic resin


**Material thickness:** 0.9 ± 0.1 mm

**Surface:** medium

**Slip class:** R13

**Adhesive:** permanent acrylate adhesive

**Application area:** indoor and weather-protected outdoor area

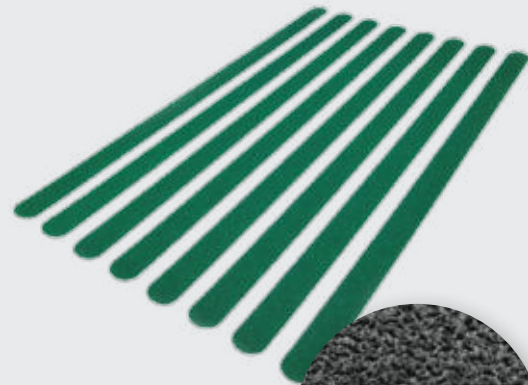

More colours  
on request

Colour	640 mm x 30 mm 8 strips/PU
yellow public	ST11.002147.8.0364
black	ST11.002919.8.0364
blue	ST11.002515.8.0364
green	ST11.002618.8.0364
red	ST11.002303.8.0364
grey	ST11.002710.8.0364
photoluminescent	ST11.002027.8.0364



Laying instructions: outside, pre-treat the substrate with Primer No. 5

## Anti-slip tape – rough || WT-5412

The self-adhesive tape with rough grain



- Slip resistance R13
- Ideal for high pedestrian frequency or coarse soiling
- Suitable for smooth grounds indoors and outdoors

**Material:** mineral granulation embedded in synthetic resin


**Material thickness:** 1.5 mm ± 0.1 mm

**Surface:** rough

**Slip class:** R13

**Adhesive:** permanent acrylate adhesive

**Application area:** indoor and **weather-protected** outdoor area

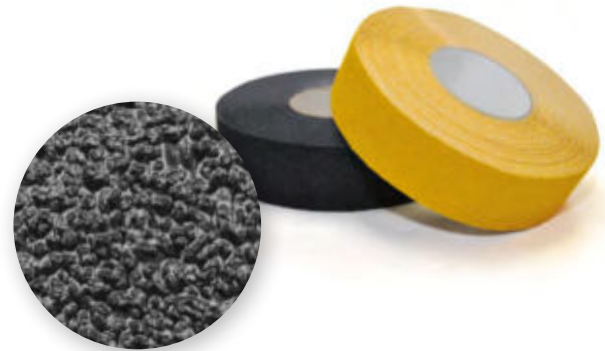

Colour	25 mm x 6 m	25 mm x 18 m	50 mm x 6 m	50 mm x 18 m	75 mm x 6 m	75 mm x 18 m	100 mm x 6 m	100 mm x 18 m
yellow	5412.04.1025	5412.04.0025	5412.04.1050	5412.04.0050	5412.04.1075	5412.04.0075	5412.04.1100	5412.04.0100
black	5412.07.1025	5412.07.0025	5412.07.1050	5412.07.0050	5412.07.1075	5412.07.0075	5412.07.1100	5412.07.0100

Laying instructions: outside, pre-treat the substrate with Primer No. 5

### Primer No. 5

- Primer No. 5 increases the adhesive strength of a tape on critical surfaces
- ALWAYS required for outdoor use!



250 ml (0,75 m <sup>2</sup> )	1000 ml (3 m <sup>2</sup> )
3051.25.250	3051.25.1000

### Edge sealing


- For sealing of edges
- Prevents penetration of moisture
- Enough for up to 10-15 metres



Edge sealing	Item number
140 ml	6090.20.140

# Stair nosing profiles

## The multitalented protection for your stairs

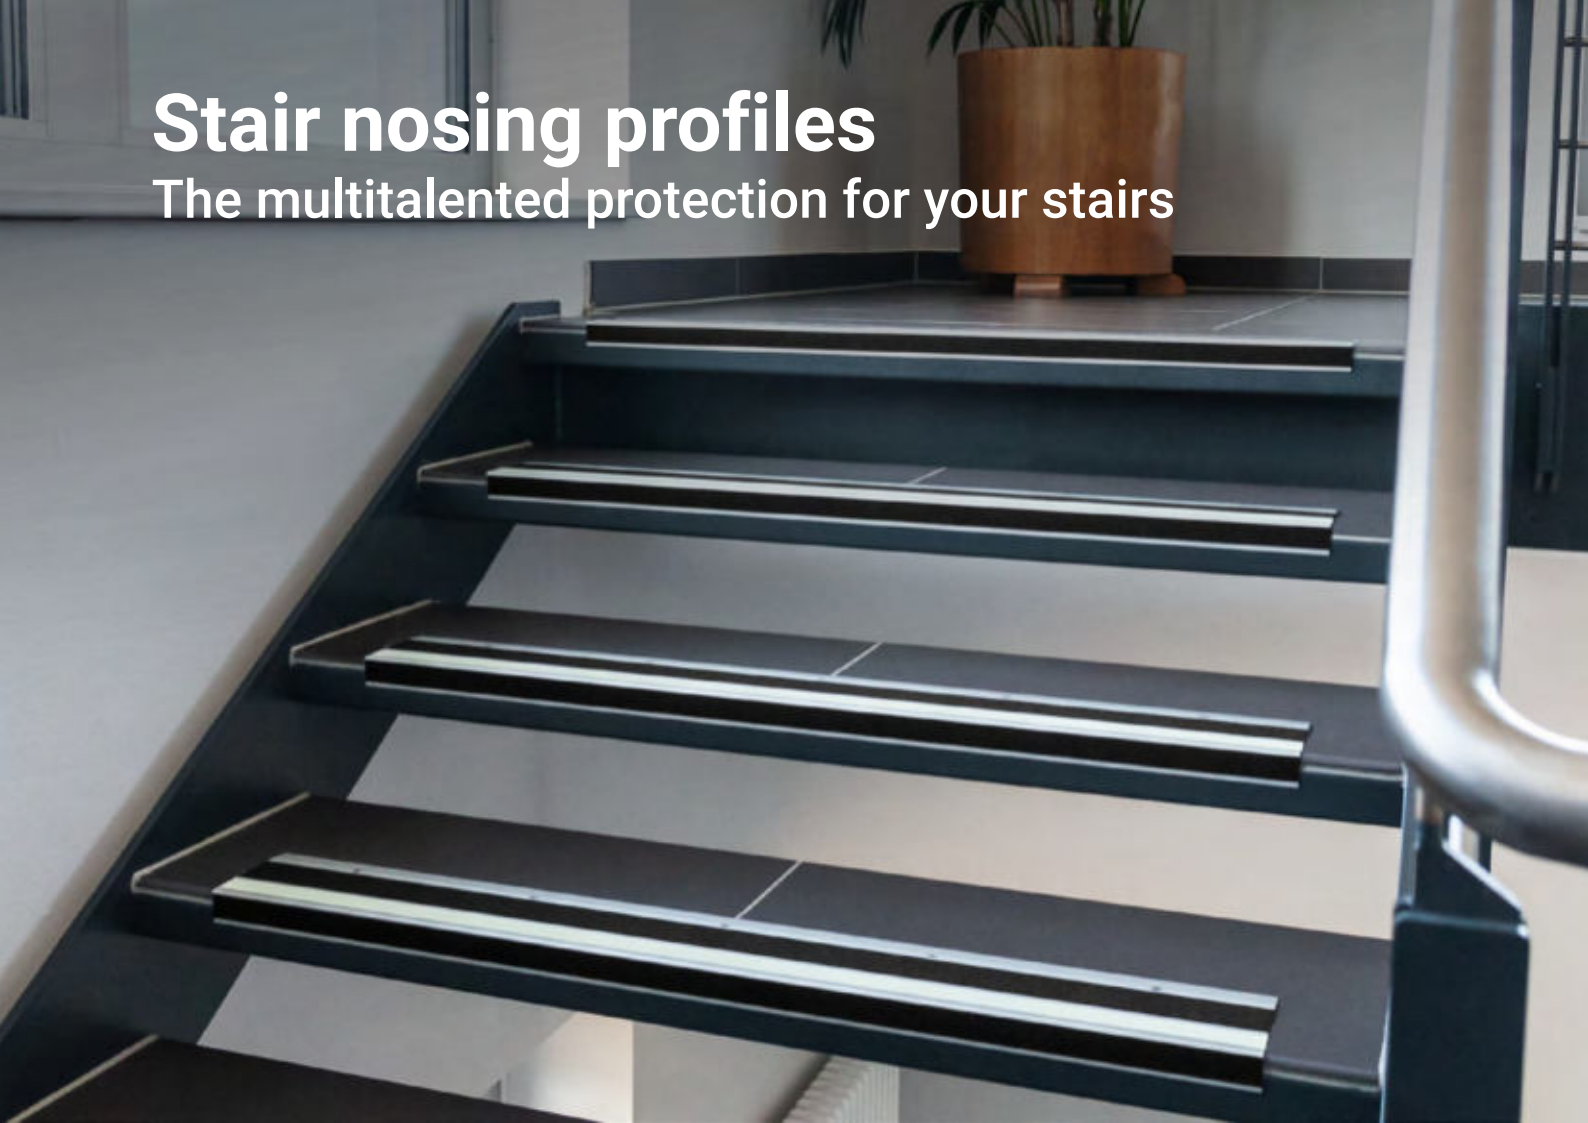

### Anti-slip plate || WT-5408


#### Thin Line

- | Slip resistance R10 or R13
- | Wear-resistant and slip-proof, even for high frequencies
- | Screwable or self-adhesive
- | For difficult, uneven, porous or dirty surfaces
- | Suitable for indoor and outdoor



**Material:** aluminium composite  
**Colour:** silver  
**Drill:** yes, concealed  $\varnothing$  5 mm  
**Installation:** screwable on or self-adhesive  
**Design:** 100 mm wide  
**Delivery:** self-adhesive  
**Individual length:** possible

#### Design wide || Tread 100 mm



#### Surface **Medium** R13

No.	Colour	Length 600 mm	Length 800 mm	Length 1000 mm
01	black	5408.07.100-600	5408.07.100-800	5408.07.100-1000
02	yellow/black	5408.17.100-600	5408.17.100-800	5408.17.100-1000
03	public	5408.47.100-600	5408.47.100-800	5408.47.100-1000
04	yellow	-	-	-
05	photoluminescent/black	5408.17FN.100-600	5408.17FN.100-800	5408.17FN.100-1000
06	yellow/black & „individual“	5408.99.100-600	5408.99.100-800	5408.99.100-1000
07	photoluminescent/black & „individual“	5408.99FN.100-600	5408.99FN.100-800	5408.99FN.100-1000

#### Surface **Soft** R10 (only for indoor use)

Length 600 mm	Length 800 mm	Length 1000 mm
5408.2.07.100-600	5408.2.07.100-800	5408.2.07.100-1000
5408.2.17.100-600	5408.2.17.100-800	5408.2.17.100-1000
-	-	-
5408.2.04.100-600	5408.2.04.100-800	5408.2.04.100-1000
5408.2.17FN.100-600	5408.2.17FN.100-800	5408.2.17FN.100-1000
5408.2.99.100-600	5408.2.99.100-800	5408.2.99.100-1000
5408.2.99FN.100-600	5408.2.99FN.100-800	5408.2.99FN.100-1000

## Anti-slip stair nosing profile || WT-5409


### Thin Line

- | Slip resistance R10 or R13
- | Wear-resistant and slip-proof, even for high frequencies
- | For difficult, uneven, porous or dirty surfaces
- | Suitable for indoor use on stairs, ramps, landings, ladders, etc.
- | Individual anti-slip insert according to your request



**Material:** aluminium composite  
**Colour:** silver  
**Drill:** yes, concealed  $\varnothing$  5 mm  
**Installation:** screwable or self-adhesive  
**Design:** narrow and wide  
**Delivery:** self-adhesive  
**Individual length:** on request

### Design narrow || tread 50 mm

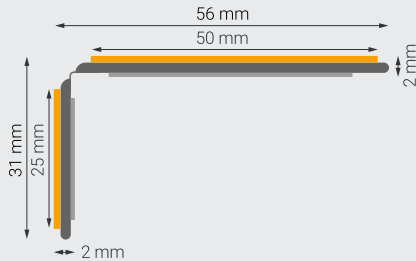

Surface **Medium R13**


No.	Colour	Length 600 mm	Length 800 mm	Length 1000 mm
01	black	5409.07.050-600	5409.07.050-800	5409.07.050-1000
02	yellow/black	5409.17.050-600	5409.17.050-800	5409.17.050-1000
03	yellow public	5409.47.050-600	5409.47.050-800	5409.47.050-1000
04	yellow	-	-	-
05	photoluminescent/black	5409.17FN.050-600	5409.17FN.050-800	5409.17FN.050-1000
06	black & photoluminescent black	5409.7297.050-600	5409.7297.050-800	5409.7297.050-1000
07	black & photoluminescent photoluminescent	5409.729.050-600	5409.729.050-800	5409.729.050-1000
08	black & yellow	5409.0704.050-600	5409.0704.050-800	5409.0704.050-1000

Surface **Soft R10 (only for indoor use)**

Length 600 mm	Length 800 mm	Length 1000 mm
5409.2.07.050-600	5409.2.07.050-800	5409.2.07.050-1000
5409.2.17.050-600	5409.2.17.050-800	5409.2.17.050-1000
-	-	-
5409.2.04.050-600	5409.2.04.050-800	5409.2.04.050-1000
5409.2.17FN.050-600	5409.2.17FN.050-800	5409.2.17FN.050-1000
5409.2.7297.050-600	5409.2.7297.050-800	5409.2.7297.050-1000
5409.2.729.050-600	5409.2.729.050-800	5409.2.729.050-1000
5409.2.0704.050-600	5409.2.0704.050-800	5409.2.0704.050-1000

## Anti-slip stair nosing profile || WT-5409

### Design wide || tread 100 mm

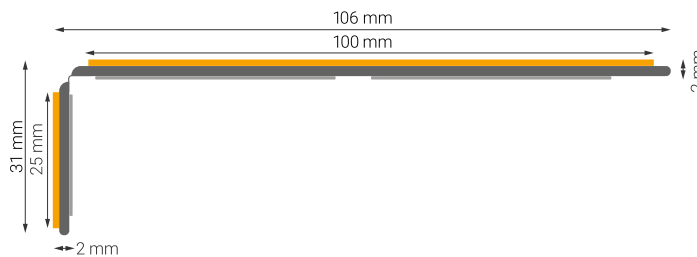

Surface **Medium R13**

No.	Colour	Length 600 mm	Length 800 mm	Length 1000 mm
01	black	5409.07.100-600	5409.07.100-800	5409.07.100-1000
02	yellow/black	5409.17.100-600	5409.17.100-800	5409.17.100-1000
03	yellow	-	-	-
04	yellow public	5409.47.100-600	5409.47.100-800	5409.47.100-1000
05	photoluminescent/black	5409.17FN.100-600	5409.17FN.100-800	5409.17FN.100-1000
06	black & photoluminescent black	5409.7297.100-600	5409.7297.100-800	5409.7297.100-1000
07	black & photoluminescent photoluminescent	5409.729.100-600	5409.729.100-800	5409.729.100-1000
08	yellow/black & 'individual'	5409.99.100-600	5409.99.100-800	5409.99.100-1000
09	photoluminescent & black + 'individual'	5409.99FN.100-600	5409.99FN.100-800	5409.99FN.100-1000
10	black & yellow	5409.0704.100-600	5409.0704.100-800	5409.0704.100-1000
11	black & yellow yellow	5409.74.100-600	5409.74.100-800	5409.74.100-1000

Surface **Soft R10 (only for indoor use)**

Length 600 mm	Length 800 mm	Length 1000 mm
5409.2.07.100-600	5409.2.07.100-800	5409.2.07.100-1000
5409.2.17.100-600	5409.2.17.100-800	5409.2.17.100-1000
5409.2.04.100-600	5409.2.04.100-800	5409.2.04.100-1000
-	-	-
5409.2.17FN.100-600	5409.2.17FN.100-800	5409.2.17FN.100-1000
5409.2.7297.100-600	5409.2.7297.100-800	5409.2.7297.100-1000
5409.2.729.100-600	5409.2.729.100-800	5409.2.729.100-1000
5409.2.99.100-600	5409.2.99.100-800	5409.2.99.100-1000
5409.2.99FN.100-600	5409.2.99FN.100-800	5409.2.99FN.100-1000
5409.2.0704.100-600	5409.2.0704.100-800	5409.2.0704.100-1000
5409.2.74.100-600	5409.2.74.100-800	5409.2.74.100-1000

# Anti-slip stair nosing profile || WT-5407



## General Line



- Anti-slip class R10 or R13
- Indoor and outdoor applications
- Wear-resistant and slip-proof, even for high frequencies
- Individual anti-slip insert according to your request

**Material:** aluminium  
**Colour:** silver anodised  
**Drill:** countersunk  $\varnothing$  5,5 mm  
**Installation:** screwable  
**Design:** narrow and wide  
**Delivery:** incl. screws and dowels  
**Individual length:** on request

### Design narrow || tread 90 mm

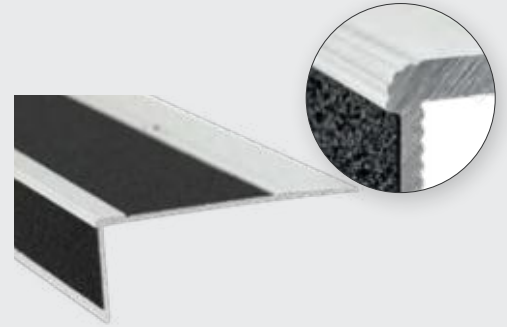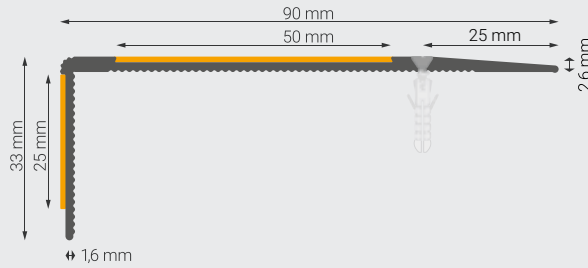

Surface **Medium R13**



No.	Colour	Length 600 mm	Length 800 mm	Length 1000 mm
01	black	5407.07.090-600	5407.07.090-800	5407.07.090-1000
02	yellow/black	5407.17.090-600	5407.17.090-800	5407.17.090-1000
03	yellow public	5407.47.090-600	5407.47.090-800	5407.47.090-1000
04	yellow	-	-	-
05	photoluminescent/black	5407.17NF.090-600	5407.17NF.090-800	5407.17NF.090-1000
06	black & yellow	5407.0704.090-600	5407.0704.090-800	5407.0704.090-1000
07	grey	5407.06.090-600	5407.06.090-800	5407.06.090-1000

Surface **Soft R10 (only for indoor use)**

Length 600 mm	Length 800 mm	Length 1000 mm
5407.2.07.090-600	5407.2.07.090-800	5407.2.07.090-1000
5407.2.17.090-600	5407.2.17.090-800	5407.2.17.090-1000
-	-	-
5407.2.04.090-600	5407.2.04.090-800	5407.2.04.090-1000
5407.2.17NF.090-600	5407.2.17NF.090-800	5407.2.17NF.090-1000
5407.2.0704.090-600	5407.2.0704.090-800	5407.2.0704.090-1000
5407.2.06.090-600	5407.2.06.090-800	5407.2.06.090-1000



### Design wide || tread 120 mm

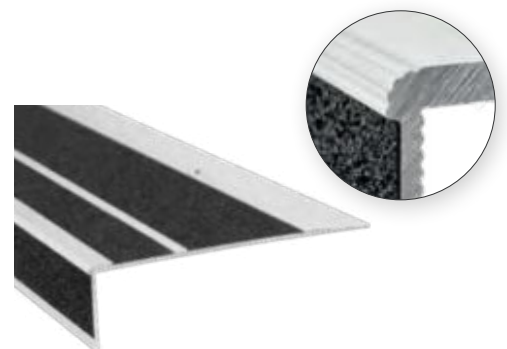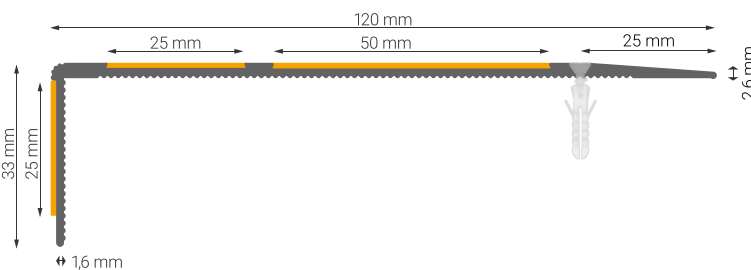

Surface **Medium R13**

No.	Colour	Length 600 mm	Length 800 mm	Length 1000 mm
01	black	5407.07.120-600	5407.07.120-800	5407.07.120-1000
02	black & photoluminescent photoluminescent	5407.729.120-600	5407.729.120-800	5407.729.120-1000
03	black & photoluminescent black	5407.7297.120-600	5407.7297.120-800	5407.7297.120-1000
04	black & yellow black	5407.747.120-600	5407.747.120-800	5407.747.120-1000
05	black & yellow yellow	5407.74.120-600	5407.74.120-800	5407.74.120-1000

Surface **Soft R10 (only for indoor use)**

Length 600 mm	Length 800 mm	Length 1000 mm
5407.2.07.120-600	5407.2.07.120-800	5407.2.07.120-1000
5407.2.729.120-600	5407.2.729.120-800	5407.2.729.120-1000
5407.2.7297.120-600	5407.2.7297.120-800	5407.2.7297.120-1000
5407.2.747.120-600	5407.2.747.120-800	5407.2.747.120-1000
5407.2.74.120-600	5407.2.74.120-800	5407.2.74.120-1000



## Floor marking tape with anti-slip surface plus || WT-5420

The extra thin tape for high demands R12



- | Suitable for wet and dry areas
- | Slip resistance R12 / Class C
- | Extra thin and tear-resistant
- | Suitable for smooth floors indoors
- | Strips excellently suitable for public baths and showers

**Material:** plastic foil

**Material thickness:** 0.4 mm

**Surface:** glossy

**Slip class:** R12 / Class C


**Adhesive:** permanent or removable acrylate adhesive

**Application area:** indoor



Colour	Permanent adhesive			Removable adhesive			Permanent adhesive	Removable adhesive
	50 mm x 10 m	75 mm x 10 m	100 mm x 10 m	50 mm x 10 m	75 mm x 10 m	100 mm x 10 m	strips 640 mm x 30 mm	strips 640 mm x 30 mm
yellow	5420.04.050-10	5420.04.075-10	5420.04.100-10	5420.1.04.050-10	5420.1.04.075-10	5420.1.04.100-10	5420.04.030-ST	5420.1.04.030-ST
red	5420.01.050-10	5420.01.075-10	5420.01.100-10	5420.1.01.050-10	5420.1.01.075-10	5420.1.01.100-10	5420.01.030-ST	5420.1.01.030-ST
blue	5420.10.050-10	5420.10.075-10	5420.10.100-10	5420.1.10.050-10	5420.1.10.075-10	5420.1.10.100-10	5420.10.030-ST	5420.1.10.030-ST
green	5420.02.050-10	5420.02.075-10	5420.02.100-10	5420.1.02.050-10	5420.1.02.075-10	5420.1.02.100-10	5420.02.030-ST	5420.1.02.030-ST
orange	5420.12.050-10	5420.12.075-10	5420.12.100-10	5420.1.12.050-10	5420.1.12.075-10	5420.1.12.100-10	5420.12.030-ST	5420.1.12.030-ST
white	5420.08.050-10	5420.08.075-10	5420.08.100-10	5420.1.08.050-10	5420.1.08.075-10	5420.1.08.100-10	5420.08.030-ST	5420.1.08.030-ST
black	5420.07.050-10	5420.07.075-10	5420.07.100-10	5420.1.07.050-10	5420.1.07.075-10	5420.1.07.100-10	5420.07.030-ST	5420.1.07.030-ST
yellow/black	5420.17.050-10	5420.17.075-10	5420.17.100-10	5420.1.17.050-10	5420.1.17.075-10	5420.1.17.100-10	5420.17.030-ST	5420.1.17.030-ST
red/white	5420.18.050-10	5420.18.075-10	5420.18.100-10	5420.1.18.050-10	5420.1.18.075-10	5420.1.18.100-10	5420.18.030-ST	5420.1.18.030-ST
black/white	5420.20.050-10	5420.20.075-10	5420.20.100-10	5420.1.20.050-10	5420.1.20.075-10	5420.1.20.100-10	5420.20.030-ST	5420.1.20.030-ST

Other sizes, colours, forms or an individual contour cut - we happily advise you on your exclusive solution!

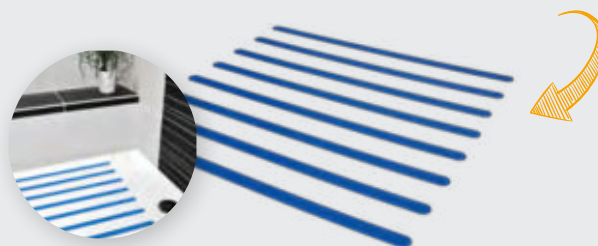

## Anti-slip tape – conformable || WT-5414

The malleable tape with rough grain



- | Slip resistance R13
- | Particularly for uneven surfaces
- | Adapts to the profile of the substrate
- | Suitable for indoors and outdoors

**Material:** mineral granulation embedded in synthetic resin

**Material thickness:** 0.78 mm

**Surface:** rough

**Slip class:** R13

**Adhesive:** permanent acrylate adhesive

**Application area:** indoor and **weather-protected** outdoor area

Colour	25 mm x 6 m	25 mm x 18 m	50 mm x 6 m	50 mm x 18 m
yellow	5414.04.1025	5414.04.0025	5414.04.1050	5414.04.0050
yellow/black	5414.17.1025	5414.17.0025	5414.17.1050	5414.17.0050
black	5414.07.1025	5414.07.0025	5414.07.1050	5414.07.0050

Laying instructions: outside, pre-treat the substrate with Primer No. 5





**E 09**

**01-24**



## Signs and marks

- | Reflective marking
- | Photoluminescent marking
- | Escape sign
- | Fire protection
- | Prohibition sign
- | Mandatory sign
- | Warning sign
- | Block storage, ceiling and flag signs
- | Shelf lines, wall signs
- | Ceiling hangers
- | Labels
- | Accessories

# Reflective marking

## Reflective markings RA1 and RA2



### Truck and trailer contour marking || WT-5218



- | Certified according to ECE 104 Class C
- | Ideal marking for trucks, tankers, fixed bodies and tarpaulins
- | Excellent visibility over long distances
- | Self-adhesive and car wash proof

**Material:** polypropylene





**Material thickness:** 0.2 mm

**Surface:** reflective

**Temperature range:** -40° C to +82° C (bonded to aluminium)

**Application area:** indoor and outdoor



Version	Colour	50 mm x 12,5 m	50 mm x 50 m
 <b>Fixed structure</b> Roll	yellow	5218.104.50-12	5218.104.50-50
	red	5218.101.50-12	5218.101.50-50
	white	5218.108.50-12	5218.108.50-50
 <b>Tanker</b> Roll with Sticker	yellow	5218.204.50-12	5218.204.50-50
	red	5218.201.50-12	5218.201.50-50
	white	5218.208.50-12	5218.208.50-50
 <b>Tarpaulins</b> Roll	yellow	5218.304.50-12	5218.304.50-50
	red	5218.301.50-12	5218.301.50-50
	white	5218.308.50-12	5218.308.50-50
 <b>Tarpaulins</b> Roll with Sticker	yellow	5218.404.50-12	5218.404.50-50
	red	5218.401.50-12	5218.401.50-50
	white	5218.408.50-12	5218.408.50-50



## Vehicle warning marking || WT-5219



- | Certified according to DIN 30710
- | Ideal marking of vehicles with special rights
- | Class RA2, structure C
- | Self-adhesive, weather resistant and car wash proof

**Material:** polypropylene

**Material thickness:** 0.2 mm

**Surface:** reflective

**Temperature range:** -40° C to +82° C (bonded to aluminium)

**Application area:** outdoor



	Colour	141 mm x 1 m	141 mm x 4,5 m	141 mm x 9 m	282 mm x 1 m	282 mm x 4,5 m	282 mm x 9 m
<b>Passenger car warning markings</b> • highly flexible, prismatic • Class RA2, structure C	red/white	5219.S18.141-mL 1 m pointing left	5219.S18.141-4 every 1 roll pointing left and pointing right	5219.S18.141-9 every 1 roll pointing left and pointing right	5219.S18.282-mL 1 m pointing left	5219.S18.282-4 every 1 roll pointing left and pointing right	5219.S18.282-9 every 1 roll pointing left and pointing right
		5219.S18.141-mR 1 m pointing right			5219.S18.282-mR 1 m pointing right		

## Container warning marking || WT-5219



- | Conforms to DIN 67520 and DIN 6171
- | Reflective marking for containers, waste containers and swap bodies
- | Class RA2, structure C
- | Self-adhesive, weather resistant and car wash proof

**Material:** polypropylene

**Material thickness:** 0.4 mm

**Surface:** reflective

**Temperature range:** -40° C to +82° C (bonded to aluminium)

**Application area:** outdoor



	Colour	141 mm x 705 mm	141 mm x 705 mm
<b>Container warning marking</b> • highly reflective • Class RA2, structure C	red/white	5219.Set.141 2 strips per set 1x pointing left 1x pointing right	5219.SRL.141 8 strips per set 4x pointing left 4x pointing right

## Reflective warning marking tape || WT-5219



- | According to DIN 4844
- | For noticeable marking of danger points
- | Class RA1, structure A or class RA2, structure B
- | Universal adhesive for use on a wide variety of surfaces

**Material:** polypropylene

**Material thickness:** 0.4 mm

**Surface:** reflective

**Temperature range:** -40° C to +82° C (bonded to aluminium)


**Application area:** indoor and outdoor



	Colour	Direction	50 mm x 5 m	50 mm x 25 m	100 mm x 5 m	100 mm x 25 m
<b>Reflective - High Intensity Grade</b> • for hazardous locations with high visibility requirements • Class RA2, structure B	yellow/black	pointing left	5219.R17.050-5L	5219.R17.050-25L	5219.R17.100-5L	5219.R17.100-25L
		pointing right	5219.R17.050-5R	5219.R17.050-25R	5219.R17.100-5R	5219.R17.100-25R
	red/white	pointing left	5219.R18.050-5L	5219.R18.050-25L	5219.R18.100-5L	5219.R18.100-25L
		pointing right	5219.R18.050-5R	5219.R18.050-25R	5219.R18.100-5R	5219.R18.100-25R
<b>Reflective - Commercial Grade</b> • for less dangerous areas • Class RA1, structure A	yellow/black	pointing left	5219.T17.050-5L	5219.T17.050-25L	5219.T17.100-5L	5219.T17.100-25L
		pointing right	5219.T17.050-5R	5219.T17.050-25R	5219.T17.100-5R	5219.T17.100-25R
	red/white	pointing left	5219.T18.050-5L	5219.T18.050-25L	5219.T18.100-5L	5219.T18.100-25L
		pointing right	5219.T18.050-5R	5219.T18.050-25R	5219.T18.100-5R	5219.T18.100-25R

# Photoluminescent marking

Ensure more safety in your company

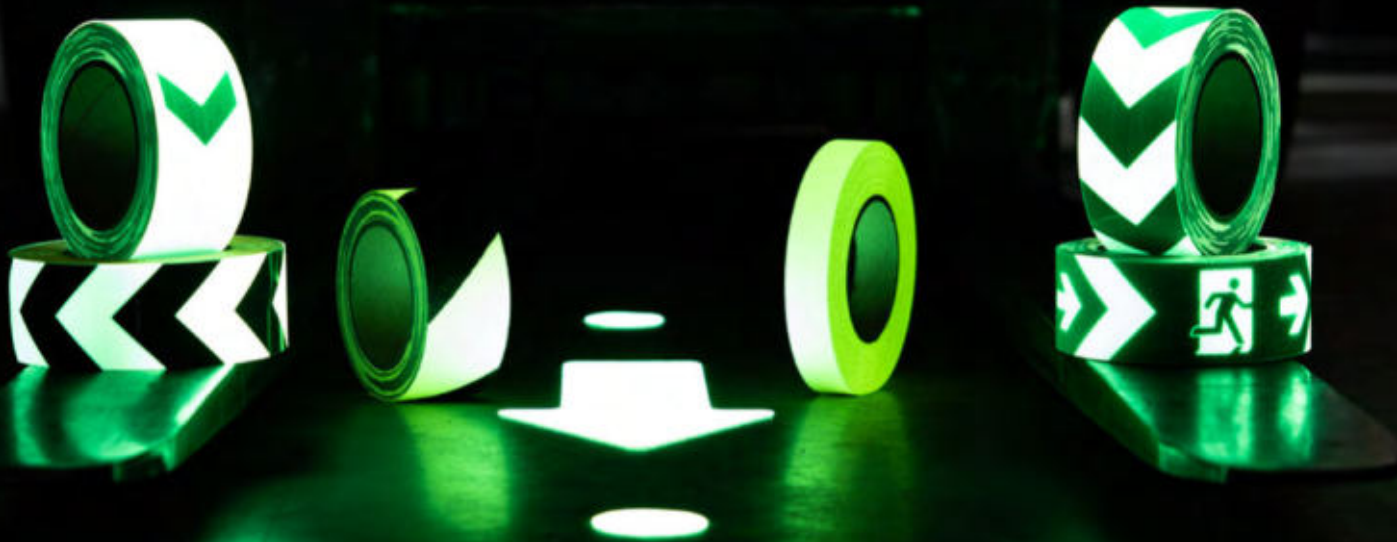

## High luminescence

Photoluminescent 200/25 mcd/m<sup>2</sup> - Class C

ASR A3.4 / 7 at least prescribes: 80/12 mcd/m<sup>2</sup>

### Photoluminescent marking || WT-5127

The ideal marker for glow in the dark

- | Self-adhesive guide mark for wall and floor
- | Extra high luminance **200/25 mcd/m<sup>2</sup> according to DIN 67510 (class C)**
- | Current-independent, maintenance-free and fail-safe
- | The right variant for every requirement

**Material:** PVC

**Material thickness:** 0.6 mm

**Surface:** glossy

**Slip class:** /

**Adhesive:** permanent acrylate adhesive

**Application area:** indoor

**Material:** PVC with anti-slip surface

**Material thickness:** 1.0 mm

**Surface:** matt

**Slip class:** R10

**Adhesive:** permanent acrylate adhesive

**Application area:** indoor



#### Minimum luminance

Class	According to 10 minutes	According to 60 minutes
A	23 mcd/m <sup>2</sup>	3 mcd/m <sup>2</sup>
B	50 mcd/m <sup>2</sup>	7 mcd/m <sup>2</sup>
C	140 mcd/m <sup>2</sup>	20 mcd/m <sup>2</sup>
D	260 mcd/m <sup>2</sup>	35 mcd/m <sup>2</sup>

mcd = Millicandela

You have a difficult ground or want a different material texture?

Other versions on request - we happily advise you in choosing the right material!



Marking tape

Material	Width x length	Item number
PVC <i>smooth</i>	25 mm x 10 m	5127.29.025
	50 mm x 10 m	5127.29.050
	75 mm x 10 m	5127.29.075
PVC - R10 <i>anti-slip</i>	25 mm x 10 m	5415.29.025
	50 mm x 10 m	5415.29.050
	75 mm x 10 m	5415.29.075



Marking tape with escape sign left

Material	Width x length	Item number
PVC <i>smooth</i>	25 mm x 10 m	5127.3-Li.B25
	50 mm x 10 m	5127.3-Li.B50
	75 mm x 10 m	5127.3-Li.B75
PVC - R10 <i>anti-slip</i>	25 mm x 10 m	5415.3-Li.B25
	50 mm x 10 m	5415.3-Li.B50
	75 mm x 10 m	5415.3-Li.B75



Marking tape with escape sign right

Material	Width x length	Item number
PVC <i>smooth</i>	25 mm x 10 m	5127.3-Re.B25
	50 mm x 10 m	5127.3-Re.B50
	75 mm x 10 m	5127.3-Re.B75
PVC - R10 <i>anti-slip</i>	25 mm x 10 m	5415.3-Re.B25
	50 mm x 10 m	5415.3-Re.B50
	75 mm x 10 m	5415.3-Re.B75



Marking tape with direction arrow green

Material	Width x length	Item number
PVC <i>smooth</i>	25 mm x 10 m	5127.1-02.B25
	50 mm x 10 m	5127.1-02.B50
	75 mm x 10 m	5127.1-02.B75
PVC - R10 <i>anti-slip</i>	25 mm x 10 m	5415.1-02.B25
	50 mm x 10 m	5415.1-02.B50
	75 mm x 10 m	5415.1-02.B75



Marking tape green

Material	Width x length	Item number
PVC <i>smooth</i>	25 mm x 10 m	5127.19.B25
	50 mm x 10 m	5127.19.B50
	75 mm x 10 m	5127.19.B75
PVC - R10 <i>anti-slip</i>	25 mm x 10 m	5415.1.19.B25
	50 mm x 10 m	5415.1.19.B50
	75 mm x 10 m	5415.1.19.B75



Marking tape with direction indication green

Material	Width x length	Item number
PVC <i>smooth</i>	25 mm x 10 m	5127.2-02.B25
	50 mm x 10 m	5127.2-02.B50
	75 mm x 10 m	5127.2-02.B75
PVC - R10 <i>anti-slip</i>	25 mm x 10 m	5415.2-02.B25
	50 mm x 10 m	5415.2-02.B50
	75 mm x 10 m	5415.2-02.B75



Marking tape with direction arrow black

Material	Width x length	Item number
PVC <i>smooth</i>	25 mm x 10 m	5127.1-07.B25
	50 mm x 10 m	5127.1-07.B50
	75 mm x 10 m	5127.1-07.B75
PVC - R10 <i>anti-slip</i>	25 mm x 10 m	5415.1-07.B25
	50 mm x 10 m	5415.1-07.B50
	75 mm x 10 m	5415.1-07.B75



Marking tape black

Material	Width x length	Item number
PVC <i>smooth</i>	25 mm x 10 m	5127.17.B25
	50 mm x 10 m	5127.17.B50
	75 mm x 10 m	5127.17.B75
PVC - R10 <i>anti-slip</i>	25 mm x 10 m	5415.1.17.B25
	50 mm x 10 m	5415.1.17.B50
	75 mm x 10 m	5415.1.17.B75



Marking tape with direction indication black

Material	Width x length	Item number
PVC <i>smooth</i>	25 mm x 10 m	5127.2-07.B25
	50 mm x 10 m	5127.2-07.B50
	75 mm x 10 m	5127.2-07.B75
PVC - R10 <i>anti-slip</i>	25 mm x 10 m	5415.2-07.B25
	50 mm x 10 m	5415.2-07.B50
	75 mm x 10 m	5415.2-07.B75



Stair markers

Material	Width x length	Item number
PVC <i>smooth</i>	37 mm x 160 mm	5127.Wi11.37-L
	47 mm x 160 mm	5127.Wi11.47-L
PVC - R10 <i>anti-slip</i>	37 mm x 160 mm	5415.Wi11.37-L
	47 mm x 160 mm	5415.Wi11.47-L



Round blanks

Material	Size Ø	Item number
PVC <i>smooth</i>	50 mm	5127.L72-50
	75 mm	5127.L72-75
PVC - R10 <i>anti-slip</i>	50 mm	5415.L72-50
	75 mm	5415.L72-75



Arrows

Material	Width x length	Item number
PVC <i>smooth</i>	90 mm x 145 mm	5127.00.003
	90 mm x 145 mm	5415.00.003

# Escape signs

## Ensure more safety in your company



**i** In accordance with **ASR A1.3 and 2.3**, escape routes must be equipped with long photoluminescent escape signs if no emergency lighting is available.

### Escape signs



Proper signage – since correct signing can save lives

- Extra high luminance **200/25 mcd/m<sup>2</sup>** (10min/60min) **according to DIN 67510 (Class C)**
- Current-independent, maintenance-free and fail-safe
- The right variant for every requirement
- Customisable upon request


**Material:** foil 0.1 mm  
luminescent foil 0.7 mm  
**Surface:** glossy  
**Assembly:**  
self-adhesive  
**Application area:**  
for smooth and gap-free substrates

**Material:** aluminium composite 2.0 mm  
luminescent aluminium composite 2.7 mm  
**Surface:** glossy  
**Assembly:**  
with self-adhesive or screw-in accessories  
**Application area:**  
for wall mounting indoors and outdoors


**Material:** plastic 1.0 mm  
luminescent plastic 1.7 mm  
**Surface:** glossy  
**Assembly:**  
with self-adhesive or screw-in accessories  
**Application area:**  
for wall mounting indoors



Exit  
(tried in practice)  
Motif number | **SR19**



Emergency exit  
(tried in practice)  
Motif number | **SR50**



Emergency exit  
(tried in practice)  
Motif number | **SR20**



Emergency ladder  
(tried in practice)  
Motif number | **SR21**

Include the motif number with the item number for the appropriate material: **SR19.FAB99.105** (Example for "Exit" - foil 105 x 300 mm)

Material	Width x length	Item number
Foil	105 x 300 mm	----FAB99.105
Foil	140 x 400 mm	----FAB99.140
Foil photoluminescent	105 x 300 mm	----FN81.105
Foil photoluminescent	140 x 400 mm	----FN81.140

Material	Width x length	Item number
Alu. composite 2 mm	105 x 300 mm	----DA90.105
Alu. composite 2 mm	140 x 400 mm	----DA90.140
Alu. composite photoluminescent	105 x 300 mm	----DAN80.105
Alu. composite photoluminescent	140 x 400 mm	----DAN80.140

Material	Width x length	Item number
Plastic 1 mm	105 x 300 mm	----PE00.105
Plastic 1 mm	140 x 400 mm	----PE00.140
Plastic photoluminescent	105 x 300 mm	----PEN90.105
Plastic photoluminescent	140 x 400 mm	----PEN90.140

Further rescue signs and individual solutions on request.







Escape route straight ahead, through the door, go up (ASR A1.3)

Motif number | **SR40**



Escape route go downwards (ASR A1.3)

Motif number | **SR43**



Escape route go left (ASR A1.3)

Motif number | **SR41**



Escape route go right (ASR A1.3)

Motif number | **SR44**



Escape route go left downwards (ASR A1.3)

Motif number | **SR45**




Escape route go left upwards (ASR A1.3)

Motif number | **SR42**



Escape route go right upwards (ASR A1.3)

Motif number | **SR47**



Escape route go right downwards (ASR A1.3)

Motif number | **SR46**

Include the motif number with the item number for the appropriate material: **SR40.FAB99.150** (Example for "Escape route straight ahead" - Foil 150 x 300 mm)

Material	Width x length	Item number
Foil	150 x 300 mm	----.FAB99.150
	200 x 400 mm	----.FAB99.200
Foil photoluminescent	150 x 300 mm	----.FN81.150
	200 x 400 mm	----.FN81.200

Material	Width x length	Item number
Alu. composite 2 mm	150 x 300 mm	----.DA90.150
	200 x 400 mm	----.DA90.200
Alu. composite photoluminescent	150 x 300 mm	----.DAN80.150
	200 x 400 mm	----.DAN80.200

Material	Width x length	Item number
Plastic 1 mm	150 x 300 mm	----.PE00.150
	200 x 400 mm	----.PE00.200
Plastic photoluminescent	150 x 300 mm	----.PEN90.150
	200 x 400 mm	----.PEN90.200



Escape route left (ASR A1.3)

Motif number | **SR01**




Escape route right (ASR A1.3)

Motif number | **SR02**




Direction indication (ASR A1.3)  
Only in conjunction with one other escape sign

Motif number | **SR03**



Direction indication (ASR A1.3)  
Only in conjunction with one other escape sign

Motif number | **SR06**




Assembly point (ASR A1.3)

Motif number | **SR08**




Eye wash equipment (ASR A1.3)

Motif number | **SR14**



Emergency shower (ASR A1.3)

Motif number | **SR13**



Stretcher (ASR A1.3)

Motif number | **SR11**



Emergency telephone (ASR A1.3)

Motif number | **SR10**



First aid (ASR A1.3)

Motif number | **SR07**

Include the motif number with the item number for the appropriate material: **SR01.FAB99.100** (Example for "Escape route left" - foil 100 mm)

Material	Width x Length	Item number
Foil	100 x 100 mm	----.FAB99.100
	150 x 150 mm	----.FAB99.150
	200 x 200 mm	----.FAB99.200
Alu. composite 2 mm	100 x 100 mm	----.DA90.100
	150 x 150 mm	----.DA90.150
	200 x 200 mm	----.DA90.200
Plastic 1 mm	100 x 100 mm	----.PE00.100
	150 x 150 mm	----.PE00.150
	200 x 200 mm	----.PE00.200

Material	Width x Length	Item number
Foil photoluminescent	100 x 100 mm	----.FN81.100
	150 x 150 mm	----.FN81.150
	200 x 200 mm	----.FN81.200
Alu. composite 2 mm photoluminescent	100 x 100 mm	----.DAN80.100
	150 x 150 mm	----.DAN80.150
	200 x 200 mm	----.DAN80.200
Plastic 1 mm photoluminescent	100 x 100 mm	----.PEN90.100
	150 x 150 mm	----.PEN90.150
	200 x 200 mm	----.PEN90.200

Material	Width x Length	Item number
Angular signs	150 x 150 mm	----.PEG00.150-150
	200 x 200 mm	----.PEG00.200-200
Angular signs photoluminescent	150 x 150 mm	----.PENG90.150-150
	200 x 200 mm	----.PENG90.200-200
Protruding signs	150 x 150 mm	----.PEH00.150-150
	200 x 200 mm	----.PEH00.200-200
Protruding signs photoluminescent	150 x 150 mm	----.PENH90.150-150
	200 x 200 mm	----.PENH90.200-200

Angular and protruding signs made of plastic 1 mm

# Fire protection signs

## Ensure more safety in your company



### Fire protection signs



Proper signage – since correct signing can save lives

- | Extra high luminance **200/25 mcd/m<sup>2</sup>** (10min/60min) **according to DIN 67510 (Class C)**
- | Current-independent, maintenance-free and fail-safe
- | The right variant for every requirement
- | Customisable upon request

**Material:** foil 0.1 mm  
luminescent foil 0.7 mm

**Surface:** glossy

**Assembly:**  
self-adhesive

**Application area:**  
for smooth and gap-free substrates

**Material:** aluminium composite 2.0 mm  
luminescent aluminium composite 2.7 mm

**Surface:** glossy

**Assembly:**  
with self-adhesive or screw-in accessories


**Application area:**  
for wall mounting indoors and outdoors

**Material:** plastic 1.0 mm  
luminescent plastic 1.7 mm


**Surface:** glossy

**Assembly:**  
with self-adhesive or screw-in accessories

**Application area:**  
for wall mounting indoors

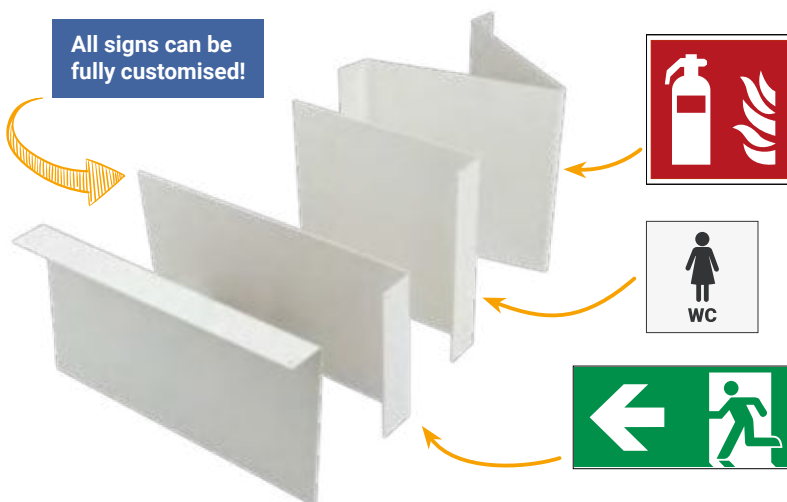

Signage must always be visible, especially in elongated rooms. Increase safety with the help of angle and flag signs to increase safety.


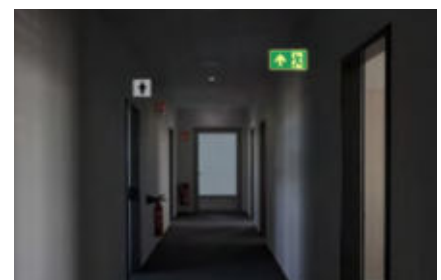


**Fire protection door**Fire protection door  
(DIN 4066)Motif number | **SB40****Fire-resistant door**distribution, adjustment etc.  
strictly forbidden!Fire resistant door with additional text  
(DIN 4066)Motif number | **SB42****FACP**FACP  
(DIN 4066)Motif number | **SB45****Fire protection door**distribution, adjustment etc.  
strictly forbidden!Fire protection door with additional text  
(DIN 4066)Motif number | **SB41****Do not use lift  
in case of fire**Do not use lift in case of fire  
(DIN 4066)Motif number | **SB44****FACP** →FACP direction  
(DIN 4066)Motif number | **SB46**Include the motif number with the item number for the appropriate material: **SB40.FAB99.150** (Example for "Escape route straight ahead" - foil 150 x 300 mm)

Material	Width x length	Item number
Foil	74 x 210 mm	----FAB99.074
	105 x 297 mm	----FAB99.105
	148 x 420 mm	----FAB99.148
Foil photoluminescent	74 x 210 mm	----FN81.074
	105 x 297 mm	----FN81.105
	148 x 420 mm	----FN81.148

Material	Width x length	Item number
Alu. composite 2 mm	74 x 210 mm	----DA90.074
	105 x 297 mm	----DA90.105
	148 x 420 mm	----DA90.148
Alu. composite 2 mm photoluminescent	74 x 210 mm	----DAN80.074
	105 x 297 mm	----DAN80.105
	148 x 420 mm	----DAN80.148

Material	Width x length	Item number
Plastic 1 mm	74 x 210 mm	----PE00.074
	105 x 297 mm	----PE00.105
	148 x 420 mm	----PE00.148
Plastic 2 mm photoluminescent	74 x 210 mm	----PEN90.074
	105 x 297 mm	----PEN90.105
	148 x 420 mm	----PEN90.148

Fire extinguisher  
(ASR A1.3)Motif number | **SB01**Fire alarm  
(ASR A1.3)Motif number | **SB02**Fire alarm telephone  
(ASR A1.3)Motif number | **SB03**Fire hose  
(ASR A1.3)Motif number | **SB04**Means and equipment for  
fire fighting (ASR A1.3)Motif number | **SB05**Fire ladder  
(ASR A1.3)Motif number | **SB06**Direction indication (ASR A1.3)  
Only in conjunction with  
another fire safety signMotif number | **SB07**Direction indication (ASR A1.3)  
Only in conjunction with  
another fire safety signMotif number | **SB08**Include the motif number with the item number for the appropriate material: **SB01.FAB99.100** (Example for "Fire extinguisher" - foil 100 mm)

Material	Width x Length	Item number
Foil	100 x 100 mm	----FAB99.100
	150 x 150 mm	----FAB99.150
	200 x 200 mm	----FAB99.200
Aluminium composite 2 mm	100 x 100 mm	----DA90.100
	150 x 150 mm	----DA90.150
	200 x 200 mm	----DA90.200
Plastic 1 mm	100 x 100 mm	----PE00.100
	150 x 150 mm	----PE00.150
	200 x 200 mm	----PE00.200

Material	Width x Length	Item number
Foil photoluminescent	100 x 100 mm	----FN81.100
	150 x 150 mm	----FN81.150
	200 x 200 mm	----FN81.200
Alu. composite 2 mm photoluminescent	100 x 100 mm	----DAN80.100
	150 x 150 mm	----DAN80.150
	200 x 200 mm	----DAN80.200
Plastic 1 mm photoluminescent	100 x 100 mm	----PEN90.100
	150 x 150 mm	----PEN90.150
	200 x 200 mm	----PEN90.200

Material	Width x Length	Item number
Angular signs	150 x 150 mm	----PEG00.150-150
	200 x 200 mm	----PEG00.200-200
Angular signs photoluminescent	150 x 150 mm	----PENG90.150-150
	200 x 200 mm	----PENG90.200-200
Protruding signs	150 x 150 mm	----PEH00.150-150
	200 x 200 mm	----PEH00.200-200
Protruding signs photoluminescent	150 x 150 mm	----PENH90.150-150
	200 x 200 mm	----PENH90.200-200

**Angular and protruding signs made of plastic 1 mm  
printed on both sides**

# Prohibitory signs

## Ensure more safety in your company



### Prohibitory signs



- Marking according to current ASR A1.3
- For wall, ground or machine, the right variant for every requirement

For the ground

**Material:** polycarbonate 0.7 mm  
**Surface:** matt  
**Assembly:** self-adhesive  
**Application area:** indoor for smooth and clean grounds particularly robust and impact-resistant

**Material:** PVC indoor 1.0 mm  
**Surface:** slightly glossy  
**Assembly:** self-adhesive  
**Application area:** indoor for different clean grounds slip-resistant surface R10

**Material:** PVC outdoor 1.1 mm  
**Surface:** slightly glossy  
**Assembly:** strong self-adhesive  
**Application area:** indoor and outdoor for different clean grounds slip-resistant surface R10

Wall mounting

**Material:** foil 0.1 mm  
**Surface:** glossy  
**Assembly:** self-adhesive  
**Application area:** indoor for smooth and clean substrates e.g. on doors or machines

**Material:** plastic 1.0 mm  
**Surface:** slightly glossy  
**Assembly:** with self-adhesive or screw-in accessories  
**Application area:** indoor for large or dirty substrates e.g. for indoor wall mounting

**Material:** aluminium composite 2.0 mm  
**Surface:** glossy  
**Assembly:** with self-adhesive or screw-in accessories  
**Application area:** indoor and outdoor for large or dirty substrates e.g. for outdoor wall mounting

### Individual combination signs

- Marking according to current ASR A1.3
- For wall, ground or machine, the right variant for every requirement




Material	HxW in mm	Item number
Foil	150 x 100	_K...FAB99.150
	300 x 200	_K...FAB99.300
Plastic 1 mm	300 x 200	_K...PE00.300
	450 x 300	_K...PE00.450
Aluminium composite 2 mm	450 x 300	_K...DA90.450
	600 x 400	_K...DA90.600
	750 x 500	_K...DA90.750

Include the motif number with the item number for the appropriate material and text:  
**SVK02.DA90.300** Text: **Do not deposit or store any items here**  
**Exaple for SV02** "Parking or storage prohibited" - aluminium composite 300 x 200mm



Prohibited for industrial trucks (ASR A1.3)

Motif number | **SV01**



Deposit or storage of items strictly forbidden (ASR A1.3)

Motif number | **SV02**



Depositing pallets prohibited (tried in practice)

Motif number | **SV28**



Pedestrians prohibited (ASR A1.3)

Motif number | **SV03**



No admission for unauthorised person (ASR A1.3)

Motif number | **SV06**



No smoking (ASR A1.3)

Motif number | **SV04**




No open flame, fire open ignition source and no smoking (ASR A1.3)

Motif number | **SV05**



Extinguishing with water prohibited (ASR A1.3)

Motif number | **SV13**



Passenger transport prohibited (ASR A1.3)

Motif number | **SV25**



Do not use lift in case of fire (ASR A1.3)

Motif number | **SV32**



Eating and drinking prohibited (ASR A1.3)

Motif number | **SV23**



Not drinking water (ASR A1.3)

Motif number | **SV22**



Spraying with water prohibited (ASR A1.3)

Motif number | **SV21**



Entering the area prohibited (ASR A1.3)

Motif number | **SV14**



Use of gloves prohibited (ASR A1.3)

Motif number | **SV07**



Switched on mobile phones prohibited (ASR A1.3)

Motif number | **SV20**



Non-heavy load (ASR A1.3)

Motif number | **SV10**



Switching prohibited (ASR A1.3)

Motif number | **SV12**



Do not climb (tried in practice)

Motif number | **SV16**



Do not climb (ASR A1.3)

Motif number | **SV11**



No access for persons with pacemakers or implants. Defibrillators (ASR A1.3)

Motif number | **SV26**



Prohibited for persons with metal implants (ASR A1.3)

Motif number | **SV27**



Do not reach indoor (ASR A1.3)

Motif number | **SV08**



Do not touch (ASR A1.3)

Motif number | **SV09**



General prohibition signs (ASR A1.3)

Motif number | **SV31**

Include the motif number with the item number for the appropriate material: **SV22.FAB99.100** (Example for "Not drinking water" - foil 100 mm)

Material	Ø in mm	Item number
Foil	75 mm	----FAB99.075
	100 mm	----FAB99.100
	200 mm	----FAB99.200
Plastic 1 mm	100 mm	----PE00.100
	200 mm	----PE00.200
	400 mm	----PE00.400

Material	Ø in mm	Item number
Aluminium composite 2 mm	100 mm	----DA90.100
	200 mm	----DA90.200
	400 mm	----DA90.400
	600 mm	----DA90.600
	800 mm	----DA90.800
	900 mm	----DA90.900

Material	Ø in mm	Item number
Polycarbonate	400 mm	----CA01.400
	600 mm	----CA01.600
	400 mm	----PA01.400
PVC indoor	600 mm	----PA01.600
PVC outdoor	400 mm	----PA04.400
	600 mm	----PA04.600

# Mandatory signs

## Ensure more safety in your company



### Mandatory signs



- | Marking according to current ASR A1.3
- | For wall, ground or machine, the right variant for every requirement

	For the ground	For the wall	For the machine
<b>Material:</b>	polycarbonate 0.7 mm	foil 0.1 mm	plastic 1.0 mm
<b>Surface:</b>	matt	glossy	slightly glossy
<b>Assembly:</b>	self-adhesive	self-adhesive	with self-adhesive or screw-in accessories
<b>Application area:</b>	indoor for smooth and clean grounds particularly robust and impact-resistant	indoor for smooth and clean substrates e.g. on doors or machines	indoor for large or dirty substrates e.g. for indoor wall mounting
<b>Material:</b>	PVC indoor 1.0 mm	aluminium composite 2.0 mm	
<b>Surface:</b>	slightly glossy	glossy	
<b>Assembly:</b>	self-adhesive	with self-adhesive or screw-in accessories	
<b>Application area:</b>	indoor for different clean grounds slip-resistant surface R10	indoor and outdoor for large or dirty substrates e.g. for outdoor wall mounting	
<b>Material:</b>	PVC outdoor 1.1 mm		
<b>Surface:</b>	slightly glossy		
<b>Assembly:</b>	strong self-adhesive		
<b>Application area:</b>	indoor and outdoor for different clean grounds slip-resistant surface R10		

### Individual combination signs

- | Marking according to current ASR A1.3
- | For wall, ground or machine, the right variant for every requirement



Material	HxW in mm	Item number
Foil	150 x 100	...K...FAB99.150
	300 x 200	...K...FAB99.300
Plastic 1 mm	300 x 200	...K...PE00.300
	450 x 300	...K...PE00.450
Aluminium composite 2 mm	450 x 300	...K...DA90.450
	600 x 400	...K...DA90.600
	750 x 500	...K...DA90.750

Include the motif number with the item number for the appropriate material and text:  
**SGK04.DA90.300 Text: Wear protective gloves**  
**Example for SG04** "Use protective gloves" - aluminium composite 300 x 200mm

### Further mandatory signs on request.





General mandatory signs (ASR A1.3)

Motif number | **SG17**



Use pedestrian walkway (ASR A1.3)

Motif number | **SG16**



Use ear protection (ASR A1.3)

Motif number | **SG02**



Use protective gloves (ASR A1.3)

Motif number | **SG04**



Wear safety footwear (ASR A1.3)

Motif number | **SG05**



Wear a safety hat (ASR A1.3)

Motif number | **SG03**



Use safety mask (ASR A1.3)

Motif number | **SG10**



Use eye protection (ASR A1.3)

Motif number | **SG01**



Wear dust mask (ASR A1.3)

Motif number | **SG26**



Wear protective clothing (ASR A1.3)

Motif number | **SG09**



Use skin protection (ASR A1.3)

Motif number | **SG13**



Wash hands (ASR A1.3)

Motif number | **SG14**



Wear protective apron (ASR A1.3)

Motif number | **SG08**



Wear high visibility vest (ASR A1.3)

Motif number | **SG06**



Read operating instructions (ASR A1.3)

Motif number | **SG36**

Include the motif number with the item number for the appropriate material: **SG04.FAB99.100** (Example for "Use protective gloves" - foil 100 mm)


Material	Ø in mm	Item number
Foil	75 mm	----FAB99.075
	100 mm	----FAB99.100
	200 mm	----FAB99.200
Plastic 1 mm	100 mm	----PE00.100
	200 mm	----PE00.200
	400 mm	----PE00.400

Material	Ø in mm	Item number
Aluminium composite 2 mm	100 mm	----DA90.100
	200 mm	----DA90.200
	400 mm	----DA90.400
	600 mm	----DA90.600
	800 mm	----DA90.800
	900 mm	----DA90.900

Material	Ø in mm	Item number
Polycarbonate	400 mm	----CA01.400
	600 mm	----CA01.600
	400 mm	----PA01.400
PVC indoor	600 mm	----PA01.600
PVC outdoor	400 mm	----PA04.400
	600 mm	----PA04.600

# Warning signs

## Ensure more safety in your company

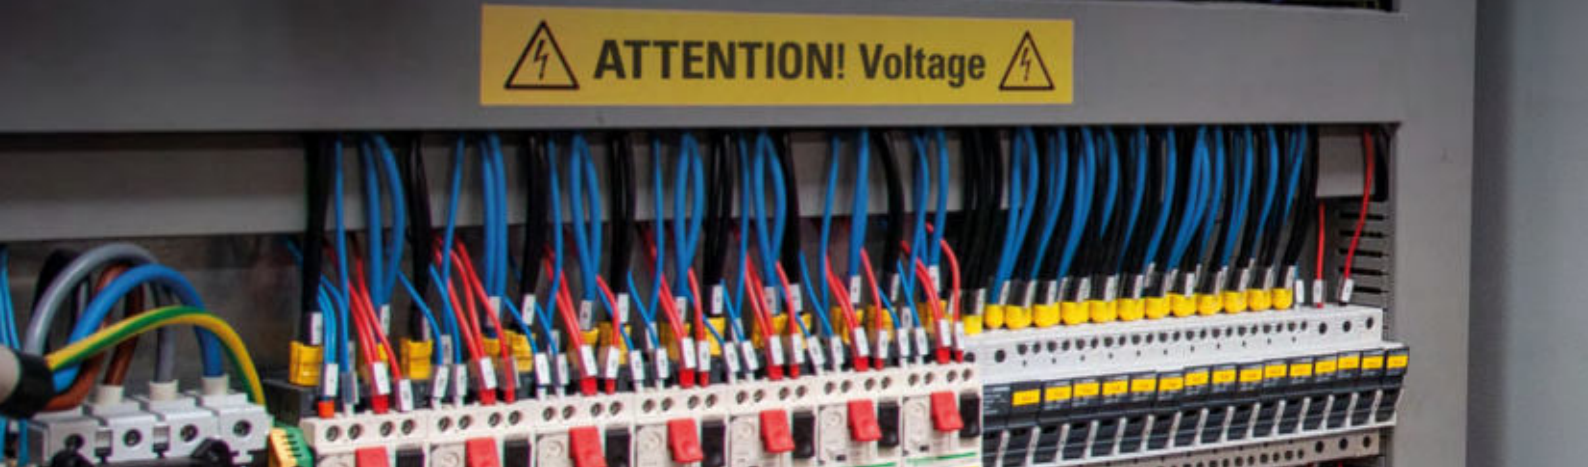

### Warning signs



- | Marking according to current ASR A1.3
- | For wall, ground or machine, the right variant for every requirement

For the ground

**Material:** polycarbonate 0.7 mm  
**Surface:** matt  
**Assembly:** self-adhesive  
**Application area:** indoor for smooth and clean grounds particularly robust and impact-resistant

**Material:** PVC indoor 1.0 mm  
**Surface:** slightly glossy  
**Assembly:** self-adhesive  
**Application area:** indoor for different clean grounds slip-resistant surface R10

**Material:** PVC outdoor 1.1 mm  
**Surface:** slightly glossy  
**Assembly:** strong self-adhesive  
**Application area:** indoor and outdoor for different clean grounds slip-resistant surface R10

Wall mounting

**Material:** foil 0.1 mm  
**Surface:** glossy  
**Assembly:** self-adhesive  
**Application area:** indoor for smooth and clean substrates e.g. on doors or machines

**Material:** plastic 1.0 mm  
**Surface:** slightly glossy  
**Assembly:** with self-adhesive or screw-in accessories  
**Application area:** indoor for large or dirty substrates e.g. for indoor wall mounting

**Material:** aluminium composite 2.0 mm  
**Surface:** glossy  
**Assembly:** with self-adhesive or screw-in accessories  
**Application area:** indoor and outdoor for large or dirty substrates e.g. for outdoor wall mounting

### Individual combination signs

- | Marking according to current ASR A1.3
- | For wall, ground or machine, the right variant for every requirement



Material	HxW in mm	Item number
Foil	150 x 100	...K...FAB99.150
	300 x 200	...K...FAB99.300
Plastic 1 mm	300 x 200	...K...PE00.300
	450 x 300	...K...PE00.450
Aluminium composite 2 mm	450 x 300	...K...DA90.450
	600 x 400	...K...DA90.600
	750 x 500	...K...DA90.750

Include the motif number with the item number for the appropriate material and text:

**SWK14.DA90.300 Text: Caution forklifts**

**Example for SW14** "Caution forklifts" - aluminium composite 300 x 200mm

**Further warning signs on request.**







General warning sign (ASR A1.3)  
Motif number | **SW01**



Warning of forklifts (ASR A1.3)  
Motif number | **SW14**



Warning of explosive atmosphere (ASR A1.3)  
Motif number | **SW27**



Warning against electrical voltage (ASR A1.3)  
Motif number | **SW12**



Warning against laser beams (ASR A1.3)  
Motif number | **SW04**



Warning against toxic substances (ASR A1.3)  
Motif number | **SW16**



Warning of flammable substances (ASR A1.3)  
Motif number | **SW21**



Warning of hot surface (ASR A1.3)  
Motif number | **SW17**



Risk of falling warning (ASR A1.3)  
Motif number | **SW08**



Risk of slipping warning (ASR A1.3)  
Motif number | **SW11**



Warning against opposing rollers (ASR A1.3)  
Motif number | **SW13**



Warning of floating load (ASR A1.3)  
Motif number | **SW15**



Warning of magnetic field (ASR A1.3)  
Motif number | **SW06**



Warning about danger through charging batteries (ASR A1.3)  
Motif number | **SW26**



Warning against radioactive substances or ionising radiation (ASR A1.3)  
Motif number | **SW03**

Include the motif number with the item number for the appropriate material: **SW01.FAB99.100** (Example for "General warning signs" - foil 100 mm)

Material	SL in mm	Item number
Foil	75 mm	----FAB99.075
	100 mm	----FAB99.100
	200 mm	----FAB99.200
Plastic 1 mm	100 mm	----PE00.100
	200 mm	----PE00.200
	400 mm	----PE00.400

Material	SL in mm	Item number
Aluminium composite 2 mm	100 mm	----DA90.100
	200 mm	----DA90.200
	400 mm	----DA90.400
	600 mm	----DA90.600
	800 mm	----DA90.800
	900 mm	----DA90.900

Material	SL in mm	Item number
Polycarbonate	400 mm	----CA01.400
	600 mm	----CA01.600
	400 mm	----PA01.400
PVC indoor	600 mm	----PA01.600
PVC outdoor	400 mm	----PA04.400
	600 mm	----PA04.600

# Block storage ,Ceiling & flag signs

## Flexible marking of storage locations



### Block storage and ceiling signs

Hanging exchangeable or fixed labelling

- For marking block bearings
- Format and size according to customer requirements
- Angular deflection allows better scanning of barcodes
- Retroreflective for large distances on request
- Font colour and background colour individually selectable

**Material:** rigid foam


**Material thickness:** 3 mm

**Scope of delivery:** supplied pre-drilled

**Mounting:** suitable accessories from page 79

**Maximum size:** 1200 x 1200 mm

**Application area:** indoor

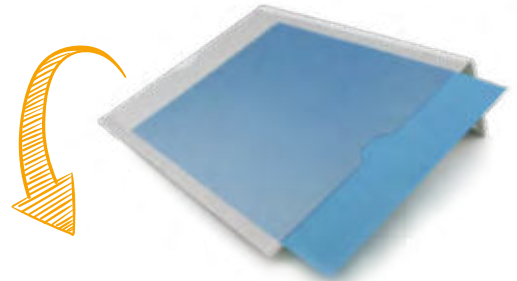

**Ideal for changing labelling!**



**Ceiling/block storage sign with insert pocket**  
Bevelling: 50 mm/for A4 landscape or A3 landscape

HxW in mm	Weight in kg	Item number
240 x 300 (A4)	approx. 0.3	LB99.SDBT.240-340.1
325 x 425 (A3)	approx. 0.4	LB99.SDBT.325-425.1



**Ceiling/block storage sign individually designable**  
Bevelling: 50 mm

HxW in mm	Weight in kg	Item number
240 x 300	approx. 0.2	LB99.SDB00.240-300.1
325 x 425	approx. 0.3	LB99.SDB00.325-425.1
600 x 800	approx. 0.9	LB99.SDB00.600-800.1



**Ceiling/block storage sign individually designable**

HxW in mm	Weight in kg	Item number
240 x 300	approx. 0.2	LB99.SDB00.240-300
325 x 425	approx. 0.3	LB99.SDB00.325-425
600 x 800	approx. 0.9	LB99.SDB00.600-800

**Insert pocket**

**Direct printed**

*\*Images similar/ Labels are for viewing purposes only*

# Flag signs

For flexible marking of aisles and shelves



- Information signs for individual warehouse labelling
- Optimal for frequently changing labelling
- Full-surface protection of documents due to PVC insert pocket
- High durability due to high-quality materials
- Further dimensions on request

**Material:** rigid foam


**Material thickness:** 3 mm

**Scope of delivery:** depending on item number with adhesive strip, magnetic strip or pre-drilled

**Application area:** indoor and outdoor

**Fully customisable or for self-labelling!**


Select a suitable mounting variant:

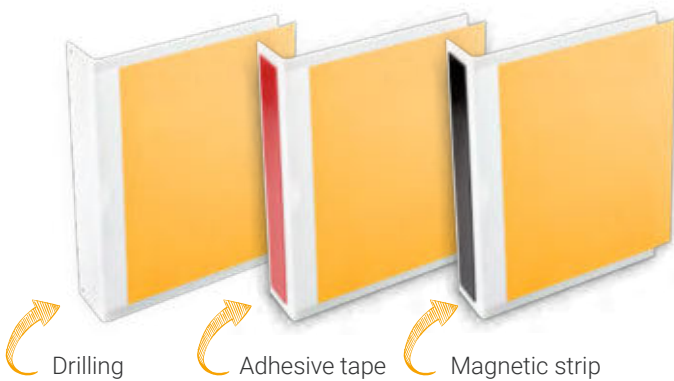

### Flag sign with insert pocket

Visual size: 240 mm x 305 mm / bevelling: 50 mm  
suitable for DIN for A4 / 297 x 210 mm

Material	Equipment	Item number
rigid foam 3 mm	drilled	LB99.SDHT0.240-305.1
	self-adhesive	LB99.SDHT1.240-305.1
	magnetic	LB99.SDHT2.240-304.1



### Flag sign customisable

Visual size: 240 mm x 305 mm / bevelling: 50 mm


Material	Finishing	Item number
rigid foam 3 mm	pre-drilled	LB99.SDH0.240-305.1
	self-adhesive	LB99.SDH1.240-305.1
	magnetic	LB99.SDH2.240-305.1



### Flag sign with insert pocket

Visual size: 240 mm x 305 mm / bevelling: 50 mm  
suitable for DIN A4 / 210 x 297 mm

Material	Equipment	Item number
rigid foam 3 mm	drilled	LB99.SDHT0.325-220.1
	self-adhesive	LB99.SDHT1.325-220.1
	magnetic	LB99.SDHT2.325-220.1



### Fahnenschild individuell gestaltbar

Visual size: 325 mm x 220 mm / bevelling: 50 mm

Material	Finishing	Item number
rigid foam 3 mm	pre-drilled	LB99.SDH0.325-220.1
	self-adhesive	LB99.SDH1.325-220.1
	magnetic	LB99.SDH2.325-220.1

Insert pocket

Direct printed

*\*Images similar/ Labels are for viewing purposes only*

# Shelf line & aisle signs

The basic order in the warehouse



## Shelf line and aisle signs

For marking shelves and storage areas



- | For marking the basic order in the warehouse
- | Highly visible on the front sides of shelves
- | Use for loading ramps, aisles, high racks, block storage areas
- | Customised production e.g. colours, company logo or special formats
- | Scalable font size for optimum legibility
- | Retroreflective for long distances on request

**Material:** rigid foam

**Material thickness:** 3 mm

**Scope of delivery:** NOT supplied pre-drilled

**Dimensions max:** 1000 x 2000 mm

**Application area:** indoor

**Fully individual design!**

**! Note: The required chains, ceiling magnets and hooks can be found from page 77 onwards!**



### Standard sizes for individual labelling:

Height x Width	Weight in kg	Item number
400 x 400 mm	approx. 0,25	LB99.SD00.400-400
600 x 600 mm	approx. 0,55	LB99.SD00.600-600
800 x 800 mm	approx. 0,95	LB99.SD00.800-800

Mounting example with spiral springs:



or with magnetic or adhesive tape:

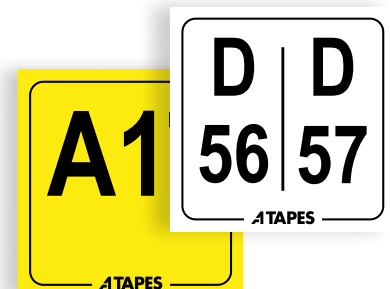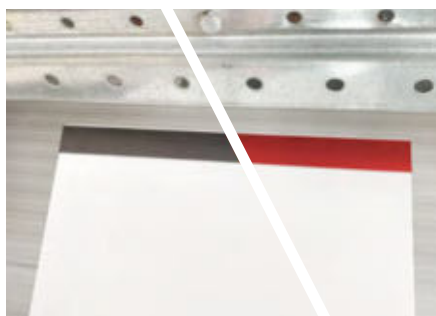

All signs can be fully customised to your wishes!

# Wall signs

## For durable marking of halls



### Aluminium composite signs

For explicit marking of areas and gates

- For marking zones and loading ramps
- Resistant to weather conditions and temperature fluctuations
- Individual sign with desired text, symbol, colour or logo



**Note:** The required chains, ceiling magnets and hooks can be found from page 77 onwards!

**Material:** aluminium composite

**Material thickness:** 3.0 mm

**Surface:** glossy

**Scope of delivery:** NOT supplied pre-drilled

**Application:** for wall mounting indoors and outdoors

**Fully individual design!**

#### Standard sizes for individual labelling:

Height x Width	Item number
800 mm x 1800 mm	LB99.DB90.800-1800
1000 mm x 2000 mm	LB99.DB90.1000-2000
1200 mm x 2400 mm	LB99.DB90.1200-2400

**Further sizes and materials on request!**  
We will advise you on your choice.



# Ceiling hanger

Optimum visibility at a long distance



# Cube & Triangle

Optimum visibility at a long distance



- Easily visible from a great distance
- Printing on all sides
- Customised production e.g. colours, company logo or special formats
- Scalable font size for optimum legibility

**Material:** rigid foam

**Material thickness:** 3 mm

**Scope of delivery:** supplied with drilled hole

**Mounting:** matching accessories page 77

**Application area:** indoor

**Fully individual design!**



Ceiling cube (4-sided)

Dimensions (HxW)	Weight	Item number
400 mm x 400 mm	approx. 1.5 kg	LB99.SDK00.400-400
600 mm x 600 mm	approx. 3.3 kg	LB99.SDK00.600-600



Ceiling triangle (3-sided)

Dimensions (HxW)	Weight	Item number
400 mm x 400 mm	approx. 1,0 kg	LB99.SDD00.400-400
600 mm x 600 mm	approx. 2,2 kg	LB99.SDD00.600-600

**! Note: The required chains, ceiling magnets and hooks can be found on page 77!**



**For a quick delivery we need the following information:**

- Design:** ceiling cube or ceiling triangle
- Dimensions:** height x width, e.g. 400 x 400 mm, 600 x 600 mm
- Colour:** all colour combinations possible e.g. black on yellow, black on white
- Text/Content:** as specified by excel list
- Barcode-System:** e.g. Code 128, Code 39, QR code
- Number of pieces**



01

26





02-02-02

26 02-02-10

# Labels

Plastic labels

Foil labels

Magnetic labels

# Labels for storage and shelves

Clear marking of storage spaces

High-quality labels for every requirement

02-01

26 02-02-02

26 02-02-03

## Plastic labels, reinforced

High-quality labels for every requirement

- | Extremely resistant
- | Very suitable for recesses in the profile
- | Self-adhesive
- | Abrasion resistant print

**Material:** polycarbonate

**Material thickness:** 0.7 mm

**Surface:** matt

**Adhesive:** acrylic

**Application area:** indoor



Cover profile rails with strong plastic labels



For a quick delivery we need the following information:

**Material:**

foil, polycarbonate, magnet, RA1, freezer foil

**Dimensions:**

height x width, e.g. 50 x 100 mm, ...

**Colour:**


all colour combinations possible!  
e.g. black/yellow, black/white, ...

**Text/Content:**

as specified by excel list

**Barcode-System:**

e.g. Code 128, Code 39, QR-Code



## Foil labels

High-quality labels for every requirement



- For smooth, gap-free substrates
- Self-adhesive, resistant, easy to apply
- High tear resistance
- Abrasion resistant solvent print

**Material:** foil

**Material thickness:** 0.2 mm

**Surface:** matt or glossy

**Protective laminate:** on request

**Adhesive:** acylic

**Application area:** indoor



Also available with retroreflective foil available!



The labels are completely customised to your specifications!



## Magnetic labels

High-quality labels for every requirement



- Attachment to magnetic surfaces
- For variable shelf location labelling
- Different magnet variants (e.g. for deep-freeze areas)
- Quick and residue-free replacement
- Can be used flexibly

**Material:** magnetic foil

**Thickness:** 0.85 mm

**Surface:** matt

**Protective laminate:** on request

**Application area:** indoor



We produce individual magnetic labels according to your requirements. Tell us the desired size, colour and imprint.

# Anti-Stick Label Holder

## Schnell, effizient und nachhaltig etikettieren



Adhesive residue from old labels gives a disorganised impression and costs time and money. The special anti-stick foil creates a surface on which typical paper labels adhere, but can still be removed without leaving any residue.

The versatile Anti-Stick Label Holder brings new order, offers variable labelling of all shelf types and helps to create an efficient logistics process.

### Anti-Stick – roll

For crossbars and shelves



- | Excellent for shelf traverses
- | Remove paper labels **without leaving residues**
- | Adheres to all smooth surfaces
- | Simple and lasting application

**Material:** polyester foil  
**Material thickness:** 0.15 mm  
**Surface:** glossy (siliconised)  
**Adhesive:** acrylic  
**Application area:** indoor



Anti-Stick Label Holder - roll material

Height x width	Item no. / blank	Item no. / individual
35 mm x 10 m	2228.08.035-10	2228.99.035-10
100 mm x 10 m	2228.08.100-10	2228.99.100-10




## Anti-Stick – labels

### For boxes and containers



- Suitable as a base for reusable packaging, plastic crates, metal crates on supports on shelves and much more
- Remove paper labels **without adhesive residue**


**Material:** polyester  
**Material thickness:** 0.15 mm  
**Surface:** glossy (siliconised)  
**Adhesive:** acrylic



Height x width	Item number / blank	Item number / individual
105 mm x 160 mm	LB08.FC1f9.105-160	LB99.FC1f9.105-160
125 mm x 200 mm	LB08.FC1f9.125-200	LB99.FC1f9.125-200



No annoying scraping off of old labels!

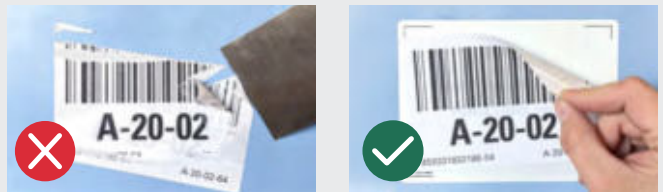

## Anti-Stick – magnetic labels

### For crossbars and shelves - magnetic



- Excellent for shelf traverses
- Remove paper labels **without leaving residues**
- Adheres to all ferrous surfaces
- Simple and lasting application

**Material:** magnetic foil  
**Material thickness:** 0.9 mm  
**Surface:** glossy (siliconised)  
**Application area:** indoor

Height x width	Item no. / blank	Item no. / individual
100 mm x 290 mm	LB08.MR1f0.100-290	LB99.MR1f0.100-290
100 mm x 870 mm	LB08.MR1f0.100-870	LB99.MR1f0.100-870



Example: 3 magnetic strips correspond to a crossbar with 3 slots



# Magnet and whiteboard solutions

## Without frame, made to measure and individually printed



### Whiteboard

Design and functionality with frameless whiteboard



- For individual labelling, scratch-resistant and dry-wipeable
- Magnetic surface (neodymium magnets recommended)
- Vertical or horizontal mounting
- Simple and secure mounting system with magnets
- Ideal for communication and meeting areas, training and workshop rooms, educational institutions, laboratories




Choose between your own design or one of our designs!

**Composition:** aluminium composite (3 mm) with magnetic coating

**Scope of delivery:** whiteboard incl. mounting material

**Print:** high-quality UV print

**Laminate:** whiteboard foil

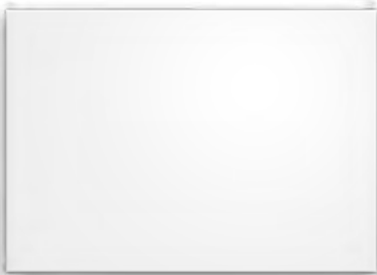

Whiteboard frameless unprinted

Size (HxW)	Item number
600 x 900 mm	9210.00.600-900
900 x 1200 mm	9210.00.900-1200
900 x 1800 mm	9210.00.900-1800



Whiteboard frameless individually printed

Size (HxW)	Item number
600 x 900 mm	9210.99.600-900
900 x 1200 mm	9210.99.900-1200
900 x 1800 mm	9210.99.900-1800



# Magnetic whiteboard foil

From the old to the new whiteboard



- Individual dimensions, shapes and prints
- Quick and easy to place
- Writeable and used flexibly
- Optimal for damaged whiteboard surfaces
- Suitable for all magnetic materials

**Material:** magnetic foil 0.90 mm  
**Mounting:** magnetic backside  
**Print:** high-quality UV print  
**Surface:** whiteboard foil  
**Dimension and shapes:** customisable, max. 100 cm x 250 cm



Quickly and easily place on the old board and cover up pollution.

## Whiteboard accessories

Order the matching accessories



Ø 30 mm

Neodymium Magnets	Item number
10 pieces/PU	9210.99.0017



Thumbs	Item number
10 (5 each) pieces/PU	9210.99.0015



Accessories-Set	Item number
45 parts/PU	9210.99.0016



Ø 50 mm

Smileys Set - 50mm	Item number
15 (5 each) pieces/PU	9210.99.0004



Ø 50 mm

Smileys "positiVe"	Item number
10 pieces/PU	9210.99.0001



Ø 50 mm

Smileys "neutral"	Item number
10 pieces/PU	9210.99.0002



Ø 50 mm

Smileys "negatiVe"	Item number
10 pieces/PU	9210.99.0003



Set  
75 x 75 mm

Sticky note magn.	Item number
20 (5 each) pieces/PU	9210.99.0009
20 (5 each) pieces/PU	9210.99.0014



red  
75 x 75 mm

Sticky note magn.	Item number
10 pieces/PU	9210.99.0005



green  
75 x 75 mm

Sticky note magn.	Item number
10 pieces/PU	9210.99.0006



blue  
75 x 75 mm

Sticky note magn.	Item number
10 pieces/PU	9210.99.0007



yellow  
75 x 75 mm

Sticky note magn.	Item number
10 pieces/PU	9210.99.0008

# Magnetic and adhesive pockets

Quick and easy to attach



## Magnetic info pockets

Present information in an eye-catching and clear way




- Quick and easy to attach
- Strongly adhesive magnets on the back
- Suitable for magnetic surfaces
- Residue-free removable and reusable
- Numerous colour variations

**Material:** PVC

**Material thickness:** 1.3 mm

**Surface:** slightly glossy

**Application area:** indoor

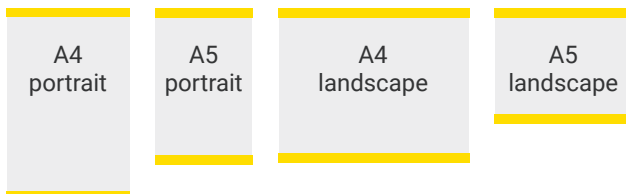

	A4 portrait indoor: 297 x 210 mm exterior: 329 x 212 mm	A4 landscape indoor: 210 x 297 mm exterior: 242 x 299 mm	A5 portrait indoor: 210 x 148 mm exterior: 242 x 150 mm	A5 landscape indoor: 148 x 210 mm exterior: 180 x 212 mm
<b>Colour</b>	<b>10 pieces/PU</b>	<b>10 pieces/PU</b>	<b>10 pieces/PU</b>	<b>10 pieces/PU</b>
yellow	9218.04.0-A4	9218.04.1-A4	9218.04.0-A5	9218.04.1-A5
red	9218.01.0-A4	9218.01.1-A4	9218.01.0-A5	9218.01.1-A5
blue	9218.10.0-A4	9218.10.1-A4	9218.10.0-A5	9218.10.1-A5
green	9218.02.0-A4	9218.02.1-A4	9218.02.0-A5	9218.02.1-A5
orange	9218.12.0-A4	9218.12.1-A4	9218.12.0-A5	9218.12.1-A5
white	9218.08.0-A4	9218.08.1-A4	9218.08.0-A5	9218.08.1-A5
grey	9218.11.0-A4	9218.11.1-A4	9218.11.0-A5	9218.11.1-A5
black	9218.07.0-A4	9218.07.1-A4	9218.07.0-A5	9218.07.1-A5

Back side with magnetic strip





# Self-adhesive info pockets

Placing notices easily



- Residue-free removable and reusable
- Washable adhesive tape
- Applicable in portrait and landscape format
- Quick and easy to attach
- Suitable for walls, doors, windows etc.
- Ideal for notices, offers, opening hours and many more
- Numerous colour variations

**Material:** PVC


**Material thickness:** 0.5 mm

**Surface:** slightly glossy

**Fastening:** self-adhesive

**Application area:** indoor

**Individually designable**

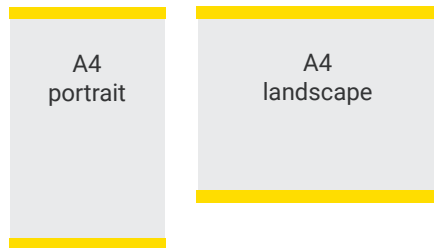


Colour	A4 portrait indoor: 297 x 210 mm exterior: 329 x 212 mm	A4 landscape indoor: 210 x 297 mm exterior: 242 x 299 mm
yellow	2 pieces/PU 4618.04.0-A4	2 pieces/PU 4618.04.1-A4
red	4618.01.0-A4	4618.01.1-A4
blue	4618.10.0-A4	4618.10.1-A4
green	4618.02.0-A4	4618.02.1-A4
white	4618.08.0-A4	4618.08.1-A4
grey	4618.11.0-A4	4618.11.1-A4
black	4618.07.0-A4	4618.07.1-A4

For further information or a request, please contact us



Remove liner

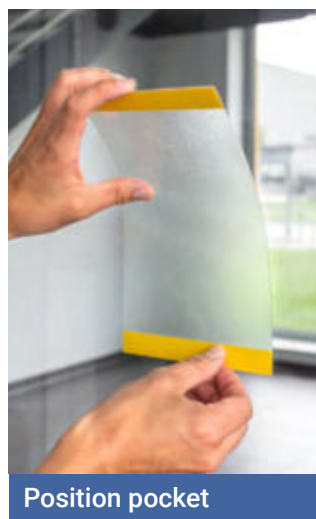

Position pocket



Insert info



Ready

# Spray stencils

For spray-on, roll-on or brush-on markings



**Spray stencils  
charging station 1**

Logo dimension mm	Item number
650 x 730 (HxB)	LSS.PC00.0003
325 x 370 (HxB)	LSS.PC00.0004



**Spray stencils  
parking space P**

Logo dimension mm	Item number
890 x 600 (HxB)	LSS.PC00.0005
450 x 300 (HxB)	LSS.PC00.0006



**Spray stencils  
wheelchair users**

Logo dimension mm	Item number
900 x 750 (HxB)	LSS.PC00.0001
450 x 370 (HxB)	LSS.PC00.0002



**Spray stencils  
pedestrian**

Logo dimension mm	Item number
1000 x 600 (HxB)	LSS.PC00.0007
500 x 300 (HxB)	LSS.PC00.0008



**Spray stencils  
charging station 2**

Logo dimension mm	Item number
380 x 1100 (HxB)	LSS.PC00.0011
190 x 550 (HxB)	LSS.PC00.0012



**Spray stencils  
bicycle**

Logo dimension mm	Item number
620 x 1000 (HxB)	LSS.PC00.0009
310 x 500 (HxB)	LSS.PC00.0010



**Spray stencils  
forklift**

Logo dimension mm	Item number
750 x 850 (HxB)	LSS.PC00.0013
370 x 425 (HxB)	LSS.PC00.0014

## Spray stencils

- For labelling and marking warehouse and storage locations
- Can be used on countless surfaces with paint spray
- Reusable
- Letter and number sets

**Material:** plastic

**Material thickness:** 0.2 mm

**Font:** DIN STENCIL FONT (other fonts by request)

**spray protection all around**

	Character height 50 mm	Character height 100 mm	Character height 200 mm	PU
A - Z	LSS.PC00.050-AZ	LSS.PC00.100-AZ	LSS.PC00.200-AZ	26 pieces/PU
0 - 9	LSS.PC00.050-09	LSS.PC00.100-09	LSS.PC00.200-09	10 pieces/PU

A	LSS.PC00.050-A	LSS.PC00.100-A	LSS.PC00.200-A	1 pieces/PU
B	LSS.PC00.050-B	LSS.PC00.100-B	LSS.PC00.200-B	1 pieces/PU
C	LSS.PC00.050-C	LSS.PC00.100-C	LSS.PC00.200-C	1 pieces/PU
D	LSS.PC00.050-D	LSS.PC00.100-D	LSS.PC00.200-D	1 pieces/PU
E	LSS.PC00.050-E	LSS.PC00.100-E	LSS.PC00.200-E	1 pieces/PU
F	LSS.PC00.050-F	LSS.PC00.100-F	LSS.PC00.200-F	1 pieces/PU
G	LSS.PC00.050-G	LSS.PC00.100-G	LSS.PC00.200-G	1 pieces/PU
H	LSS.PC00.050-H	LSS.PC00.100-H	LSS.PC00.200-H	1 pieces/PU
I	LSS.PC00.050-I	LSS.PC00.100-I	LSS.PC00.200-I	1 pieces/PU
J	LSS.PC00.050-J	LSS.PC00.100-J	LSS.PC00.200-J	1 pieces/PU
K	LSS.PC00.050-K	LSS.PC00.100-K	LSS.PC00.200-K	1 pieces/PU
L	LSS.PC00.050-L	LSS.PC00.100-L	LSS.PC00.200-L	1 pieces/PU
M	LSS.PC00.050-M	LSS.PC00.100-M	LSS.PC00.200-M	1 pieces/PU
N	LSS.PC00.050-N	LSS.PC00.100-N	LSS.PC00.200-N	1 pieces/PU
O	LSS.PC00.050-O	LSS.PC00.100-O	LSS.PC00.200-O	1 pieces/PU
P	LSS.PC00.050-P	LSS.PC00.100-P	LSS.PC00.200-P	1 pieces/PU
Q	LSS.PC00.050-Q	LSS.PC00.100-Q	LSS.PC00.200-Q	1 pieces/PU
R	LSS.PC00.050-R	LSS.PC00.100-R	LSS.PC00.200-R	1 pieces/PU
S	LSS.PC00.050-S	LSS.PC00.100-S	LSS.PC00.200-S	1 pieces/PU
T	LSS.PC00.050-T	LSS.PC00.100-T	LSS.PC00.200-T	1 pieces/PU
U	LSS.PC00.050-U	LSS.PC00.100-U	LSS.PC00.200-U	1 pieces/PU
V	LSS.PC00.050-V	LSS.PC00.100-V	LSS.PC00.200-V	1 pieces/PU
W	LSS.PC00.050-W	LSS.PC00.100-W	LSS.PC00.200-W	1 pieces/PU
X	LSS.PC00.050-X	LSS.PC00.100-X	LSS.PC00.200-X	1 pieces/PU
Y	LSS.PC00.050-Y	LSS.PC00.100-Y	LSS.PC00.200-Y	1 pieces/PU
Z	LSS.PC00.050-Z	LSS.PC00.100-Z	LSS.PC00.200-Z	1 pieces/PU

0	LSS.PC00.050-0	LSS.PC00.100-0	LSS.PC00.200-0	1 pieces/PU
1	LSS.PC00.050-1	LSS.PC00.100-1	LSS.PC00.200-1	1 pieces/PU
2	LSS.PC00.050-2	LSS.PC00.100-2	LSS.PC00.200-2	1 pieces/PU
3	LSS.PC00.050-3	LSS.PC00.100-3	LSS.PC00.200-3	1 pieces/PU
4	LSS.PC00.050-4	LSS.PC00.100-4	LSS.PC00.200-4	1 pieces/PU
5	LSS.PC00.050-5	LSS.PC00.100-5	LSS.PC00.200-5	1 pieces/PU
6	LSS.PC00.050-6	LSS.PC00.100-6	LSS.PC00.200-6	1 pieces/PU
7	LSS.PC00.050-7	LSS.PC00.100-7	LSS.PC00.200-7	1 pieces/PU
8	LSS.PC00.050-8	LSS.PC00.100-8	LSS.PC00.200-8	1 pieces/PU
9	LSS.PC00.050-9	LSS.PC00.100-9	LSS.PC00.200-9	1 pieces/PU

Ä	LSS.PC00.050-S1	LSS.PC00.100-S1	LSS.PC00.200-S1	1 pieces/PU
Ö	LSS.PC00.050-S2	LSS.PC00.100-S2	LSS.PC00.200-S2	1 pieces/PU
Ü	LSS.PC00.050-S3	LSS.PC00.100-S3	LSS.PC00.200-S3	1 pieces/PU
:	LSS.PC00.050-S4	LSS.PC00.100-S4	LSS.PC00.200-S4	1 pieces/PU
-	LSS.PC00.050-S5	LSS.PC00.100-S5	LSS.PC00.200-S5	1 pieces/PU
/	LSS.PC00.050-S6	LSS.PC00.100-S6	LSS.PC00.200-S6	1 pieces/PU
&	LSS.PC00.050-S7	LSS.PC00.100-S7	LSS.PC00.200-S7	1 pieces/PU



## Individual spray stencils

- With your logo, series of numbers, lettering or pictogram
- Other materials are also available by request



We would be happy to advise you!

## Masking tape

- For fastening spray templates
- Can easily be removed after marking



Crepe tape	Item number
25 mm x 50 m	5361.50.025

# Accessories

Useful aids for cleaning and assembly



## Cleaner

- For cleaning surfaces
- Degreases and dissolves soiling

**Content:** Isopropanol 70%  
250 ml

Isopropanol	Item number
250 ml	9104.SW.1745



## Magnetic tape

- For mounting signs
- Self-adhesive on one side

**Material:** magnetic tape  
**Material thickness:** 1.5 mm  
**Adhesive:** acrylate  
**Size:** 20 mm x 10 m

magnetic tape	Item number
1 roll	9201.2.05.025-10-1.5



## PE foam

- Double-sided adhesive tape for fastening and mounting
- For lightweight signs, mirrors, rails or screens
- Suitable on metal, plastic or glass

**Material:** PE foam  
**Material thickness:** 1.1 mm  
**Adhesive:** acrylate  
**Temp. resistance:** up to +80°C



Black	
Width x Length	Item number
12 mm x 10 m	4533.10.012
19 mm x 10 m	4533.10.019
25 mm x 10 m	4533.10.025

White	
Width x Length	Item number
12 mm x 10 m	4514.10.012
19 mm x 10 m	4514.10.019
25 mm x 10 m	4514.10.025

## Acrylic foam

- Double-sided adhesive tape for gluing signs
- For transparent and permanent bonding
- Suitable on glass, acrylic glass, stainless steel etc.

**Material:** pure acrylic foam  
**Material thickness:** 1.0 mm  
**Adhesive:** acrylate  
**Adhesion:** 37 N/24 mm  
**Colour:** highly transparent



Width x Length	Item number
12 mm x 11 m	4403.11.012
19 mm x 11 m	4403.11.019
25 mm x 11 m	4403.11.025

## Wiper

- For easily adhering of materials such as foil
- Degreases and dissolves dirt

**Colour:** white / creme

**Material:** plastic / felt

**Dimensions:** approx. 70 x 100 mm



Wiper	Item number
Plastic wiper	8000.01.022/1
Felt wiper	8000.01.025

## Masking tape

- For fixing and covering
- Residue-free removable

**Material:** paper / impregnated 60 g/m<sup>2</sup>

**Material thickness:** 0.135 mm

**Adhesive:** natural rubber



Width x length	Item number
19 mm x 50 m	5361.50.019
25 mm x 50 m	5361.50.025
38 mm x 50 m	5361.50.038
50 mm x 50 m	5361.50.050

## Screw set

- For fixing signs to the wall

**Scope of delivery:** 4x screws 4x35 mm  
4x cover  
4x dowels 6 mm



Screw set	Item number
Set of 4/PU	8008.00.105

## Hooks for signs

- Hook with C-opening for hanging up signs
- Optional in combination with knotted chain

**Material:** steel

**Wire thickness:** Ø 2 mm

**Length:** 39 mm



Hooks for signs	Item number
4 Pieces/PU	8008.00.121

## Pressure roller

- For laying markings and signs
- For pressing on profiled substrates
- For bubble-free pressing

**Short version (1):** rubber roller

**Roller width:** 55 mm

**Long version (2):** rubber roller

**Roller width:** 75 mm



Pressure roller	Item number
Short version (1)	8002.11.032
Long version (2)	8002.00.921

## Adhesive remover

- Removes adhesive residues quickly and thoroughly

**Adhesive remover**

500 ml (*hand sprayer*) 5004.54.006

1000 ml 5004.54.010



## Steel spiral springs

- For hanging up signs
- Excellent for signs on shelf ends
- Can be extended up to approx. 1.5 m

**Material:** steel

**Material thickness:** 2 mm

**Length:** 200 mm - 1.5 m

**Load capacity:** up to approx. 3.5 kg



Steel spiral springs	Item number
4 Pieces/PU	8008.00.120

## Knotted chain

- For fastening signs
- Optional in combination with sign hooks
- Reusable

**Material:** steel

**Wire thickness:** 1 mm

**Length:** 30 m



Knotted chain	Item number
1 roll	8008.00.122

# Clik-Clik

The magnetic mounting system for ceiling signs



Installation video

## Clik-Clik || WT-7071



Ceiling signs are part of a valuable strategy for presenting important information to your customers and employees. However, the installation of ceiling signs is often avoided because hanging them is considered difficult and dangerous.

The Clik-Clik system is a magnetic suspension system, that makes attaching or repositioning ceiling signs from any height easily, quickly and safely. A single person can install ceiling signs and displays from the floor in seconds.



01

Screw the Mag Mover to the Mag Pole.



02

First, attach the magnets to the Loop Line and then attach the Loop Line to your sign.



03

The prepared magnets can now be placed on the mounted Mag Mover.



04

Extend the Mag Pole to attach your sign to a metal surface.



## Mini Klik Magnets

- Neodymium magnets
- For fastening on magnetic surfaces and most industrial ceilings
- For very lightweight signage
- Incl. centre ring for attaching to the Loop

**Diameter:** 18 mm

**Retaining force:** 1 kg per magnet

Mini klik magnets	Item number
10 piece/PU	7071.69.3503



## Stick-n-Klik

- Self-adhesive metal plate
- For attaching signs to non-metallic substrates
- Suitable on all smooth surfaces

**Dimension:** 19 mm x 57 mm

Stick-n-Klik	Item number
10 piece/PU	7071.62.9020




## Mag Mover & Mag Pole

- For fastening and removing the magnets
- Adjustable attachment points at intervals of 11 cm - 61 cm
- Suitable for a max. ceiling height of 700 cm

**Material:** aluminium and fibreglass

**Telescopic pole, extendable:** 170 cm - 550 cm

Mag Mover & Mag Pole	Item number
1 piece/PU	7071.61.8001

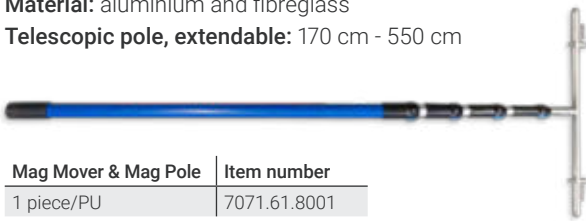

## Regular Klik Magnets

- Strong, plastic-coated neodymium magnets
- For fastening on magnetic surfaces and most industrial ceilings
- For lightweight signage
- Incl. centre ring for attaching to the Loop Line

**Dimension:** 42 mm x 14 mm x 5 mm

**Retaining force:** 2 kg per magnet

Regular klik magnets	Item number
10 piece/PU	7071.69.4299



## Super Klik Magnets

- Very strong, plastic-coated neodymium magnets
- For fastening on magnetic surfaces and most industrial ceilings
- For heavy signage
- Incl. centre ring for attaching to the Loop Line

**Dimension:** 58 mm x 20 mm x 15 mm

**Retaining force:** 4 kg per magnet

Super klik magnets	Item number
10 piece/PU	7071.69.5277



## Loop Line transparent

- Coil with 5 cm repeating loops that form a patented string
- Two strings with the same number of loops hang a sign exactly horizontally
- Strings are reusable

**Length:** 155 m


**Tensile strength:** 11 kg

Loop Line	Item number
1 pieces/PU	7071.67.0168







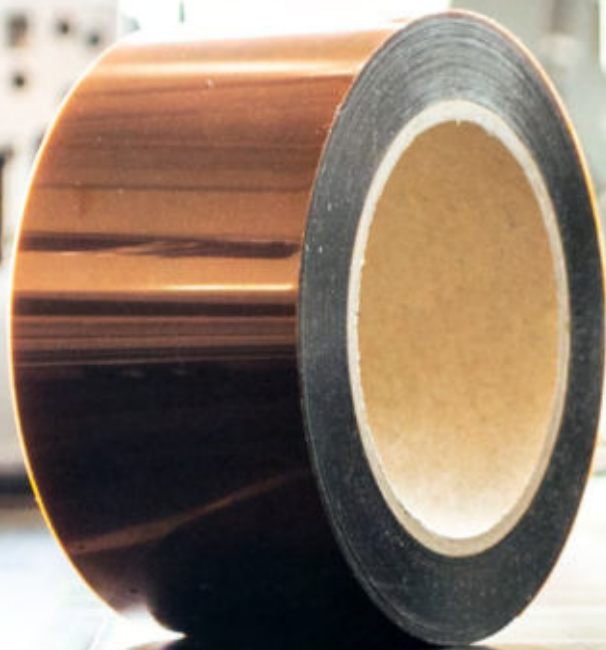

# Industrial tapes

Cloth adhesive tapes  
Double-sided adhesive tapes  
Single sided adhesive tapes

# Cloth tapes

For a multitude of universal application possibilities



## Adhesive cloth tape || WT-5562



The matt cloth tape for a number of application possibilities

- Ideal for binding, fastening, bundling, repairing or sealing
- Wide variety of colours perfect for industrial labelling
- Available in neon colours
- Matt, wear and tear resistant, can be labelled
- Can be removed from most surfaces without leaving residue

**Material:** PE-coated cloth

**Material thickness:** 0.3 mm

**Surface:** matt

**Adhesive:** natural rubber

**Application area:** indoor



Colour	25 mm x 50 m	38 mm x 50 m	50 mm x 50 m	75 mm x 50 m	100 mm x 50 m
yellow	5562.04.025	5562.04.038	5562.04.050	5562.04.075	5562.04.100
red	5562.01.025	5562.01.038	5562.01.050	5562.01.075	5562.01.100
green	5562.02.025	5562.02.038	5562.02.050	5562.02.075	5562.02.100
blue	5562.10.025	5562.10.038	5562.10.050	5562.10.075	5562.10.100
brown	5562.05.025	5562.05.038	5562.05.050	5562.05.075	5562.05.100
black	5562.07.025	5562.07.038	5562.07.050	5562.07.075	5562.07.100
white	5562.08.025	5562.08.038	5562.08.050	5562.08.075	5562.08.100
grey	5562.06.025	5562.06.038	5562.06.050	5562.06.075	5562.06.100

Colour	25 mm x 50 m	38 mm x 50 m	50 mm x 50 m	75 mm x 50 m	100 mm x 50 m
neon yellow	5562.31.025	5562.31.038	5562.31.050	5562.31.075	5562.31.100
neon green	5562.30.025	5562.30.038	5562.30.050	5562.30.075	5562.30.100
neon orange	5562.32.025	5562.32.038	5562.32.050	5562.32.075	5562.32.100
neon pink	5562.33.025	5562.33.038	5562.33.050	5562.33.075	5562.33.100

## Adhesive cloth patches || WT-5561



- Quick and easy to attach
- Universal application possibilities
- Excellent immediate adhesion
- Easy, residue-free removal

**Material:** PE-coated cloth  
**Material thickness:** 0.3 mm  
**Surface:** glossy  
**Adhesive:** natural rubber  
**Application area:** indoor  
**Quantity:** Dots: 4000 patches per roll  
 Rectangles: 5000 patches per roll



### Dots

Colour	30 mm
yellow	5561.04.R030
red	5561.01.R030
blue	5561.10.R030
green	5561.02.R030
white	5561.08.R030
grey	5561.13.R030
black	5561.07.R030

### Rectangles

Colour	30 mm x 15 mm
yellow	5561.04.030-15
red	5561.01.030-15
blue	5561.10.030-15
green	5561.02.030-15
white	5561.08.030-15
grey	5561.13.030-15
black	5561.07.030-15


## Adhesive cloth tape || WT-5561




The glossy cloth tape for a number of application possibilities

- Ideal for binding, fastening, bundling, repairing or sealing
- Wide variety of colours perfect for industrial labelling
- Quick and noticeable labelling of danger points
- Glossy, wear and tear resistant, can be labelled
- Can be removed from most surfaces without leaving residue

**Material:** PE-coated cloth  
**Material thickness:** 0.3 mm  
**Surface:** glossy  
**Adhesive:** natural rubber  
**Application area:** indoor

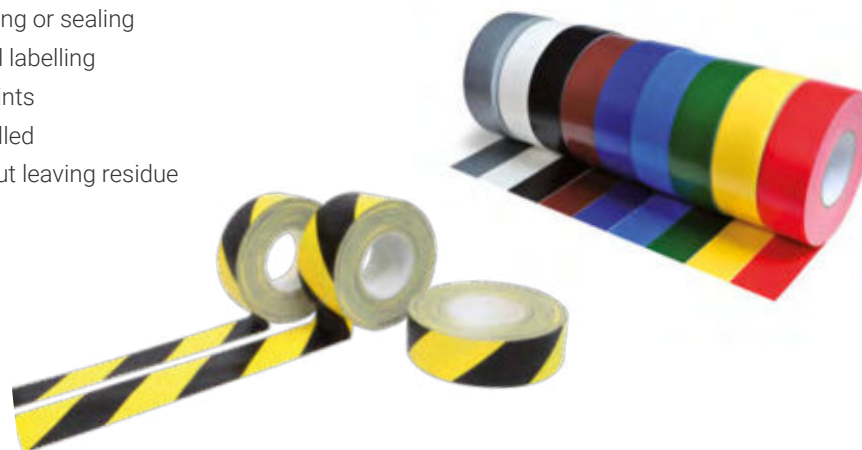

Colour	25 mm x 50 m	38 mm x 50 m	50 mm x 50 m	75 mm x 50 m	100 mm x 50 m
yellow/black pointing left	5561.17.025-Li	5561.17.038-Li	5561.17.050-Li	5561.17.075-Li	5561.17.100-Li
yellow/black pointing right	5561.17.025-Re	5561.17.038-Re	5561.17.050-Re	5561.17.075-Re	5561.17.100-Re
yellow	5561.04.025	5561.04.038	5561.04.050	5561.04.075	5561.04.100
black	5561.07.025	5561.07.038	5561.07.050	5561.07.075	5561.07.100
white	5561.08.025	5561.08.038	5561.08.050	5561.08.075	5561.08.100
red	5561.01.025	5561.01.038	5561.01.050	5561.01.075	5561.01.100
light green	5561.15.025	5561.15.038	5561.15.050	5561.15.075	5561.15.100
green	5561.02.025	5561.02.038	5561.02.050	5561.02.075	5561.02.100
light blue	5561.03.025	5561.03.038	5561.03.050	5561.03.075	5561.03.100
blue	5561.10.025	5561.10.038	5561.10.050	5561.10.075	5561.10.100
brown	5561.05.025	5561.05.038	5561.05.050	5561.05.075	5561.05.100
grey	5561.13.025	5561.13.038	5561.13.050	5561.13.075	5561.13.100



Point out left or right  
on a barrier or  
danger zone!

# Double-sided adhesive tapes

Technical tape for a multitude of application possibilities



## Fleece adhesive tape || WT-4112

Double-sided paper tissue tape that can be ripped off by hand

- | For self-adhesive finishing or splicing of foils, paper, cardboard, foams, textiles or plastics
- | Excellent adhesive properties with high initial adhesion
- | Works on uneven surfaces due to the low thickness

**Material:** paper tissue

**Material thickness:** 0.10 mm

**Colour:** transparent

**Adhesive:** acrylate, modified

**Adhesion:**  $\geq 19$  N / 25 mm

**Temp. resistance:** -20°C to +60°C (shortterm up to +80°C)

**Available width/length:** 6 mm – 1200 mm / 50 m, 100 m, 200 m



Width x length	12 mm x 50 m	19 mm x 50 m	25 mm x 50 m	50 mm x 50 m
Item number	4112.50.012	4112.50.019	4112.50.025	4112.50.050

## PET adhesive tape || WT-4210

### The strong double-sided PET foil tape

- Excellent adhesive properties, high initial and long-lasting adhesion
- Suitable for high- and low-energy surfaces
- Good UV and ageing resistance
- Universal and powerfully adhesive tape for versatile applications

**Material:** PET foil carrier

**Material thickness:** 0.205 mm

**Colour:** transparent

**Adhesive:** acrylate adhesive

**Adhesion on steel:** 20 min:  $\geq 18$  N / 24 mm

**Temp. resistance:** up to +60°C

**Available width/length:** 4 mm – 1000 mm / 25 m or 50 m



Width x length	12 mm x 25 m	12 mm x 50 m	19 mm x 25 m	19 mm x 50 m	25 mm x 25 m	25 mm x 50 m
Item number	4210.25.012	4210.50.012	4210.25.019	4210.50.019	4210.25.025	4210.50.025

## Acrylic foam || WT-4402

### Double-sided acrylate tape for long-lasting invisible bonding

- High immediate adhesion and extra strong adhesive power
- Especially for long-lasting and "invisible" bonding
- UV, plasticizer, weather and ageing resistant
- Best suited for glass, acrylic glass, plastic or stainless steel

**Material:** pure acrylic foam

**Material thickness:** 0.5 mm ( $\pm 10\%$ )

**Colour:** highly transparent

**Adhesive:** acrylate adhesive

**Adhesion on steel:** 20 min: 22 N/24 mm      72 h: 37 N/24 mm

**Temp. resistance:** +80°C (shortterm up to +150°C)

**Available width/length:** 6 mm – 450 mm / 11 m or 33 m



Width x length	12 mm x 11 m	12 mm x 33 m	19 mm x 11 m	19 mm x 33 m	25 mm x 11 m	25 mm x 33 m
Item number	4402.11.012	4402.33.012	4402.11.019	4402.33.019	4402.11.025	4402.33.025

## PE foam || WT-4514

### Double-sided foam tape for fastening and mounting

- High immediate adhesion and shear strength
- Good expansion compensation between different materials
- Vibration-damping
- For fastening rails, signs, mirrors, frames or screens

**Material:** PE foam (100 kg/m<sup>3</sup>)

**Material thickness:** 1.1 mm ( $\pm 10\%$ )

**Colour:** white

**Adhesive:** acrylate adhesive

**Temp. resistance:** up to 80°C

**Available width/length:** 6 mm – 1000 mm / 10 m or 50 m



Width x length	12 mm x 10 m	12 mm x 50 m	19 mm x 10 m	19 mm x 50 m	25 mm x 10 m	25 mm x 50 m
Item number	4514.10.012	4514.50.012	4514.10.019	4514.50.019	4514.10.025	4514.50.025

# One-sided adhesive tapes

## For covering and fastening



### Fineline masking tape || WT-5363

Ideal for use in wet varnishing

- | Masking tape made of very thin, waterproof low-crepe paper
- | Fine, exact colour boundaries on smooth and slightly rough surfaces
- | Heat and UV resistant
- | No shrinkage, easily removable with no residue

**Material:** fineline paper

**Material thickness:** 0.085 mm

**Colour:** orange

**Adhesive:** acrylate

**Adhesion:** 0,7 N/10 mm

**Temp. resistance:** up to +100°C

**Available width/length:** 5 mm – 1200 mm / 50 m



Width x length	19 mm x 50 m	38 mm x 50 m	50 mm x 50 m
Item number	5363.50.019	5363.50.038	5363.50.050

## PET high-temperature tape || WT-5230

- | For covering and fastening in high temperatures
- | High-performance silicone adhesive - comes off without leaving residue
- | Extremely heat and UV resistant
- | Suitable for covering circuit boards or powder coating

**Material:** polyester foil  
**Material thickness:** 0.05 mm  
**Overall thickness:** 0.09 mm  
**Colour:** green  
**Adhesive:** silicone adhesive  
**Adhesion:** 7.5 N/25mm  
**Elongation at break:** 90 %  
**Temp. resistance:** -50°C to +180°C (up to +220°C for short periods)  
**Available width/length:** 3 mm – 900 mm / 66 m



Width x length	12 mm x 66 m	19 mm x 66 m	38 mm x 66 m	50 mm x 66 m
Item number	5230.66.012	5230.66.019	5230.66.038	5230.66.050

## PET high-temperature tape || WT-5234

- | For covering and fastening in high temperatures
- | High-performance silicone adhesive - comes off without leaving residue
- | Extremely heat and UV resistant
- | Ideal for taping on intricate contours

**Material:** polyester foil  
**Material thickness:** 0.03 mm  
**Overall thickness:** 0.06 mm  
**Colour:** blue  
**Adhesive:** silicone adhesive  
**Adhesion:** 7.0 N/25mm  
**Elongation at break:** 30 %  
**Temp. resistance:** -50°C to +180°C (up to +220°C for short periods)  
**Available width/length:** 3 mm – 900 mm / 66 m



Width x length	12 mm x 66 m	19 mm x 66 m	38 mm x 66 m	50 mm x 66 m
Item number	5234.66.012	5234.66.019	5234.66.038	5234.66.050

## Polyimide film || WT-5231


- | For covering and fastening in high temperatures
- | High-performance silicone adhesive - comes off without leaving residue
- | Extremely heat and UV resistant
- | Excellent insulation properties

**Material:** one-sided adhesive polyimide film  
**Material thickness:** 0.025 mm  
**Colour:** amber  
**Adhesive:** silicone adhesive  
**Peel strength:** 600 gf/25mm ±10  
**Tensile strength:** 15~17 kg/25mm  
**Temp. resistance:** up to +260°C  
**Available width/length:** 3 mm – 900 mm / 33 m



Width x length	12 mm x 33 m	19 mm x 33 m	25 mm x 33 m	50 mm x 33 m
Item number	5231.33.012	5231.33.019	5231.33.025	5231.33.050

*Your specialist reseller/contact person:*

A large, empty rectangular box with a thin black border, intended for the user to enter the name and contact details of their specialist reseller or contact person.

Our GTC apply, you can find them on our website.  
Misprints, errors and changes reserved.