

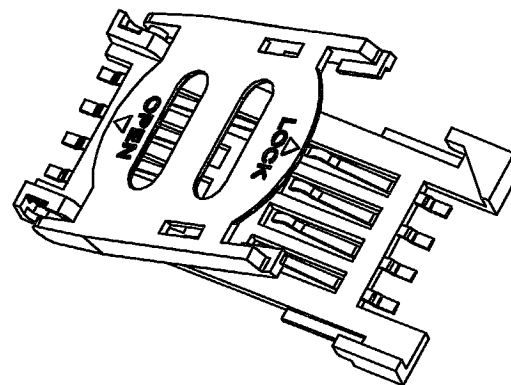
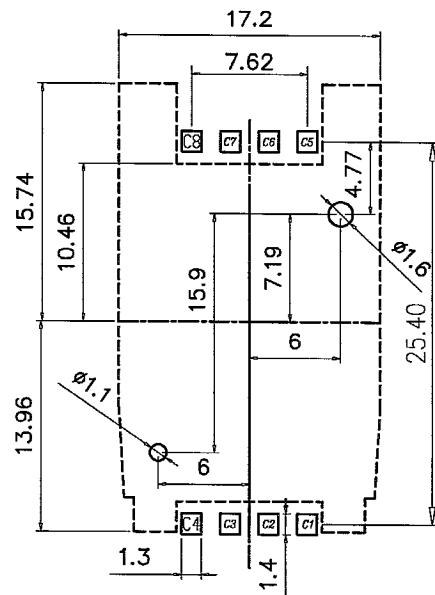



REV	MODIFICATION	DATE	DRAW
N	EN-12-0920	2012/09/26	Chris
O	EN-13-0524	2013/06/04	EvanTeng
P	ECN2-00000293	2015/09/14	Stacy

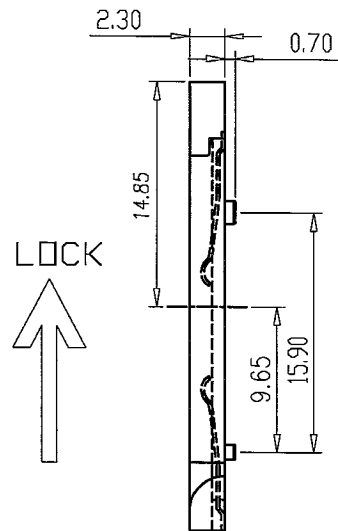

Notes:
 Material: Phosphor Bronze(C5191-H)
 SIM Card Connector,With
 Cover,Type 1,8 Pin
 Physical:
 Housing: LCP UL 94V-0
 Contact: Selective Gold Flash
 Specifications:
 Voltage Current rating: 1A. 50V AC
 Insulation Resistance: 1000Mohm Min
 Contact Withstanding Voltage:
 AC 500V For 1 Minute
 Temperture Rating: -40° To +85°

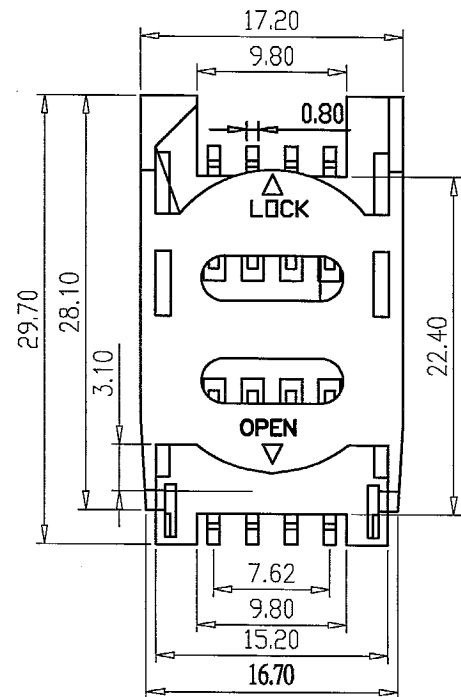


PCB LAYOUT RECOMMENDED

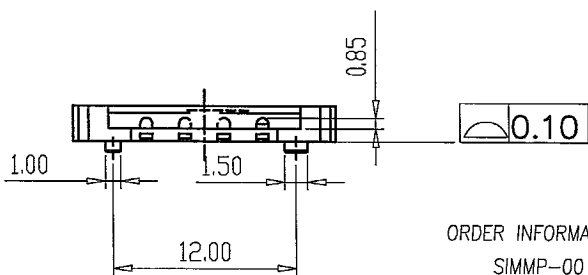

ORDER INFORMATION:
 SIMMP-00 X 01B2 X X - G
 COMPLY TO RoHS
 0:WITHOUT POST
 1:WITH POST
 0:TUBE
 1:T&R(800 PU/R)
 6:6PIN(REMOVE C4&C8)
 8:8PIN

DIMENSION IN mm [Inch]		PROD. SPEC.	KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE SIM CARD ACCEPTOR CUSTOMER DRAWING	
.X± 0.25	X.'± 2'	APPROVE <i>Gary</i>	FILE NO.	DWG NO. SIMMP-00X01B2XX-G
.XX± 0.15	.X'± 1'	CHECK <i>Stacy</i>	SIZE A4	PROJ. SHEET 1 / 2
.XXX± 0.10	.XX'±	DRAW <i>Stacy</i>	SCALE 2:1	REV P

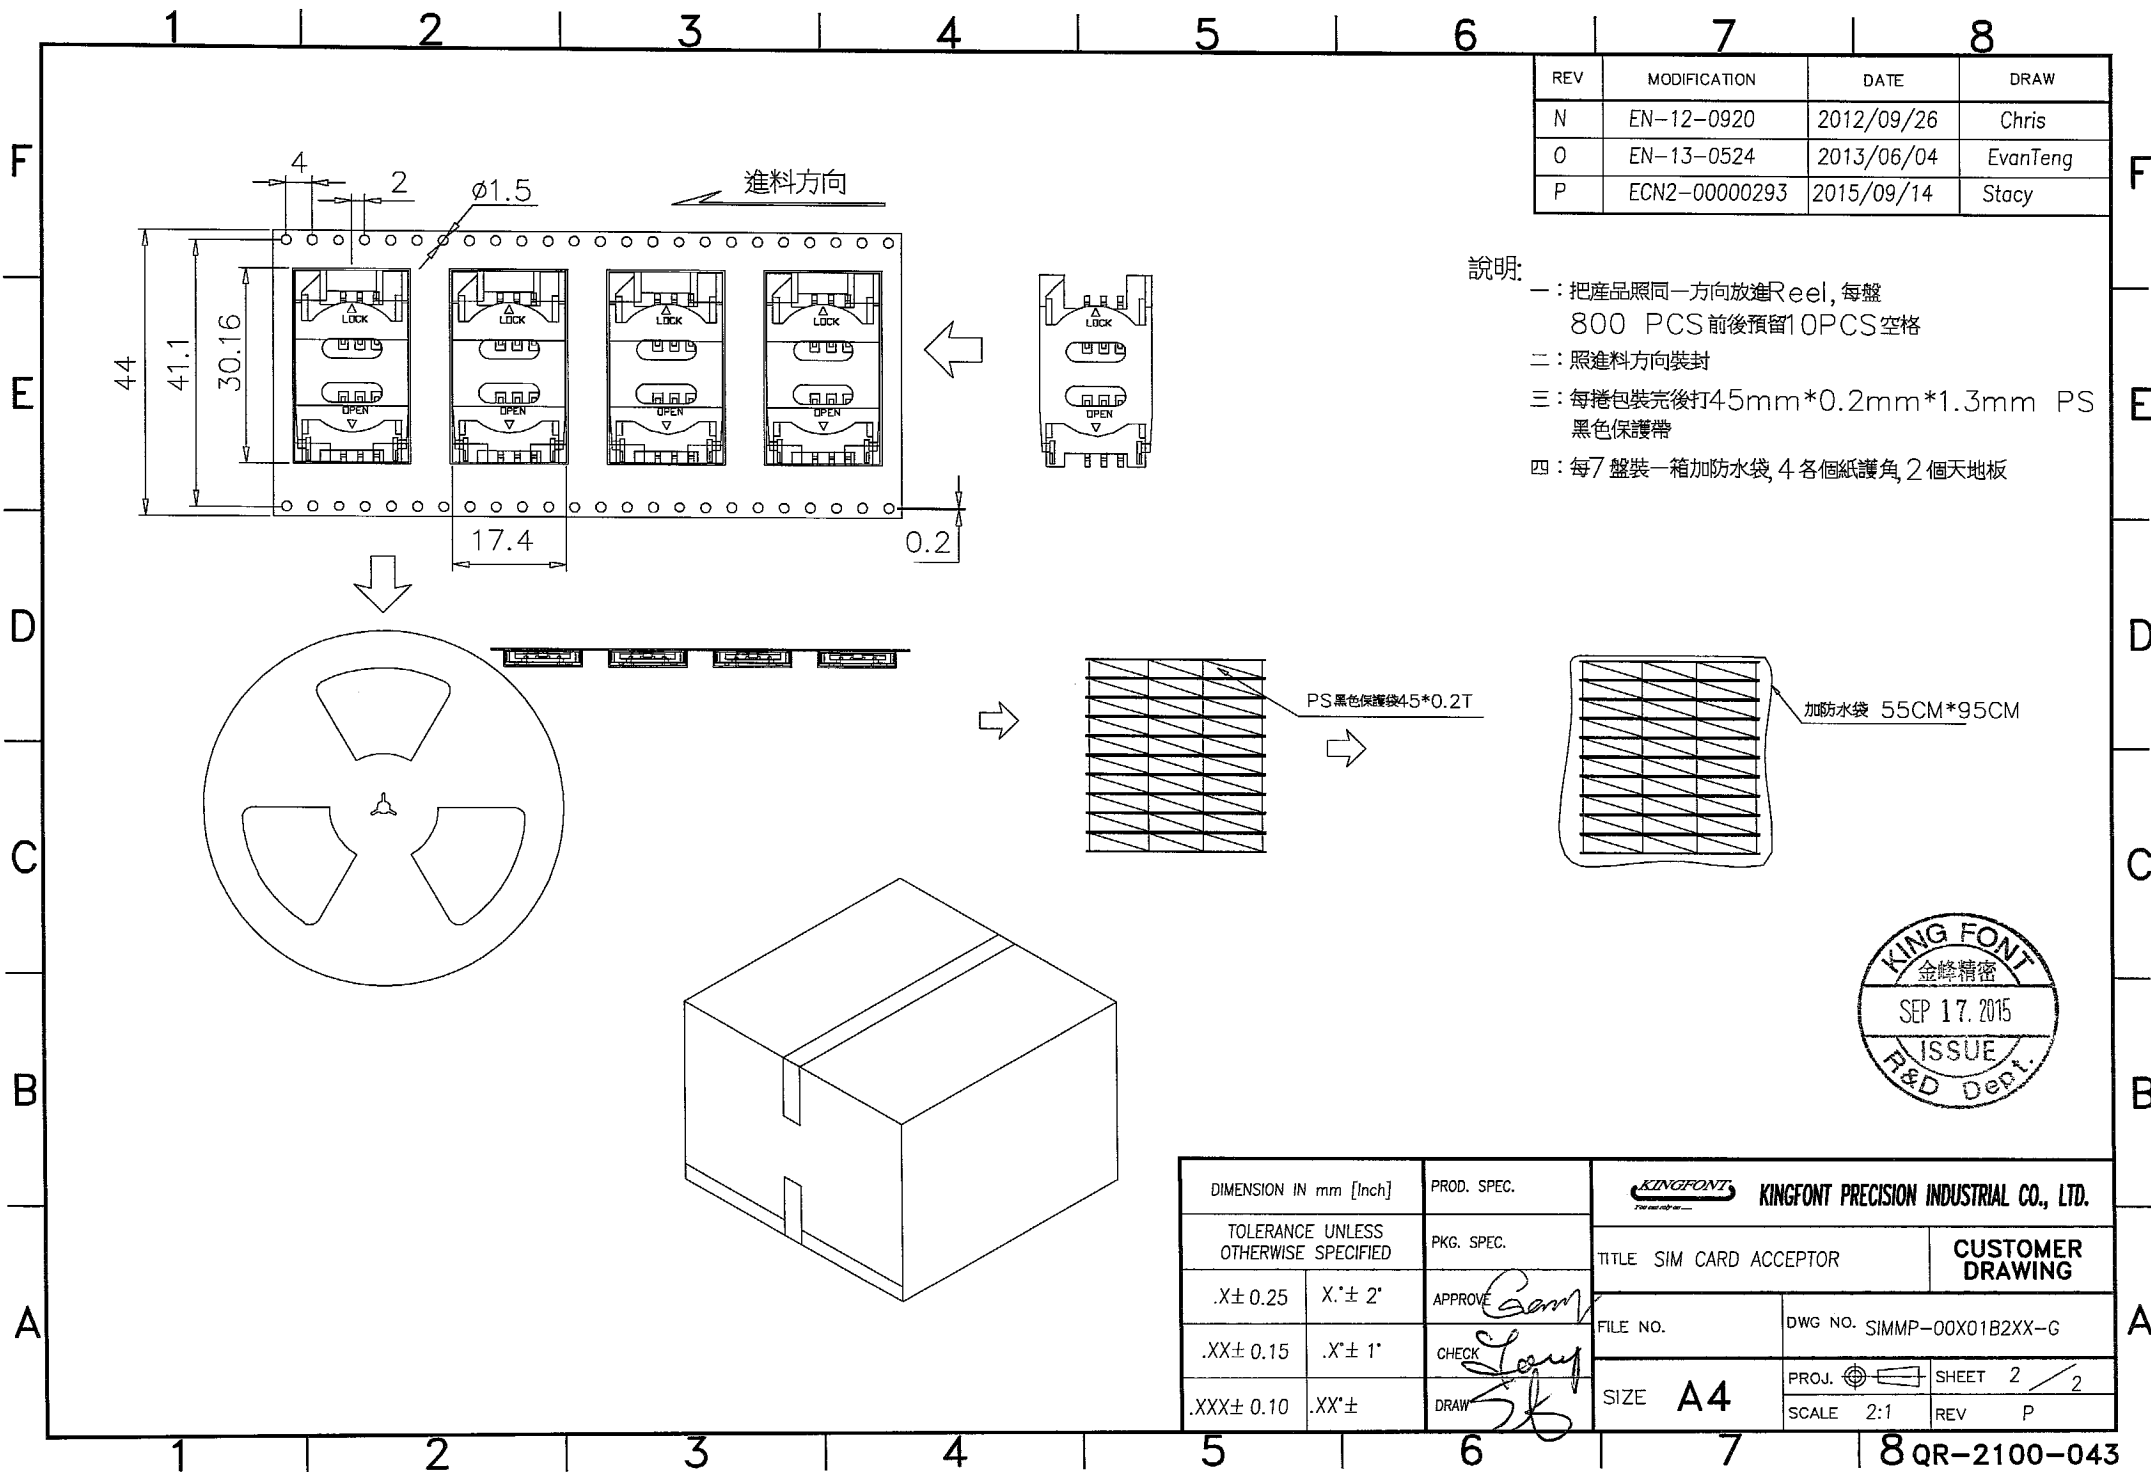

REV	MODIFICATION	DATE	DRAW
N	EN-12-0920	2012/09/26	Chris
O	EN-13-0524	2013/06/04	EvanTeng
P	ECN2-00000293	2015/09/14	Stacy

說明:

- 一: 把產品照同一方向放進Reel, 每盤 800 PCS 前後預留10PCS 空格
- 二: 照進料方向裝封
- 三: 每捲包裝完後打45mm*0.2mm*1.3mm PS 黑色保護帶
- 四: 每7 盤裝一箱加防水袋, 4 各個紙護角, 2 個天地板



DIMENSION IN mm [Inch]		PROD. SPEC.	KINGFONT PRECISION INDUSTRIAL CO., LTD.	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE SIM CARD ACCEPTOR	
.X±0.25	X.'± 2'	APPROVE <i>Sam</i>	FILE NO.	CUSTOMER DRAWING
.XX±0.15	.X'± 1'	CHECK <i>Stacy</i>	DWG NO. SIMMP-00X01B2XX-G	
.XXX±0.10	.XX'±	DRAW <i>Stacy</i>	SIZE A4	PROJ. SHEET 2 / 2
			SCALE 2:1	REV P